

LIST OF TRAFFIC CONTROL DEVICES *


MUTCD DEVICE NO.	NO.	FLASHERS		REMARKS	MUTCD DEVICE NO.	NO.	FLASHERS		REMARKS
		TYPE A	TYPE B				TYPE A	TYPE B	
R1-1	4			STOP	W20-1	14		14	ROAD WORK AHEAD
R2-1	18			SPEED LIMIT	W20-3	2		2	ROAD CLOSED AHEAD
R2-5c	4			SPEED ZONE AHEAD	W20-5	2		2	LANE CLOSED AHEAD
R3-2	4			NO LEFT TURN	W20-7a	2		2	FLAGGER
R3-7	1			RIGHT LANE MUST TURN RIGHT	W21-5	4		4	SHOULDER WORK
R4-1	3			DO NOT PASS					
R4-7	7			KEEP RIGHT	G20-2a	11			END ROAD WORK
R11-2	10			ROAD CLOSED					
R11-4	4			ROAD CLOSED TO THRU TRAFFIC					
W1-3	5		5	ROADWAY SHIFT					
W1-6	5			ROADWAY DIVERSION					
W4-2	1		1	LANE DROP					
W5-1	2		2	ROAD NARROWS					
W8-1	2		2	BUMP					
W8-9a	2		2	SHOULDER DROP-OFF					
W13-1	5			SPEED ADVISORY					

DELINEATORS & CHANNELIZATION DEVICES					
DEVICE	NO.	SIZE	FLASHERS		
			TYPE A	TYPE B	TYPE C
BARRICADES					
TYPE III	31	9' to 14'	62		
TYPE II					
TYPE I					
DRUMS	339				
CONES					
TUBES	69	18"			
VERTICAL PANELS					
SINGLE					
BACK TO BACK					
PAVEMENT MARKING	WHITE	YELLOW			
TYPE I 4" SOLID (Lin. Ft.)	3,670	7,106			
TYPE II 4" SOLID (Lin. Ft.)	22,210	29,800			
TEMPORARY STRIPING (Line Mile)					
TEMP. CONCRETE SAFETY BARRIER	290	10' Sections			
INERTIAL BARRIER SYSTEM	4				
ARROW DISPLAY	1				


* FOR INFORMATION ONLY

SEE SHEET NO. 102 FOR TRAFFIC CONTROL NOTES

ARROW DISPLAY

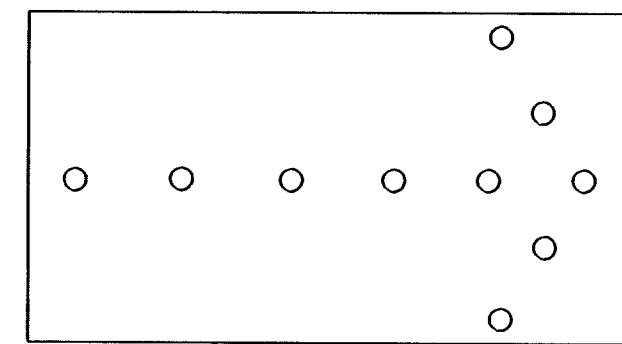

FLASHING ARROW

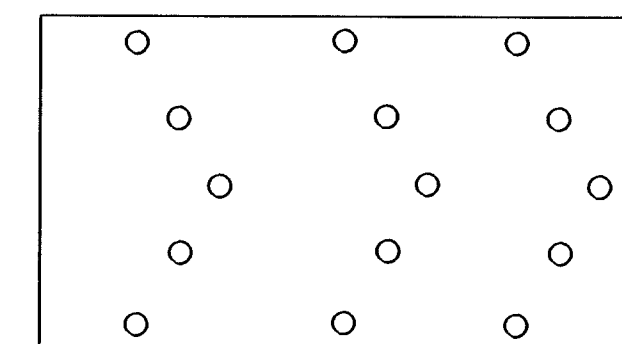

SEQUENTIAL CHEVRON

ARROW DISPLAY ELEMENTS SHALL BE CAPABLE OF A MINIMUM 50 PERCENT DIMMING FROM THEIR FULL-RATED LAMP VOLTAGE. FULL LAMP VOLTAGE SHOULD BE USED FOR DAY AND DIMMED MODE SHALL BE USED FOR NIGHT.

SUMMARY OF TRAFFIC CONTROL DEVICES

T.C. NO. 2.0

PREPARED BY
SEDGWICK COUNTY BUREAU OF PUBLIC SERVICES
HIGHWAY DIVISION

DAVID C. SPEARS, P.E. DIRECTOR/COUNTY ENGINEER

REVISED	SCALE	DESIGNED	TRACED	CHECKED	SHEET NO.
		M.R.B.	D.R.S.	M.R.B.	
		DATE 6/88	3/94	3/94	
PLANFILE TC-2-0			TOTAL SHEETS		