



| FHWA REGION NO. | STATE | PROJECT NO. | FISCAL YEAR | SHEET NO. | TOTAL SHEETS |
|-----------------|--------|-------------|-------------|-----------|--------------|
| 7 | KANSAS | 87N-0503-01 | 2009 | 55 | 101 |

FEDERAL Project No. ARRA-N050(301)

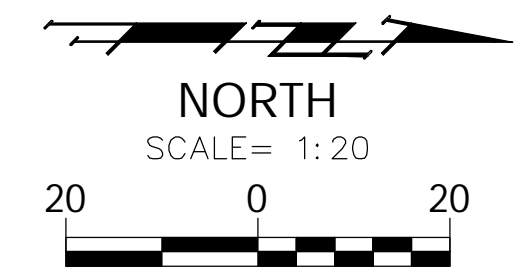


NOTES:
PAVEMENT MARKINGS:

All pavement markings shall be thermoplastic, unless otherwise approved by the Engineer. Pavement markings shall be installed per manufacturer's recommendations and shall conform to KDOT's 2007 Specification Book. Full Traffic may not be restored (and substantial Project Completion achieved) until all pavement markings are in place. Should construction timing be such that restoration of traffic becomes necessary during temperatures prohibiting the installation of thermoplastic markings, the Contractor shall install and maintain temporary markings until such time that thermoplastic markings may be properly installed. Except for material requirement, temporary pavement markings shall be placed equivalent, in every manner (i.e. dimension, frequency, spacing, etc.), to the permanent marking layout. The cost for temporary pavement markings will not be paid for directly, but shall be considered SUBSIDIARY to the bid item for "Pavement Markings".

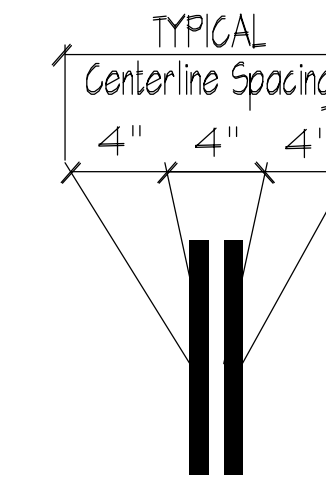

NOTE
All dimensions shown are to Centerline of Marking unless otherwise noted.

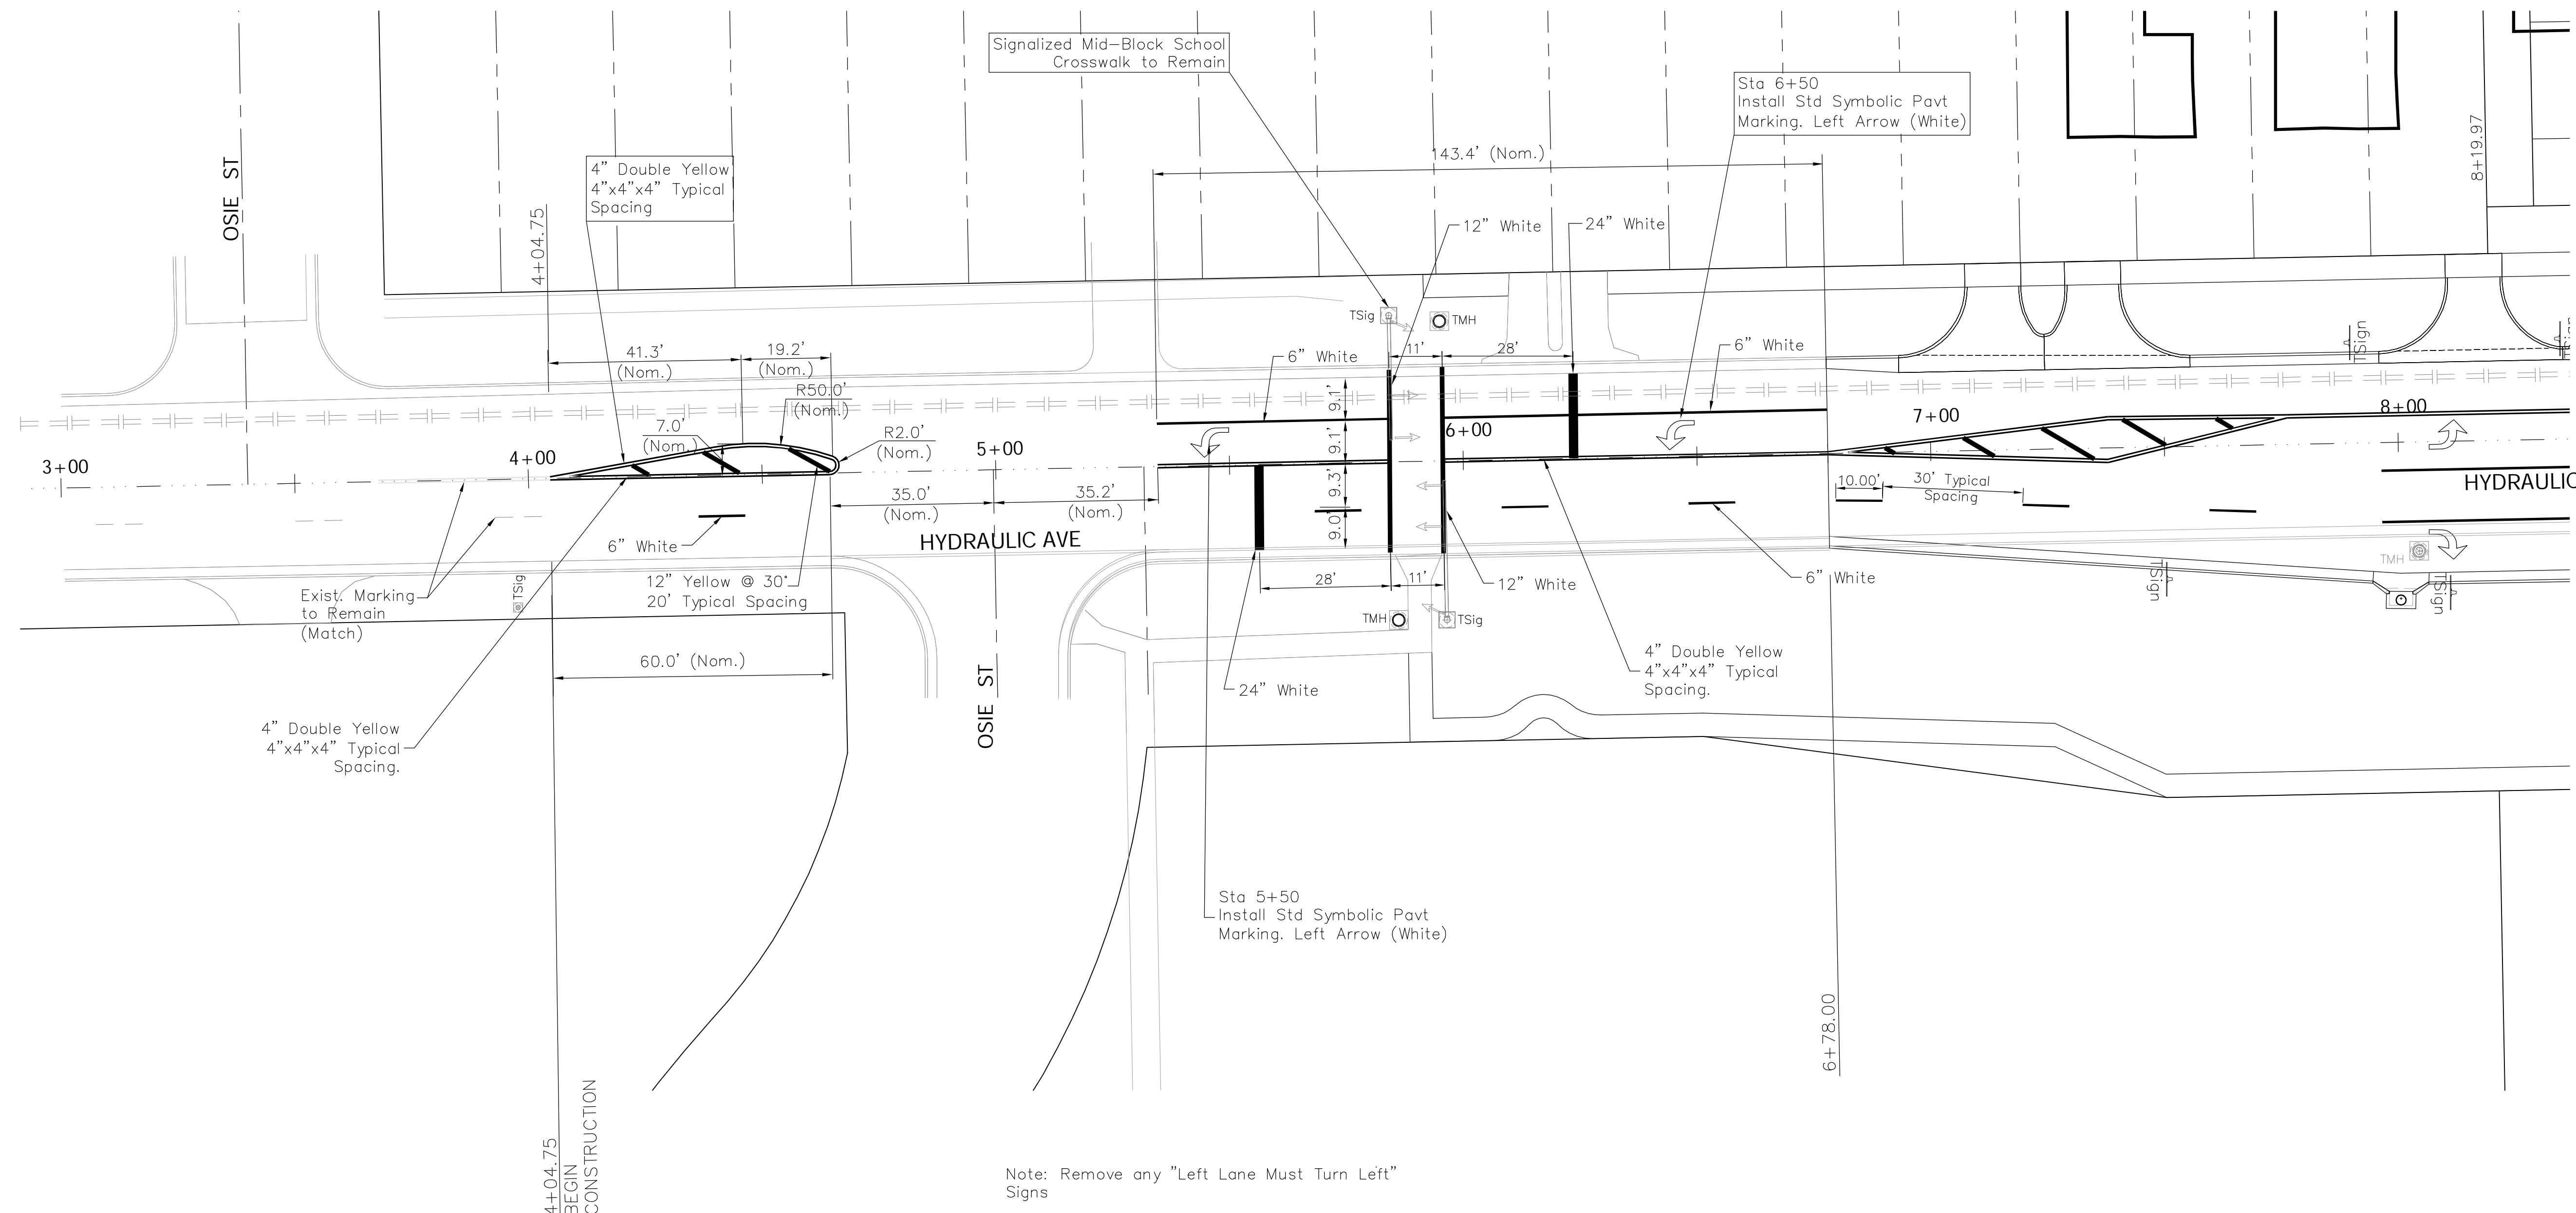

Note: Remove any "Left Lane Must Turn Left" Signs

* For Information Only

| PAVEMENT MARKING QUANTITIES - PROJECT TOTAL | | | | | | | |
|---------------------------------------------|-------------------------------|----------|-----------|------------|-----------|------------|-------------|
| Material | Lineal Feet of Thermoplastic: | | | | | | |
| | 4" YELLOW | 6" WHITE | 12" WHITE | 12" YELLOW | 24" WHITE | LEFT ARROW | RIGHT ARROW |
| TOTALS | 12289 | 1196 | 73 | 324 | 251 | 28 | 4 |

Drawing File: E:\eng\Hydraulic Kellogg to Harry Pav\Land\dwg\ACAD-Base (Marking & Signal).dwg
 Design: KK
 Drawn: STAFF
 Approved: JFB
 Scale: NOTED
 Project No: 07-104-988 CAPITAL IMPROVEMENT PROJECT
SIGNING AND MARKING PLAN
 Hydraulic - Harry to Kellogg
 STAFF

Baughman Company, P.A.
 315 Ellis St. Wichita, KS 67211 P 316-262-1271 F 316-262-0149
 ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE