

BENCHMARKS:

BM #1: C.O.W. Disc top of Curb adjacent to FH between Lot's 10 & 11, Block C.


Elevation = 93.70 City Datum

BM #2: City of Wichita Disc adjacent to FH on NE Corner of Leonine & Angel.

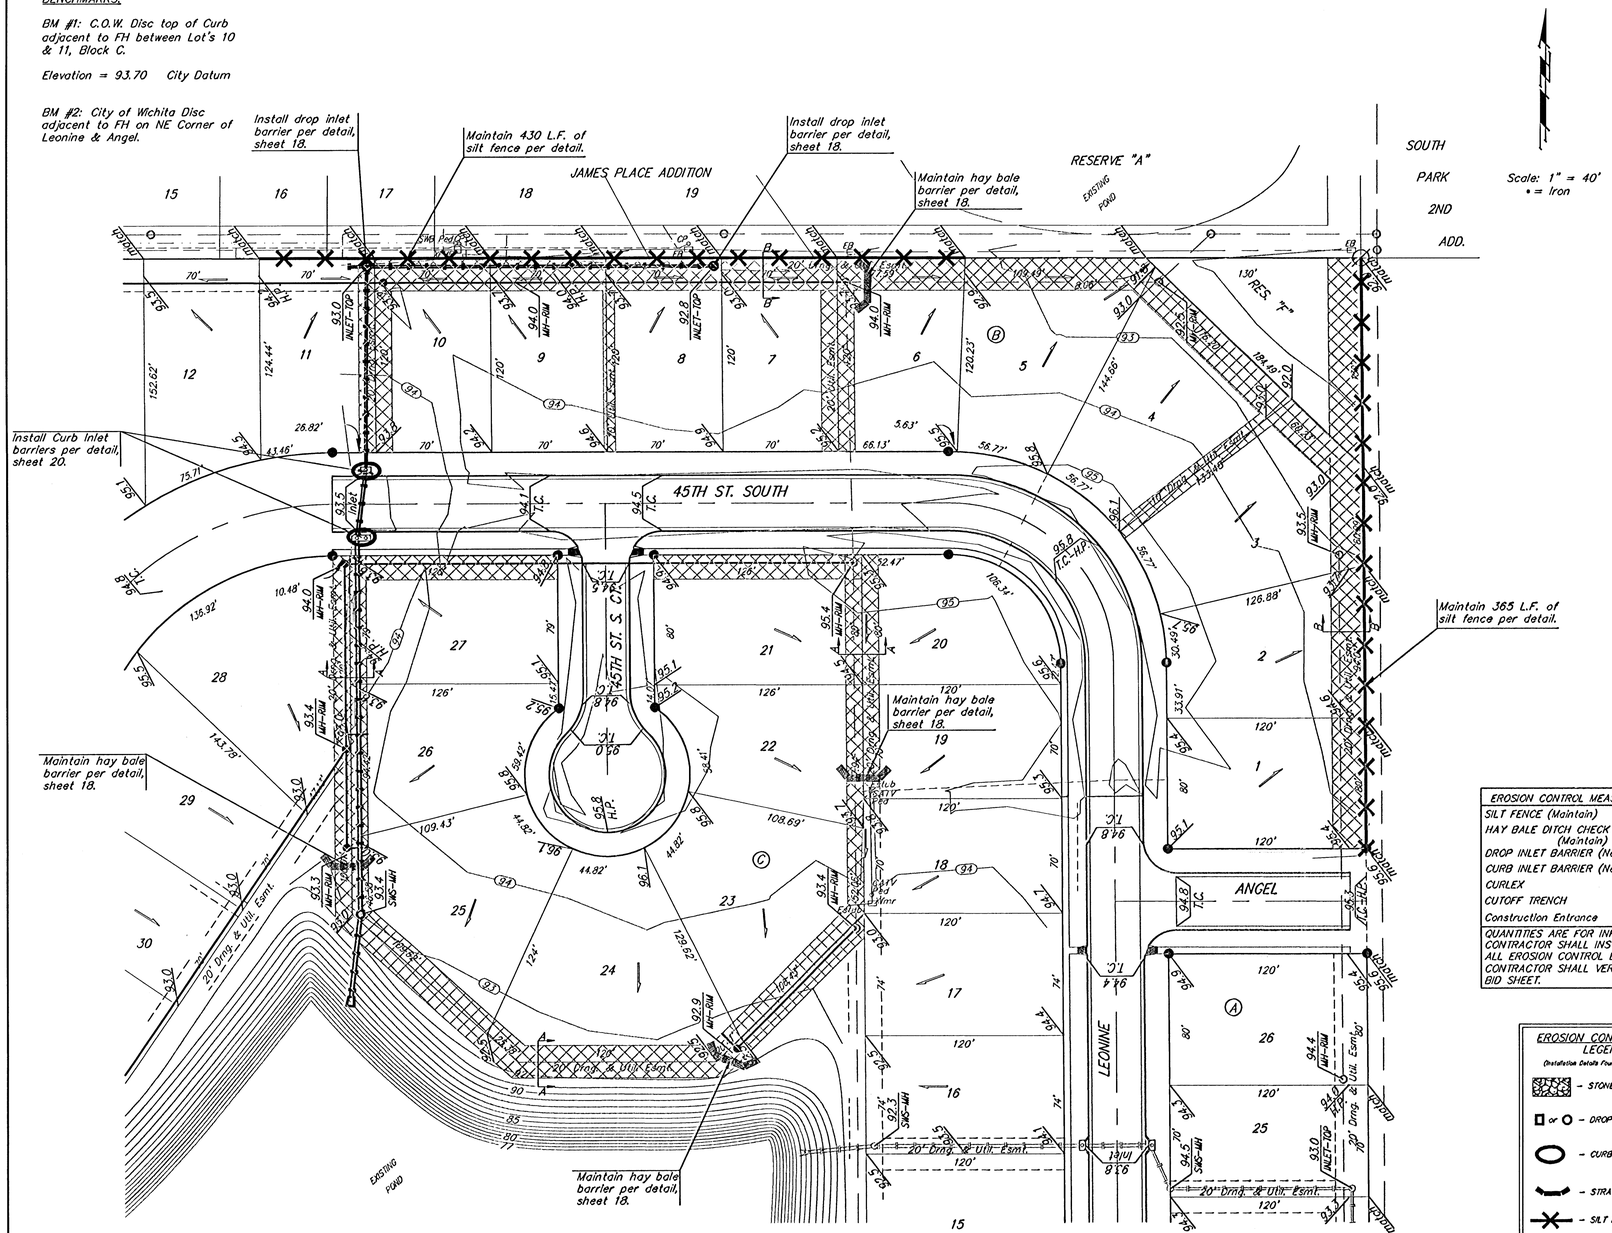




TYPICAL FILL SECTION




TYPICAL CUT SECTION

SECTION A–A



TYPICAL FILL SECTION



TYPICAL CUT SECTION

SECTION B–B

EROSION CONTROL MEASURE	UNITS	QUANTITY
SILT FENCE (Maintain)	L.F.	795
HAY BALE DITCH CHECK (Maintain)	S.Y.	4
DROP INLET BARRIER (New)	EA.	2
CURB INLET BARRIER (New)	EA.	2
CURLEX	S.Y.	0
CUTOFF TRENCH	L.F.	0
Construction Entrance	EA.	1

QUANTITIES ARE FOR INFORMATION ONLY! CONTRACTOR SHALL INSTALL AND/OR MAINTAIN ALL EROSION CONTROL BMP'S AS SHOWN. CONTRACTOR SHALL VERIFY QUANTITIES PER BID SHEET.

EROSION CONTROL PLAN LEGEND
(Installation Details Found in the SWPP Plan)

- STONE RIP-RAP
- ⊡ or ○ – DROP INLET PROTECTION
- ⬭ – CURB INLET PROTECTION
- STRAW BALE BARRIERS
- SILT FENCING
- EARTH DIKES

NO SCALE

= Easements To Be Graded

Approximate Easement Grading Quantities:
(For Information Only)
Excavation: 296 C.Y.
Fill: 247 C.Y.

The contractor shall grade the easements as shown to the elevations given on the easement grading plan. All costs for grading shall be incidental to the Easement Grading Bid Item.

The contractor shall 'straight' grade the easements between the elevations given. Where a callout designates 'Match', the contractor will grade to the existing ground elevation.

Baughman

ANGEL FIRE ADDITION - PHASE IV
ESMT. GRADING PLAN
WICHITA, KANSAS

Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316.262.7271 F 316.262.0149
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

PROJECT NUMBER	DESIGN	DRAWN
472-84126		TMS
REVISIONS	APPROVED	DATE 02/05
	SCALE Noted	
	SHEET 17 OF 24	

AngelFire/EsmtGrade 04-07-E968