


CONSTRUCT 4' SIDEWALK (AE) (4") AS INDICATED. WALK ELEV = TC + 0.3'

CONSTRUCT TYPE 1A INLET HOOKUP AND ADJUST TOP TO ELEV = 1345.76 (BOTH SIDES)

CONSTRUCT COMBINED ROLL TYPE CURB AND GUTTER (3 5/8") BOTH SIDES

STA 16+62, MICHELLE END TYPICAL 29' PAVEMENT SECTION INSTALL EOR MARKERS

CONSTRUCT 5" ASPHALT CONCRETE PAVEMENT W/ 5" CRUSHED ROCK BASE

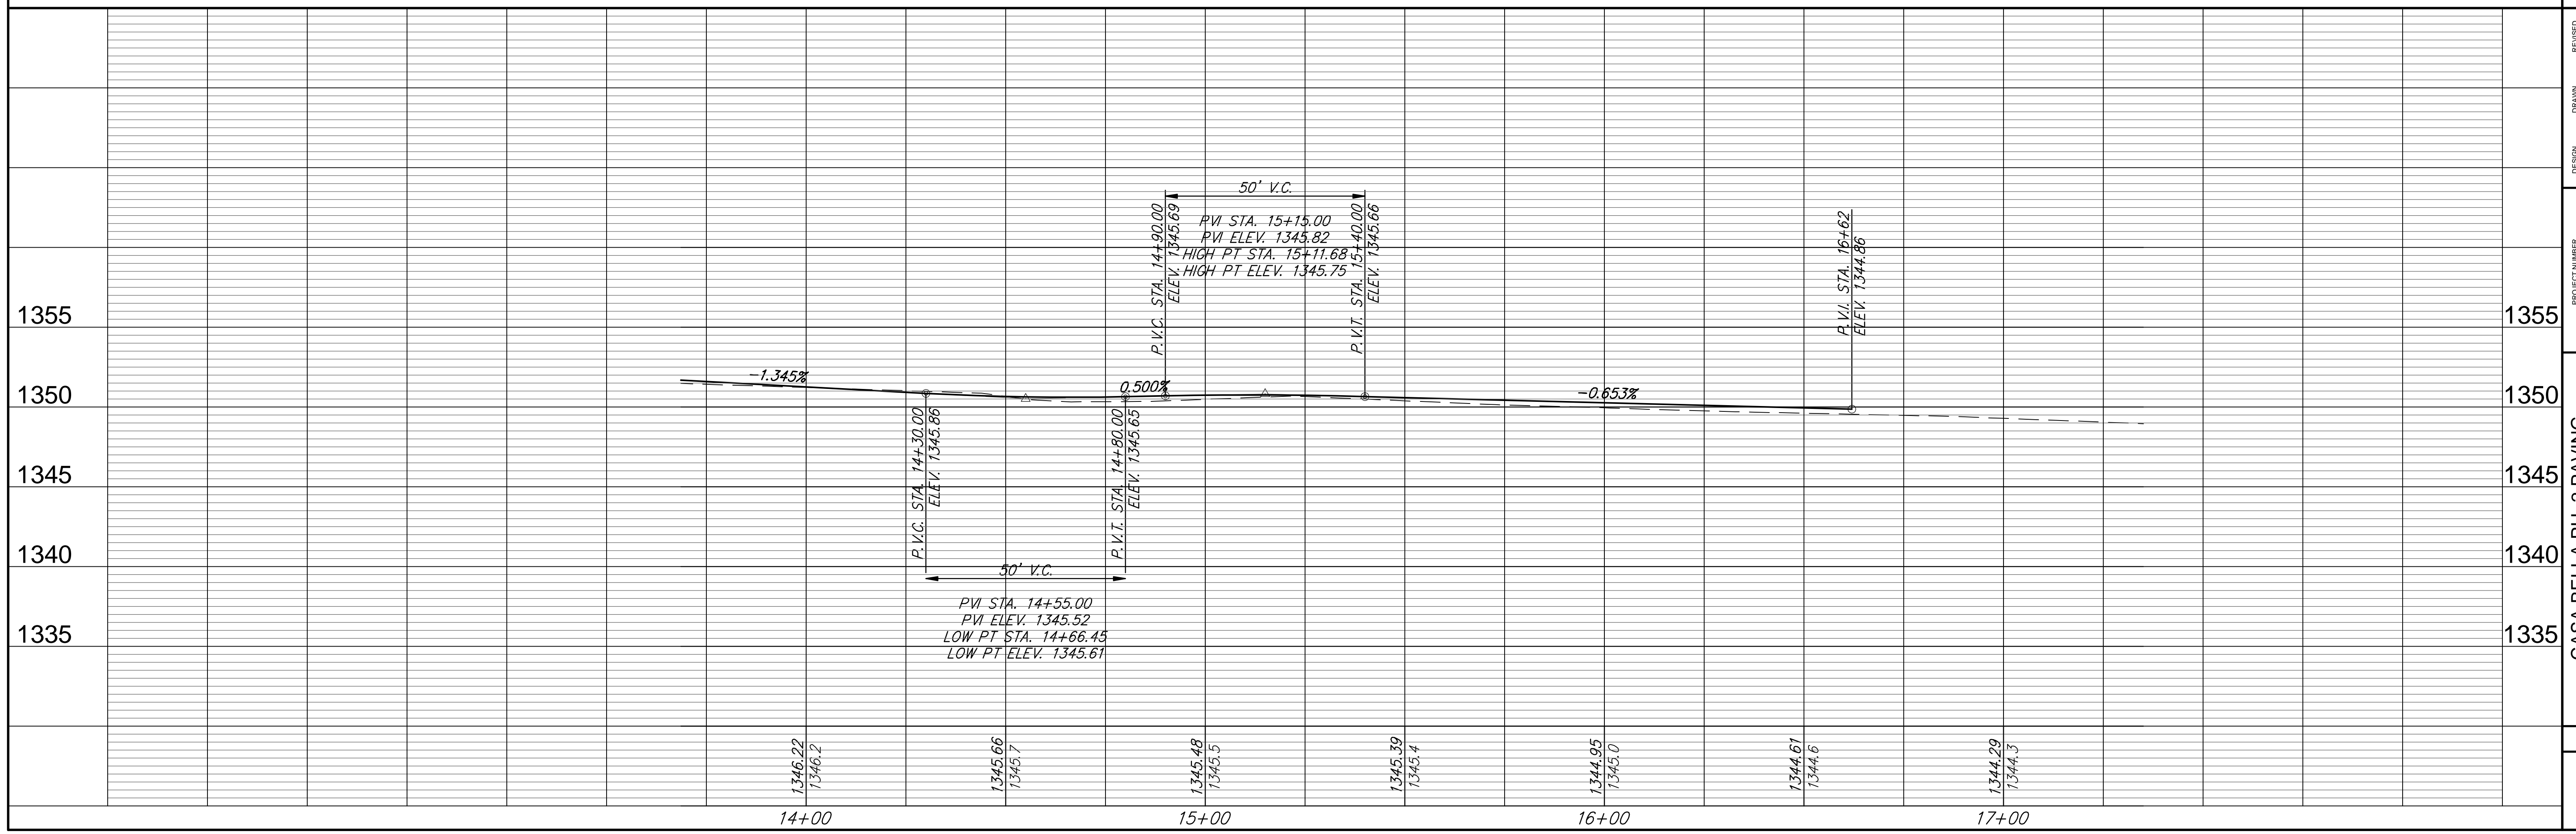

**CASA BELLA PH. 2 PAVING  
MICHELLE  
WICHITA KANSAS**

DESIGN KWIL UTILITY	DRAWN RA	REVISION RA	DATE Mar. 10, 2010
PROJECT NUMBER 472-84874	DRAWING FILE ENGINEERING BASE (Michelle (2))		
RB JOB 3564T	SHEET 7 OF 34		

Ruggles & Bohm, P.A.  
Engineering, Surveying, Land Planning  
202 West Main Street  
Wichita, Kansas 67202  
www.rugglesandbohm.com