
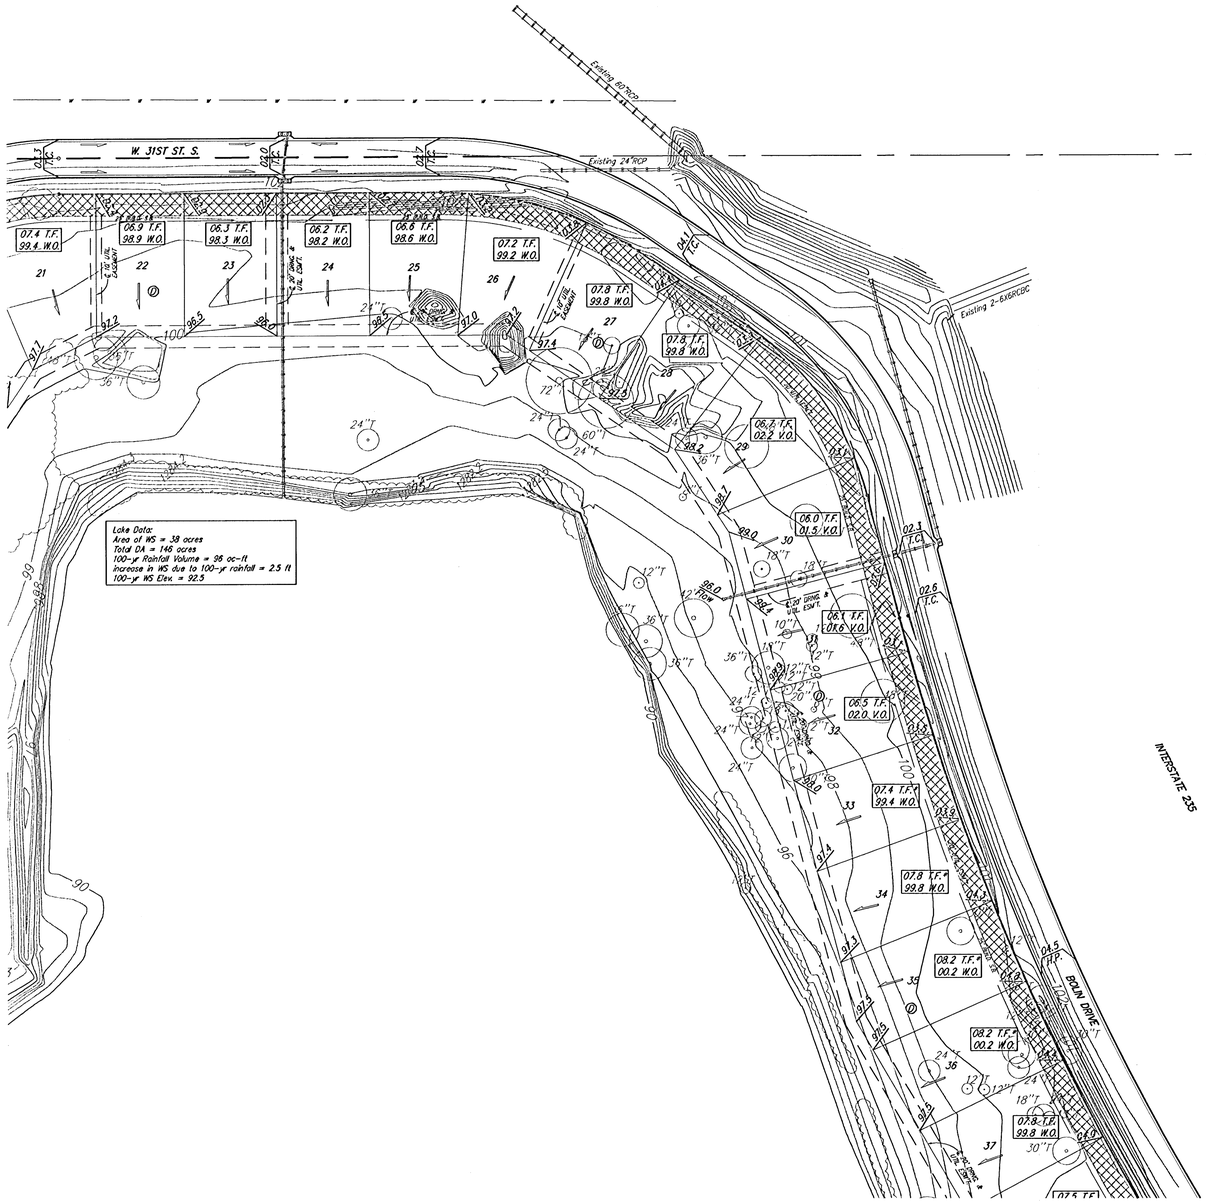



0 60 120

CONTOUR INTERVALS = 1 FOOT

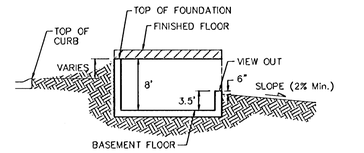


TYPICAL VIEW OUT DETAIL

NO SCALE

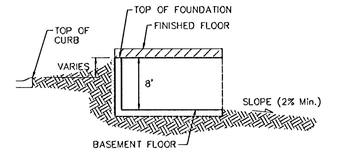


TYPICAL WALK OUT DETAIL

NO SCALE



TYPICAL FILL SECTION



TYPICAL CUT SECTION

= Easements To Be Graded

Approximate Easement Grading Quantities:
(For Information Only)
Excavation: _____ C.Y.
Fill: _____ C.Y.

The contractor shall grade the easements as shown to the elevations given on the easement grading plan. All costs for grading shall be incidental to the Easement Grading Bid Item.

The contractor shall 'straight' grade the easements between the elevations given. Where a callout designates 'Match', the contractor will grade to the existing ground elevation.

Benchmarks:
Hoover and MacArthur (39th St. South)
COW Bench Mark. NE corner of intersection.
41.60 ft North of center line.
69.00 ft East of center line.
20.00 ft East of guy pole.
79.80 ft NE of Section corner iron.

City 121.22 ft
MSL 1308.62 ft

Big Ditch and MacArthur
COW Bench Mark. West bound lane, east end of bridge.
East of Hoover.

City 116.52 ft
MSL 1303.92 ft

Baughman

BLUE LAKE ADDITION
ESMT GRADING
LATERAL 1, MAIN 22, S.W.I.

Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316.262.7271 F 316.262.0149
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

PROJECT NUMBER 468-83862

REVISIONS:

DESIGN DRAWN

APPROVED DATE 9/15/04

SCALE NOTED

SHEET 11 OF 22