PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
KA-1006-04	2010	63	71

ARRA Sign 4 ;
1.50" Radius, 0.50" Border, White on Blue;
[CITY NAME] C;
Table of distances between letter and object lefts.

	C	I	T	Y	N	A	M	E	
8.89	2.14	0.93	1.67	4.88	2.14	2.39	2.57	1.50	8.89

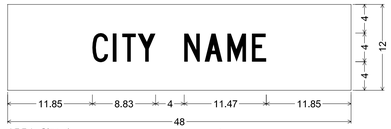

ARRA Sign 6 ;
1.50" Radius, 0.50" Border, White on Blue;
[CITY NAME] C;
Table of distances between letter and object lefts.

	C	I	T	Y	N	A	M	E	
11.85	2.86	1.24	2.23	6.50	2.86	3.18	3.43	2.00	11.85

TYPICAL SIGN INSTALLATION

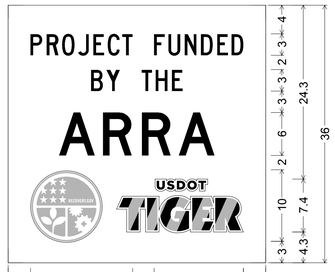

ARRA Sign 3
2.25" Radius, 0.75" Border, White on Green;
[PROJECT FUNDED] C; [BY THE] C;
[ARRA] D;
Table of distances between letter and object lefts.

	P	R	O	J	E	C	T	
3.12	2.28	2.14	2.25	2.13	2.00	1.98		

		F	U	N	D	E	D	
	4.50	2.01	2.27	2.28	2.27	2.00	1.65	3.12

	B	Y	T	H	E	
11.60	2.15	4.87	2.01	2.27	1.50	11.60

	A	R	R	A	
7.12	6.15	5.43	5.16	5.02	7.12

3.13	● Recovery 12.00	■ USDOT Tiger 17.73	3.14

NOTE: The height of the word "TIGER" in "USDOT Tiger" pictograph is 5".

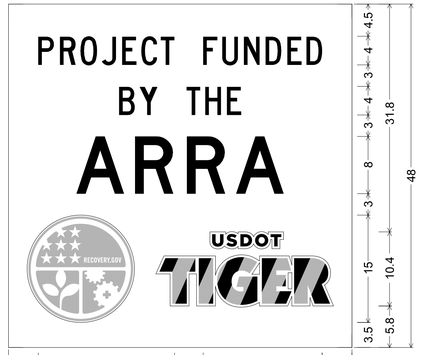

ARRA Sign 5
2.25" Radius, 0.75" Border, White on Green;
[PROJECT FUNDED] C; [BY THE] C; [ARRA] D;
Table of distances between letter and object lefts.

	P	R	O	J	E	C	T	
4.17	3.03	2.86	2.99	2.84	2.67	2.65		

		F	U	N	D	E	D	
	6.00	2.67	3.03	3.03	3.03	2.68	2.18	4.17

	B	Y	T	H	E	
15.47	2.86	6.50	2.67	3.03	2.00	15.47

	A	R	R	A	
9.50	8.19	7.25	6.87	6.69	9.50

2.60	● Recovery 18.00	■ USDOT Tiger 24.8	2.6

NOTE: The height of the word "TIGER" in "USDOT Tiger" pictograph is 7".

GENERAL NOTES

The "ARRA" sign blank material shall be aluminum, wood, or fiberglass reinforced plastic.

The "ARRA" sign faces shall be covered with Type IV high intensity retroreflective sheeting.

The "ARRA" signs are to be mounted on one (1) 4"x6" wood post for the 36" wide signs and two (2) 4"x6" wood posts for the 48" wide signs. The post installation is to be as shown on TE712 without the use of bracing, guy wires, or tie-downs. The "ARRA" signs may also be mounted on skids. The mounting heights and lateral offsets are to be as shown on TE714.

The "ARRA" signs are to be installed in advance of the first traffic control sign a distance of 500' for a two-way roadway in a rural location and 100' to 350' in an urban area depending upon the speed. The first traffic control sign is either the "Road Work Ahead" or the "Give 'Em A Brake" sign. The Engineer may designate a more appropriate location if conditions dictate.

The "ARRA" signs are not to interfere with the traffic control signs for the project or with any other regulatory, warning, or guide sign that is to remain in place during construction.

The details for the "Recovery" and "USDOT Tiger" pictographs are available at www.fhwa.dot.gov/economicrecovery/arrasigndetail.pdf.

NO.	DATE	REVISIONS	BY	APP'D
3				
2				
1				

KANSAS DEPARTMENT OF TRANSPORTATION

DETAILS FOR THE AMERICAN RECOVERY AND REINVESTMENT ACT (ARRA) SIGNS (LOCAL PROJECTS)

FHWA APPROVAL		APP'D	
DESIGNED	DETAILED	QUANTITIES	TRACED
DESIGN CK.	DETAIL CK.	QUAN. CK.	TRACE CK.

HNTB
ENGINEERS ARCHITECTS PLANNERS

Plotted on: Friday February 26, 2010 9:10
kschomaker Plot Queue: \\CBSW00\KC038933-PS
Plot Scale: 0.083334' Pen Tables: 5037_half.pen
Design Filenames: \\kcow00\Jobs\5037\Roadway\CD\TrafficControlDetails\ARRA_Sign.dgn

\\kcow00\Jobs\5037\Roadway\CD\TrafficControlDetails\ARRA_Sign.dgn