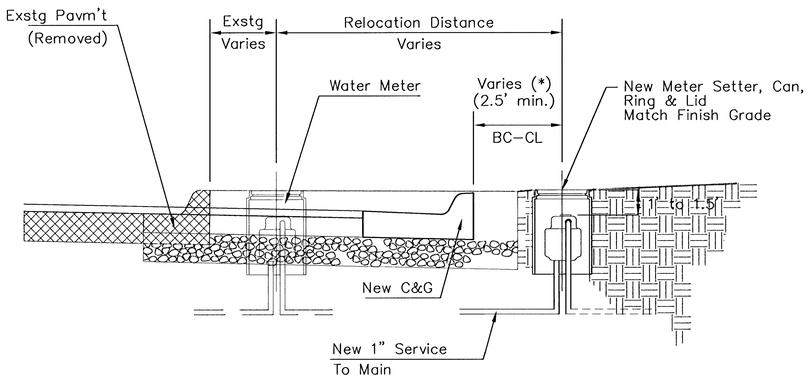

WATER METER RELOCATION DETAIL

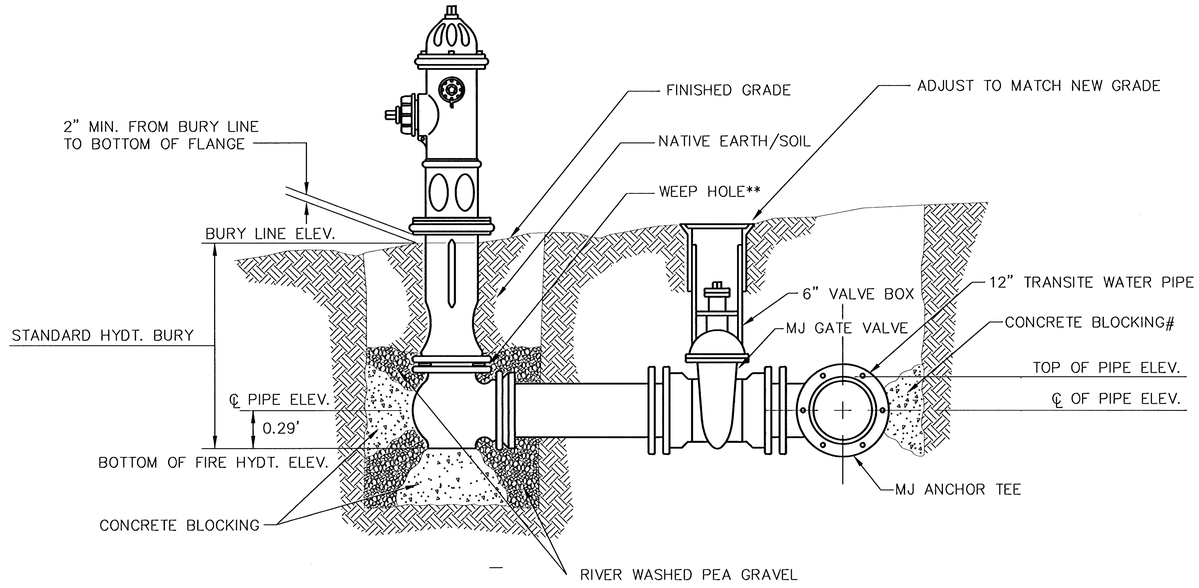

FIRE HYDRANT BLOCKING DETAIL

(*) Relocation of all water meters in conflict with construction of this project will be accomplished in conjunction with construction. Location of meter(s) will be typically set at least 2.5' from the back of new curbline to the centerline of meter box unless otherwise as directed by the Field Engineer.

The top of the meter box to be field set typically to match finish grade elevations unless otherwise directed by the Field Engineer.

Replace meter setter, can, ring & lid. Existing 3/4" Copper Setter may be reinstalled upon Engineer's Approval or replaced with 1" Copper Setter. All work and materials required is to be INCIDENTAL to the quantity item "Water Meter Relocation (EA.)"

Ex. Water Meters To Be Abandoned Shall Be INCIDENTAL to the Bid Item "Site Restoration".

** CAUTION! WEEP HOLES TO BE KEPT CLEAR DURING CONSTRUCTION AND BACKFILL. CONCRETE FOR THRUST BLOCKING SHALL NOT OBSTRUCT WEEP HOLES.

CONCRETE THRUST BLOCKING SHALL BE KEPT CLEAR OF BOLTS, NUTS, AND MJ ACCESSORIES.

* IF HYDRANT BURY IS IN EXCESS OF 5', CONTRACTOR SHALL USE STANDARD 5' HYDRANT BURY AND HYDRANT BARREL EXTENSIONS AS NECESSARY.

WATER METER ADJUSTMENT TABLE

B.L. Sta.	*Ex. Offset*	*New Offset*	*Status*	*Elevation*
42+06.60	*30.5' Rt.*	*--*	*ABANDONED*	
42+20.64	*30.2' Rt.*	*35.2' Rt.*	*RELOCATED*	*159.54*

PROJECT NUMBER			SHEET NAME	ENGINEERING DIRECTORY	
472 - 83370			wtrdet	Kelog_gr\greenwich\details	
DESIGN	DRAWN	APPROVED	DATE	SCALE	BAUGHMAN NO
JFB	TD	JFB	June 2001	1:20	01 06 E045

ONE KELLOGG PLACE 2ND ADDN
Water Details
GREENWICH ROAD FROM GILBERT TO KELLOGG AVE

BAUGHMAN COMPANY, P.A.
ENGINEERING, SURVEYING, & PLANNING
316-262-7271 • 315 ELLIS • WICHITA, KANSAS 67211

SHEET 16 OF 43

F:\Eng\KELLOG_GR\greenwich\details\wtrdet.dwg Mon Jul 16 20:38:53 2001