

J.B. MULLER ADDITION

NE 1/4, SEC. 29, T26S, R1E

4422 N. Arkansas Ave.

CONSTRUCT DOUBLE WYE CLEANOUT WITH RISERS AS PER THE SEWER SERVICE TABLE. SEE SHEET NO. 13

MH 12-3
STA. 3+85.91 LINE 12
SEE SHEET NO. 2

MH 12-4
STA. 4+36.19 LINE 12
N 19831.80
E 20249.37
CONSTRUCT STD TYPE P MH
TOP = 1322.77
8" STUB (N) = 1312.07

MH 12-5
STA. 6+36.35 LINE 12
N 19831.80
E 20049.22
CONSTRUCT STD TYPE P MH
TOP = 1321.93

N 19730.02
E 20039.57


N 19798.76
E 20039.72

MH 12-6
STA. 7+79.90 LINE 12
N 19728.32
E 19949.73
CONSTRUCT STD TYPE P MH
TOP = 1322.72
8" STUB (N & S) = 1313.30


STA 6+47.92 TO STA 7+59.92 LINE 12
THE CONTRACTOR SHALL INSTALL 112 LIN. FT. OF 18" CASING PIPE BY BORING AND JACKING

EARHART ELEMENTARY SCHOOL
4401 ARKANSAS AVE
CONTACT:
JOE HOOVER AT 973-2239


PRIVATE PROPERTY:
4451 ARKANSAS AVE.
TRACT NO. A-296-UP

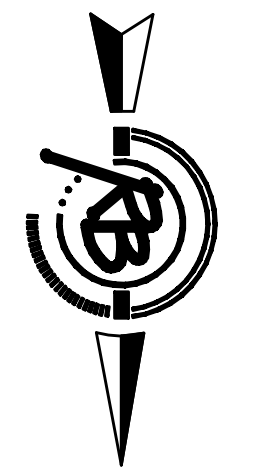

Scale 1" = 20' (Horiz.)
1" = 5' (Vert.)

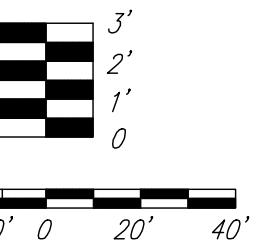

REVISED: 6/27/07

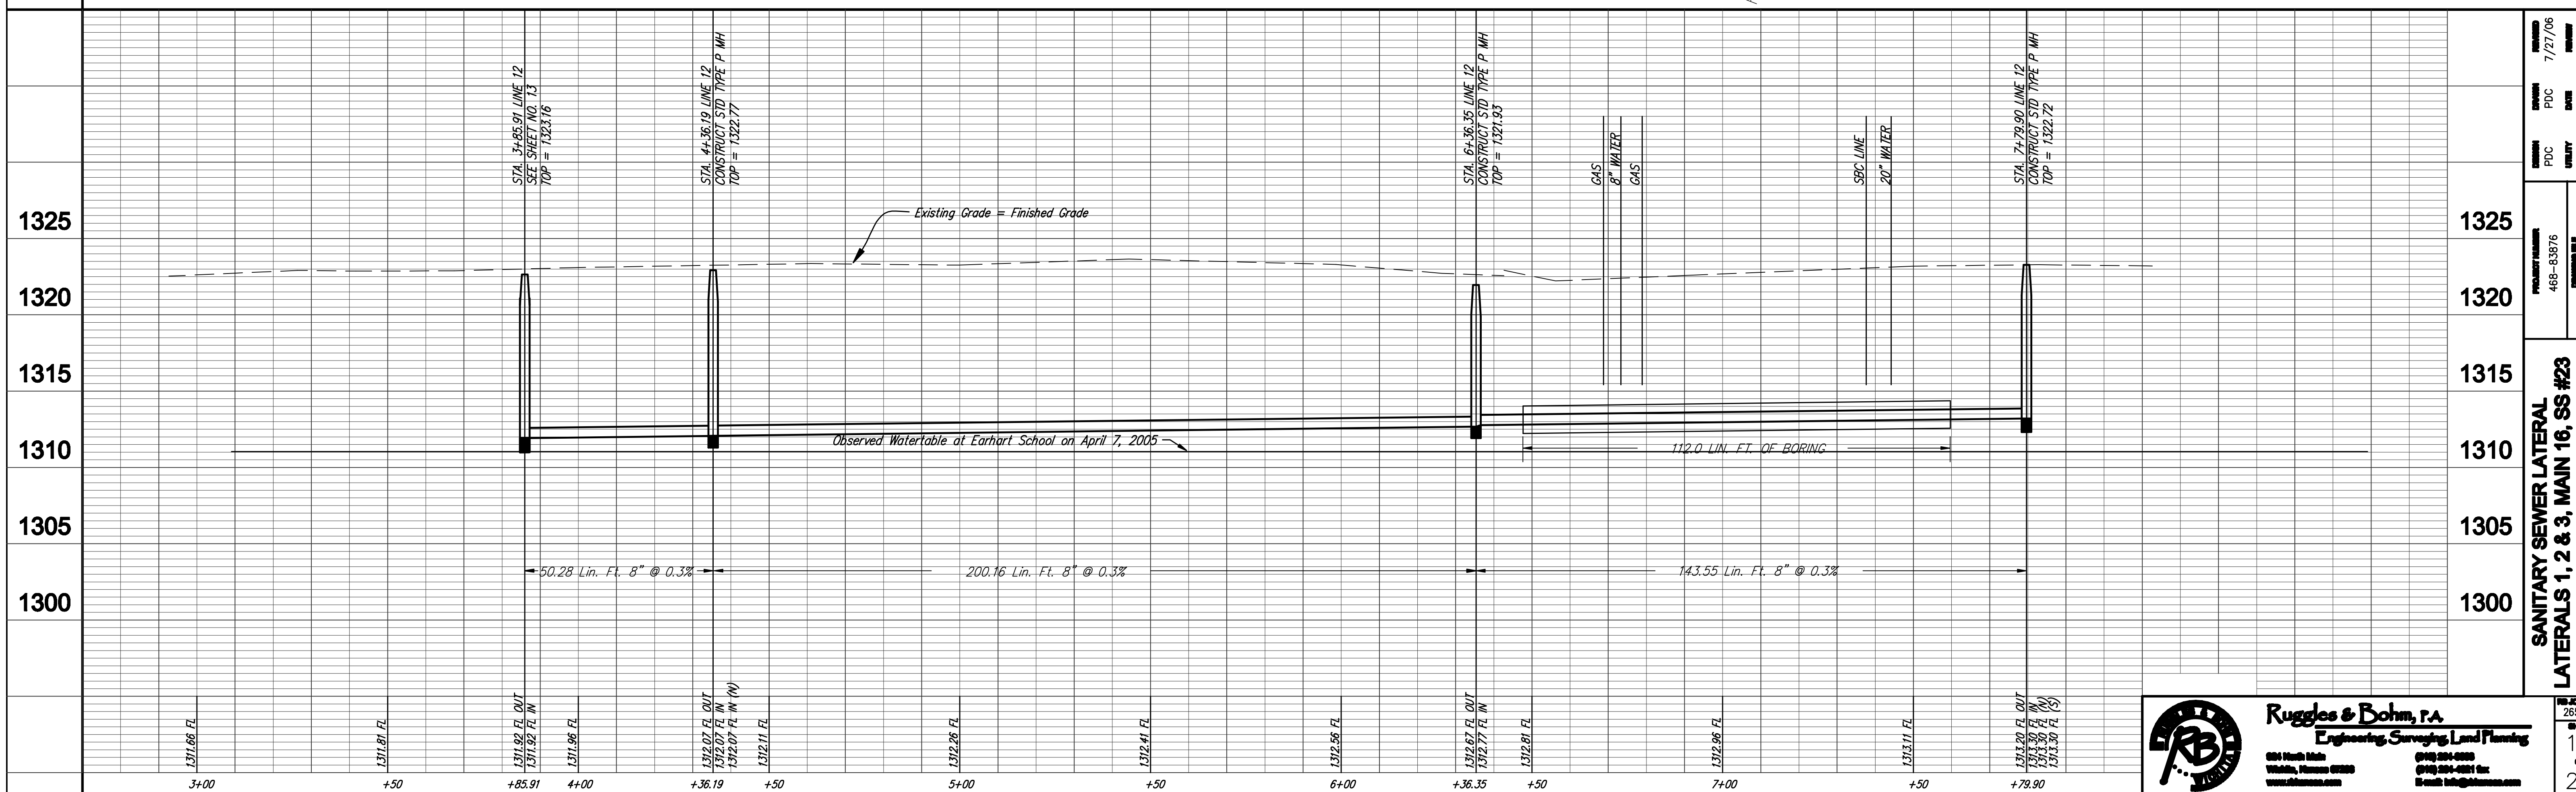

PROJECT NUMBER: 468-B3976
DATE: 4/5/05
7/27/06
PDC: PDC
PDC: PDC
UTILITY: UTILITY
engg base.dwg
SANITARY SEWER LATERAL
LATERALS 1, 2 & 3, MAIN 16, SS #23
LINE 12

Ruggles & Bohm, P.A.
Engineering, Surveying, Land Planning
2652X
14
25