


3.11' x 80.73 G.E. Cor Concrete Step Nos. 411 R/L and or 198' Has. N. of
Tanglewood, N.E. R/L and.

Scale 1" = 80'


CURVE DATA BASED ON W.B.R. 3500' Δ = 15°

Station	Arc	Chord Length 8' @ 11' curb	Chord Length 8' @ 11' curb	Deflection	Total Deflection
01.31	19.0'	16.62	16.13	0° 00' 00"	0° 00' 00"
+30	25.0'	24.46	21.18	1° 33' 30"	1° 33' 30"
+75	25.0'	24.46	21.18	2° 02' 48"	3° 36' 03"
+100	25.0'	24.46	21.18	2° 02' 48"	5° 38' 56"
+125.63	32.63'	32.12	19.19	1° 51' 04"	7° 30' 00"

4911' mins. per ft. of deflection.

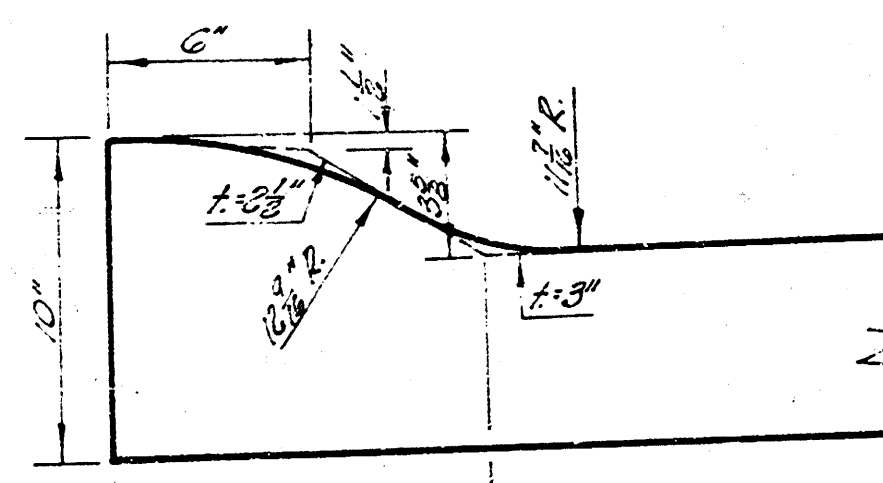

ROLL CURB DETAIL

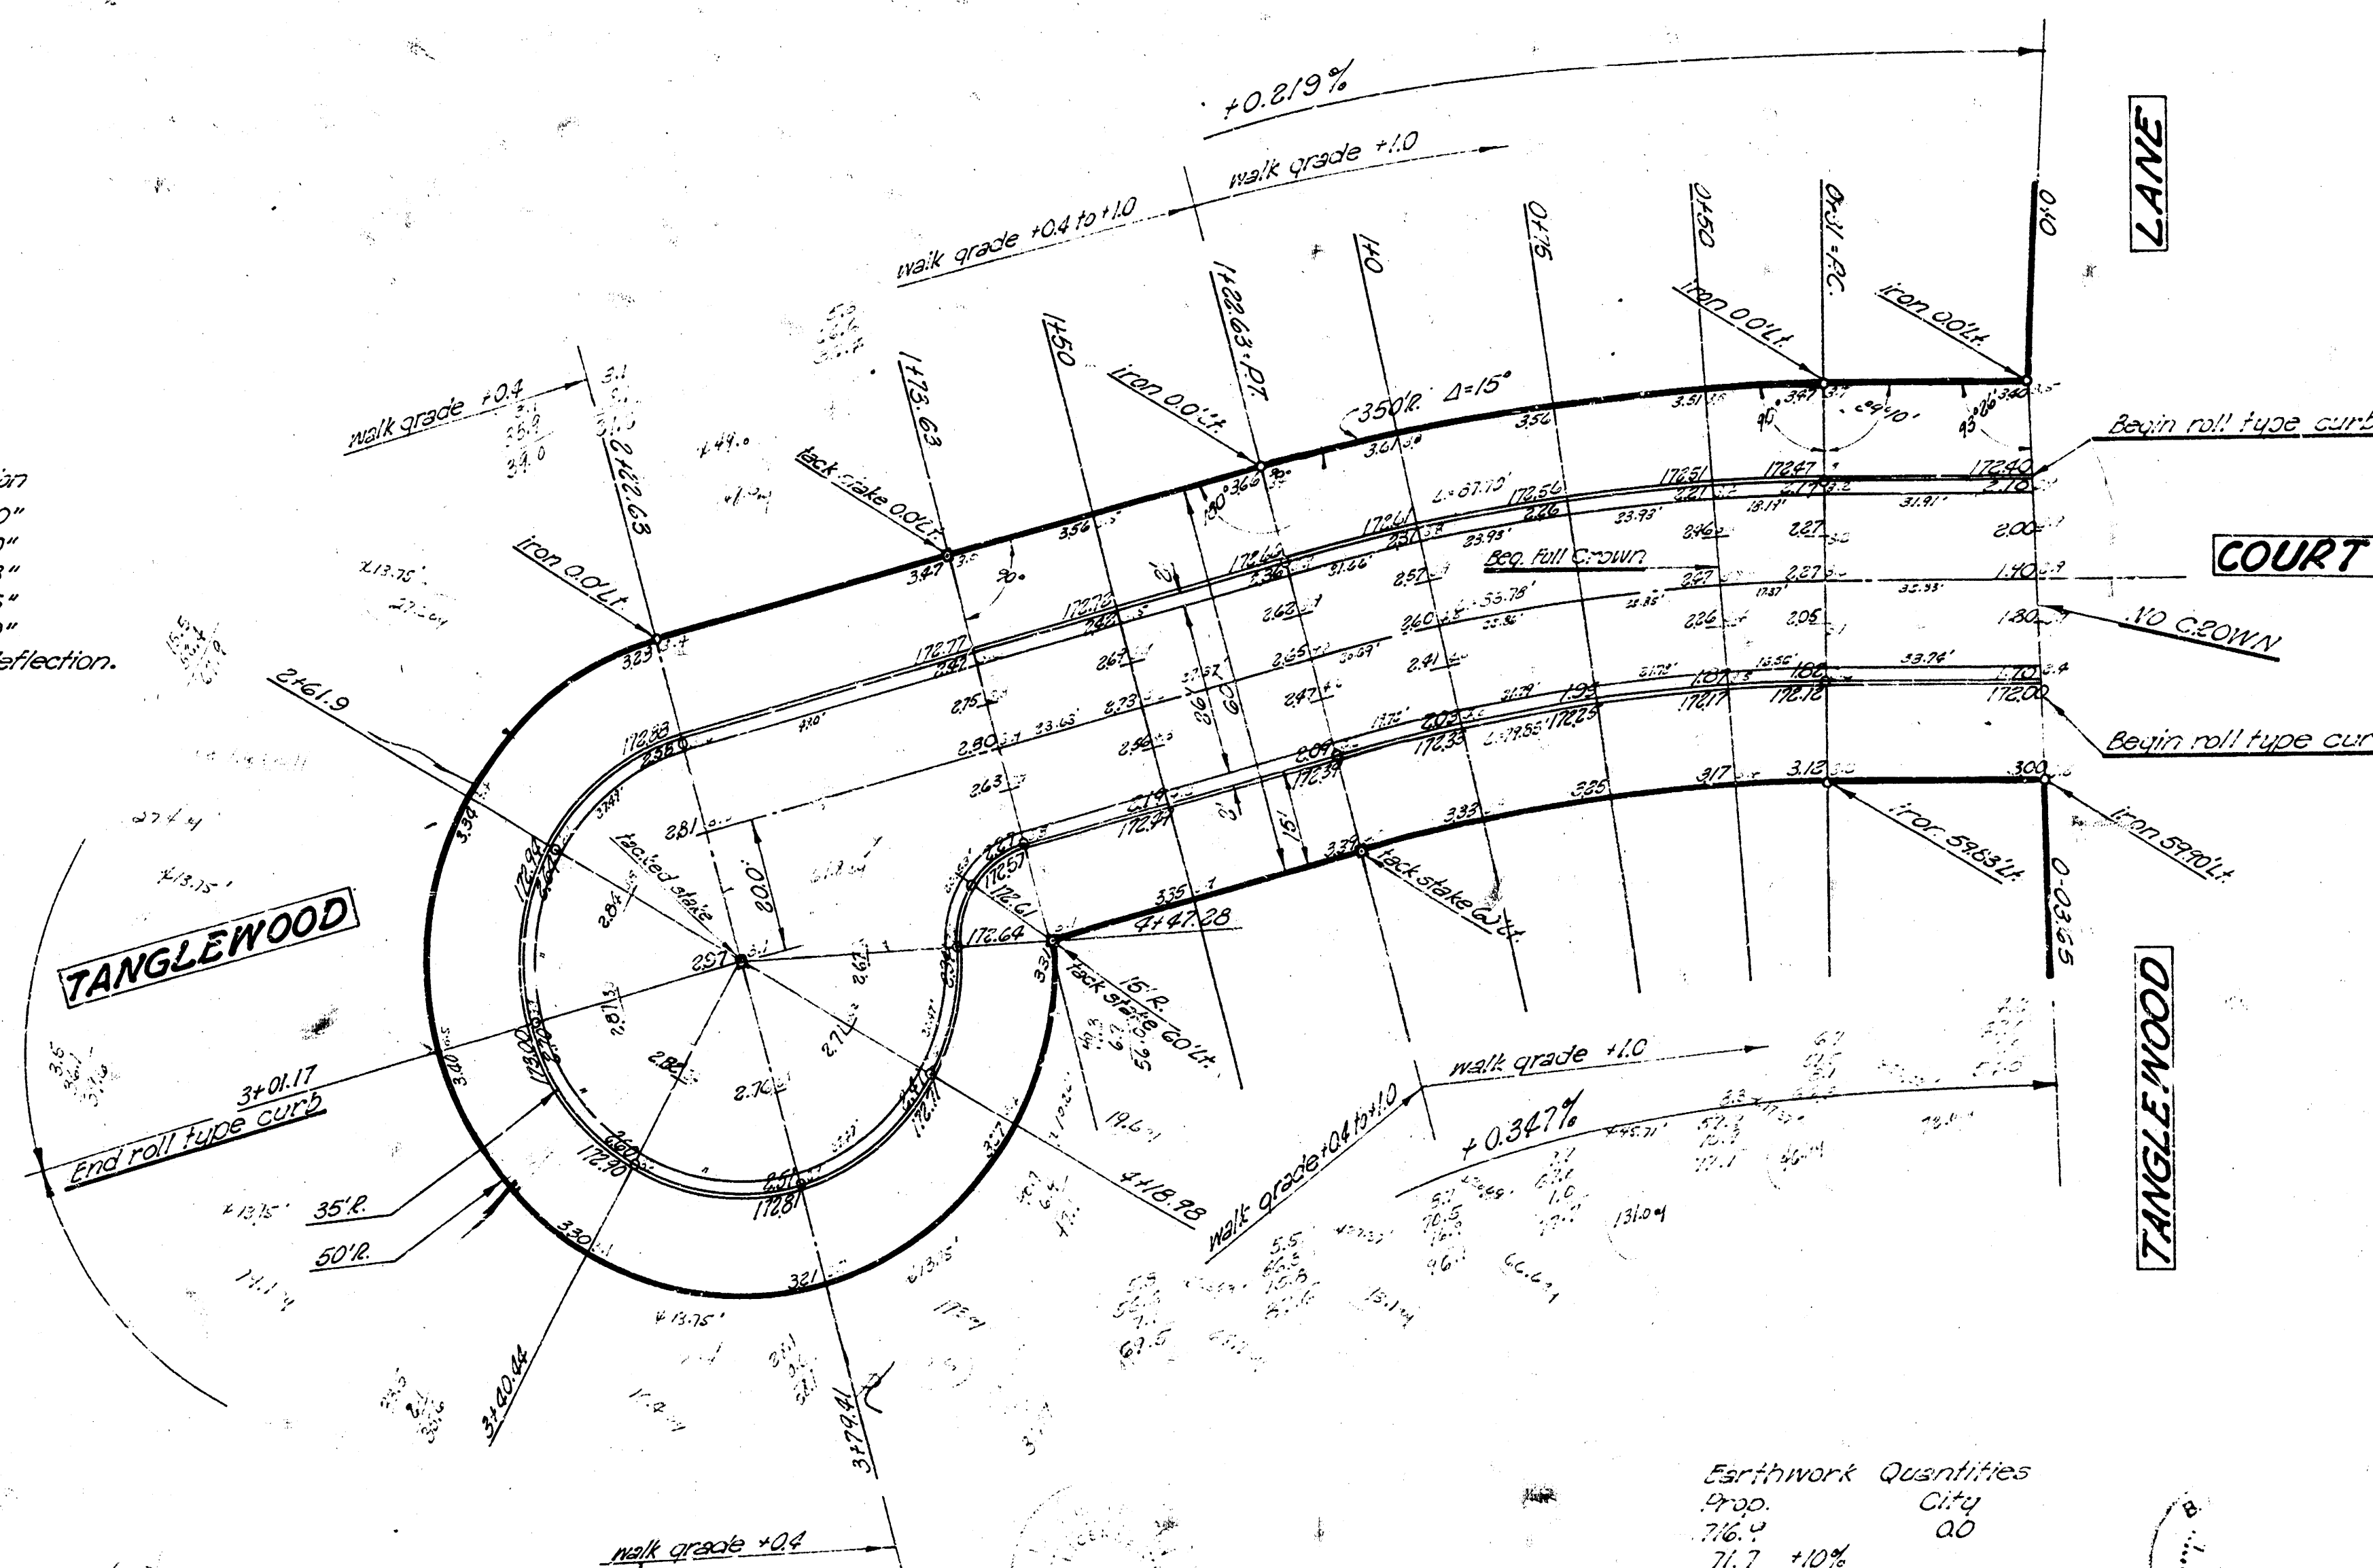

Earthwork Quantities
Prop. City
76.4 0.0
76.7 +10%
785.6 Cu Yds.

TANGLEWOOD COURT

5.L. Tanglewood Lane to and incl. Cul-De-Sac.

26'-8 1/2' - 30' Asphaltic Concrete Pavement

City of Wichita, Kansas

B.E. Smith City Engineer

Date - JULY 1963 Proj. No. C-18-85