


3.11' x 80.73 G.E. Cor Concrete Step Nos. 411 R/L and or 198' Has. N. of  
Tanglewood, N.E. R/L and.

Scale 1" = 80'


# CURVE DATA BASED ON W.B.R. 3500' Δ = 15°

| Station | Arc    | Chord Length<br>8' @ 11' curb | Chord Length<br>8' @ 11' curb | Deflection | Total<br>Deflection |
|---------|--------|-------------------------------|-------------------------------|------------|---------------------|
| 01.31   | 19.0'  | 16.62                         | 16.13                         | 0° 00' 00" | 0° 00' 00"          |
| +30     | 25.0'  | 24.46                         | 21.18                         | 1° 33' 30" | 1° 33' 30"          |
| +75     | 25.0'  | 24.46                         | 21.18                         | 2° 02' 48" | 3° 36' 03"          |
| +100    | 25.0'  | 24.46                         | 21.18                         | 2° 02' 48" | 5° 38' 56"          |
| +125.63 | 32.63' | 32.12                         | 19.19                         | 1° 51' 04" | 7° 30' 00"          |

4911' min. per ft. of deflection.

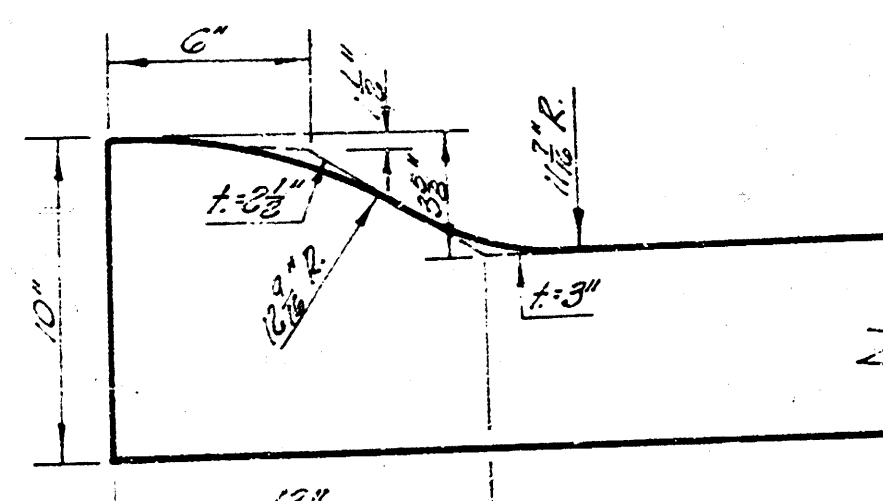

ROLL CURB DETAIL

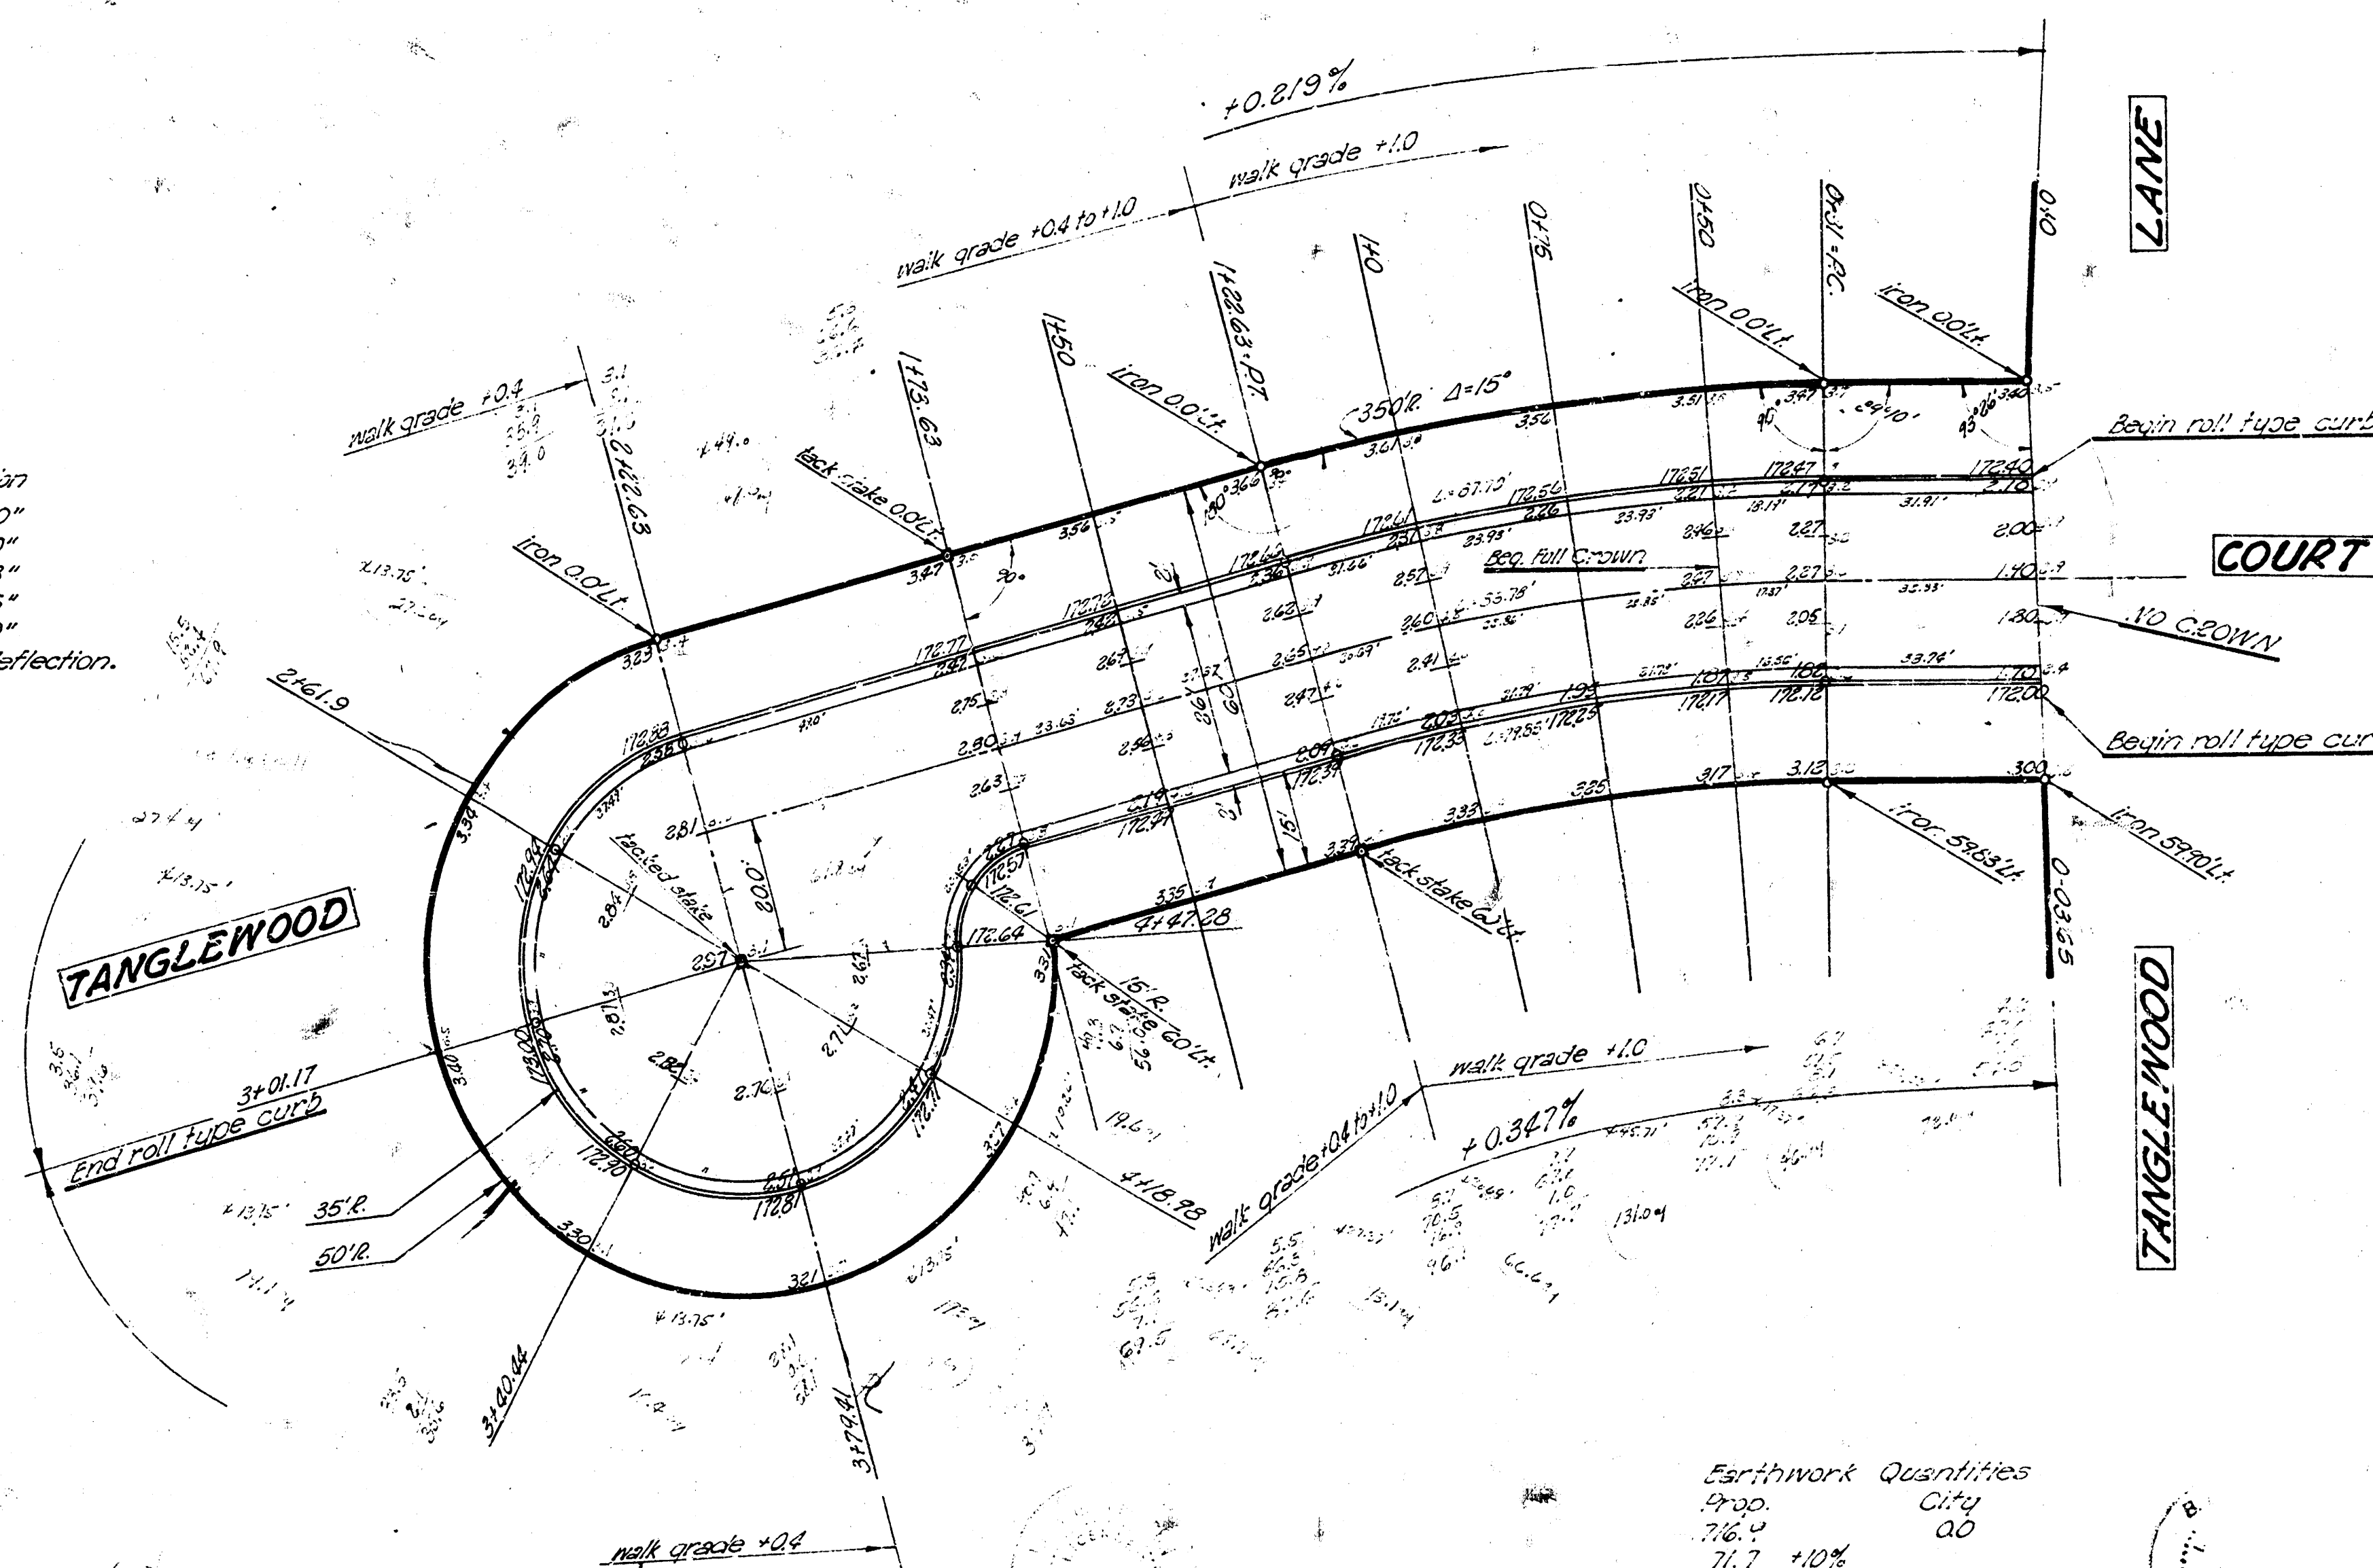

Earthwork Quantities  
Prop. City  
76.4 0.0  
76.7 +10%  
785.6 Cu Yds.

## TANGLEWOOD COURT

5.1. Tanglewood Lane to and incl. Cul-De-Sac.

26'-8" - 30' Asphaltic Concrete Pavement

City of Wichita, Kansas

B.E. Smith City Engineer

Date - JULY 1963 Proj. No. C-18-85