
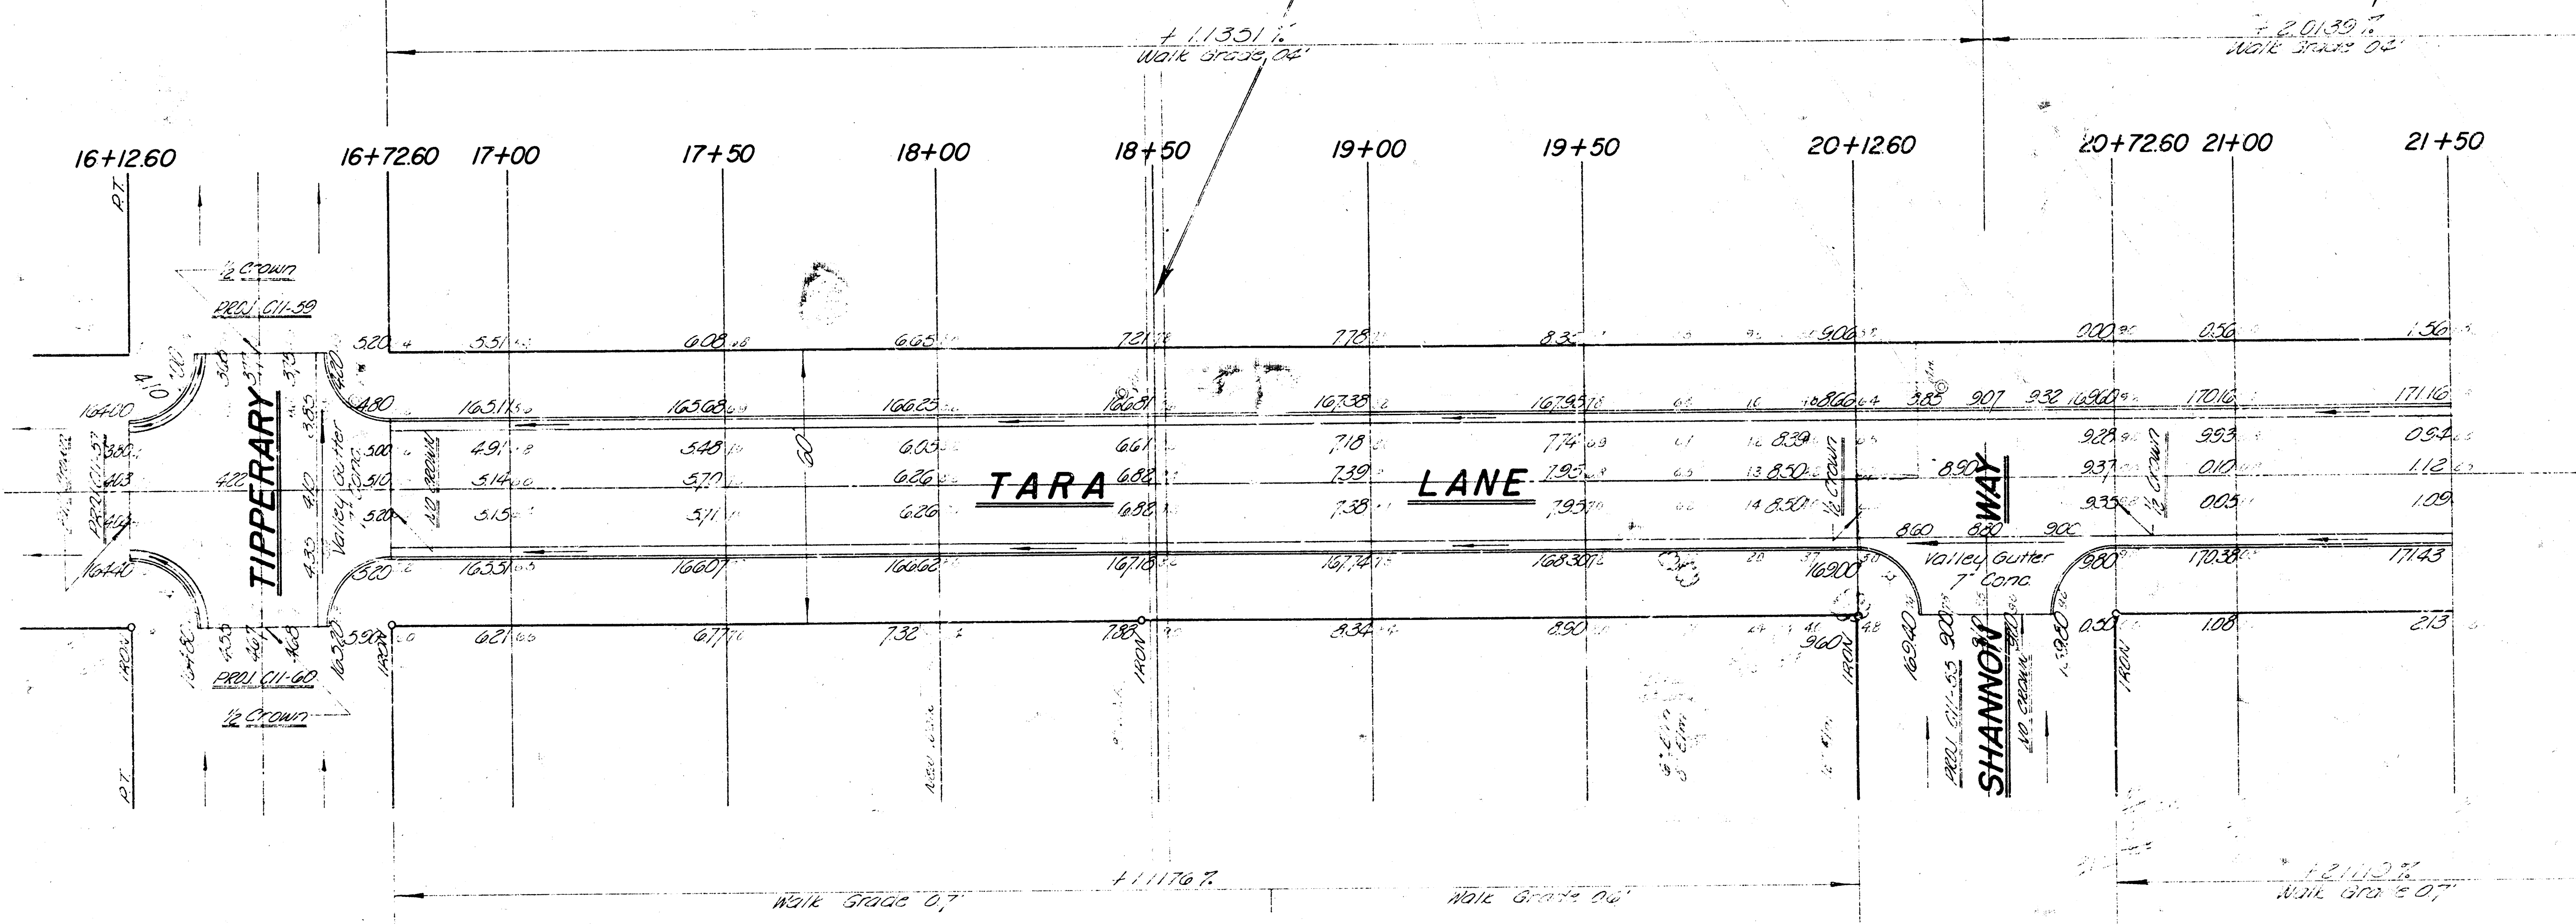


BASELINE TO E. PROPERTY LINE


Note
Use extreme "CAUTION" when
working over K.G. & E. & Bell Conduits.

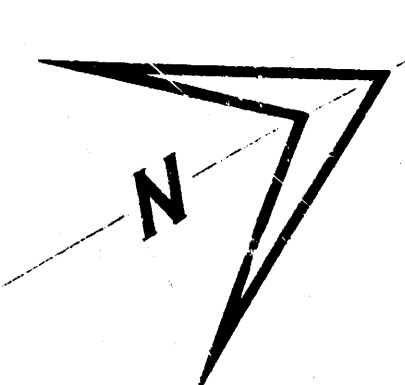

EXCAVATION		COMP. FILL	
1720	156.7	327.5	15.4
1720	157	32.5	1.5
1891.9	172.4	340.3	16.9

TARA LANE
S.L. TIPPERARY TO W.L. LOT 5
26'-2'-30' A.C.
CITY OF WICHITA, KANSAS
B.E. SMITH CITY ENGINEER
DATE: APRIL 1962 PROJ. C11-58

PROJ. BY E. J. JONES

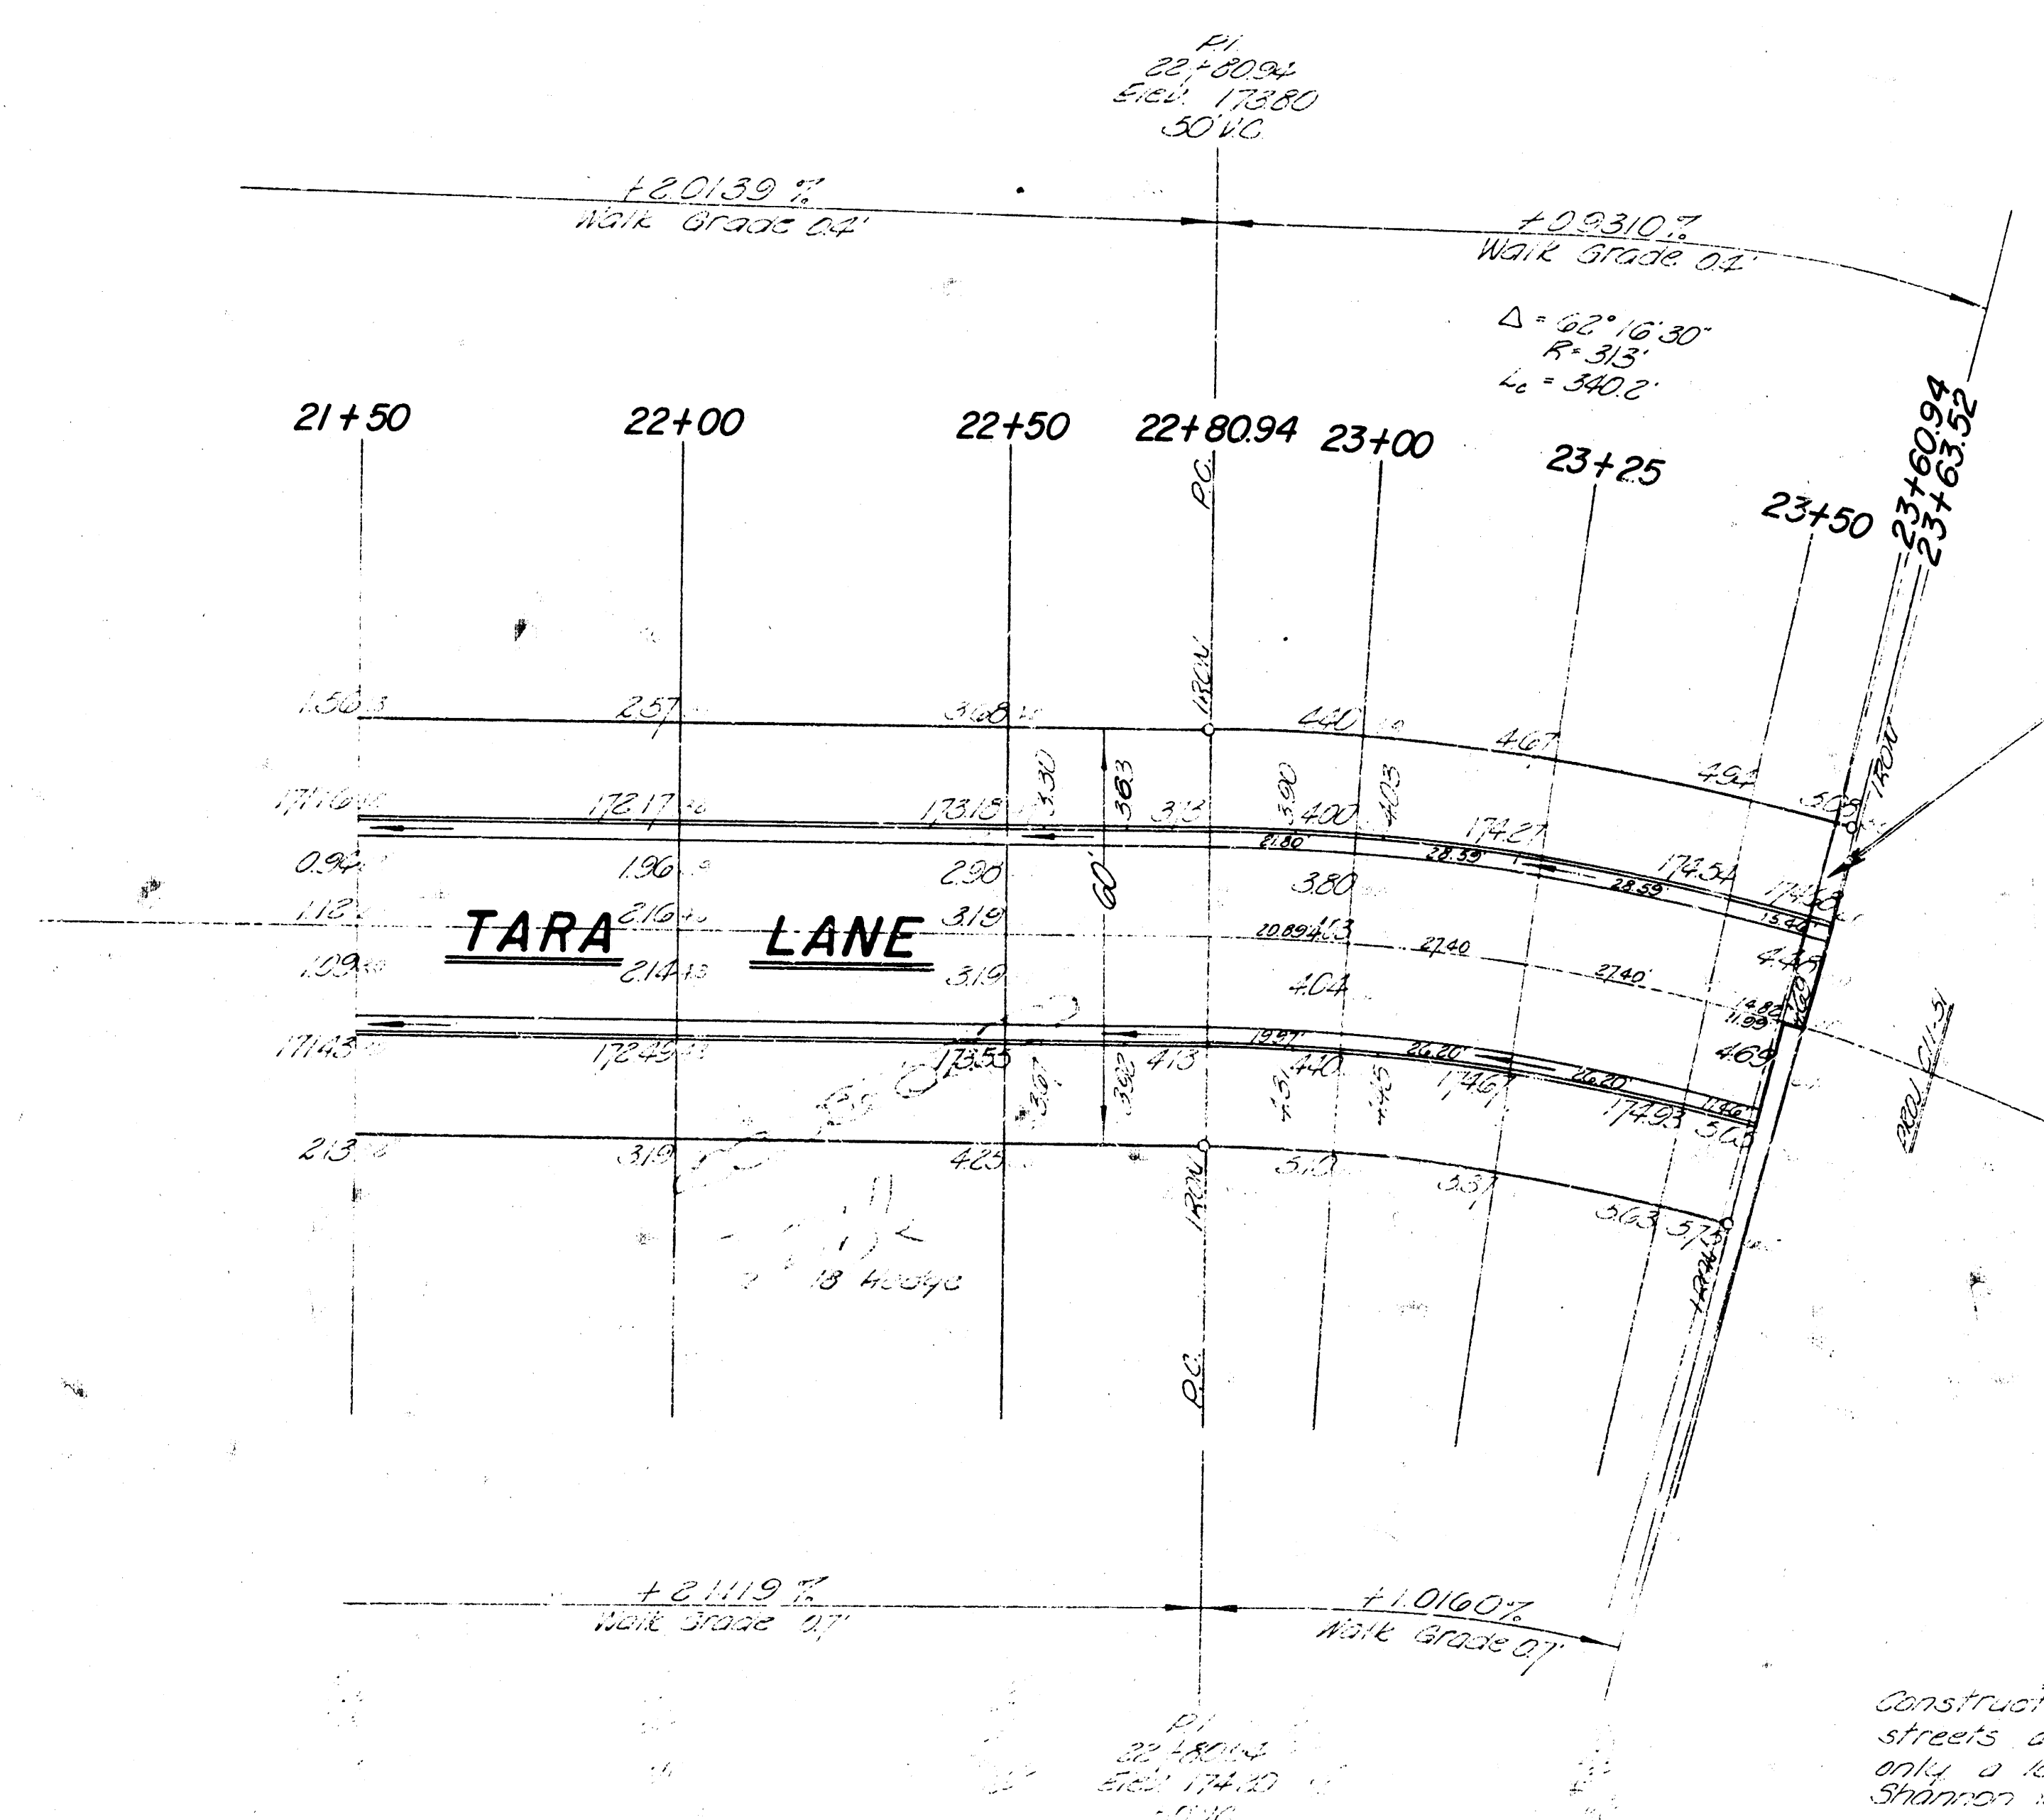

Note
Use extreme **CAUTION** when
working over K&E & Bell Conduits

CURVE DATA					
Radius & S. B. = 310.30' Length = 340.30' Min. per ft. = 3.4946					
Sta	ARC	Chords		Defl.	± Defl.
		3 E	8 1/2 S	8 1/2 W	
22+80.94					
23+00	19.08	19.08	19.25	22.22	1° 41' 40"
23+25	23.00	24.89	25.55	29.22	4° 01' 57"
23+50					6° 19' 15"
23+75					9° 36' 34"
24+00					12° 53' 49"
24+25					16° 11' 07"
24+50					19° 28' 26"
24+75					22° 45' 47"
25+00					26° 02' 59"
25+25					29° 20' 18"
25+50					32° 37' 32"
25+75					35° 54' 51"
26+00	23.00	24.89	25.55	29.22	2° 17' 12"
26+25	21.14	21.14	21.61	25.70	1° 36' 05"

INTERSECTION NOTE:
Construct intersections as shown unless cross
streets are being paved at same time. Use
only a 10' valley gutter section (T'one) if
Shannon is paved at same time as this project.