



SUMMARY OF PAVEMENT MARKINGS

LOCATION	4" Broken White Lane Line (ft)	6" Solid White Lane Line (ft)	12" White Chevron (ft)	12" Solid White Crosswalk Line (ft)	12" White Diagonal Line (ft)	24" Solid White Type II Crosswalk Line (ft)	24" Solid White Stop Line (ft)	4" Broken Yellow Line (ft)	4" Solid Yellow Edge Line (ft)	4" Solid Yellow Double Line (ft)	12" Solid Yellow Diagonal Line (ft)	Left Turn Arrows (each)	Right Turn Arrows (each)	"ONLY" Symbol (each)
Sta. 33+00 to Sta. 57+00	500	912	138				42		695	919	91	10		
Sta. 57+00 to Sta. 81+00	1150	1762	506						4499			23	1	1
Sta. 81+00 to Sta. 105+00	1550	1871				592	248		3899	364	76	29	2	1
Sta. 105+00 to Sta. 129+00	1890	734		112					4495			12		
Sta. 129+00 to Sta. 153+00	370	789			126			240	1571		107	6		
Totals	5460	6068	644	112	126	592	290	240	15159	1283	274	80	3	2

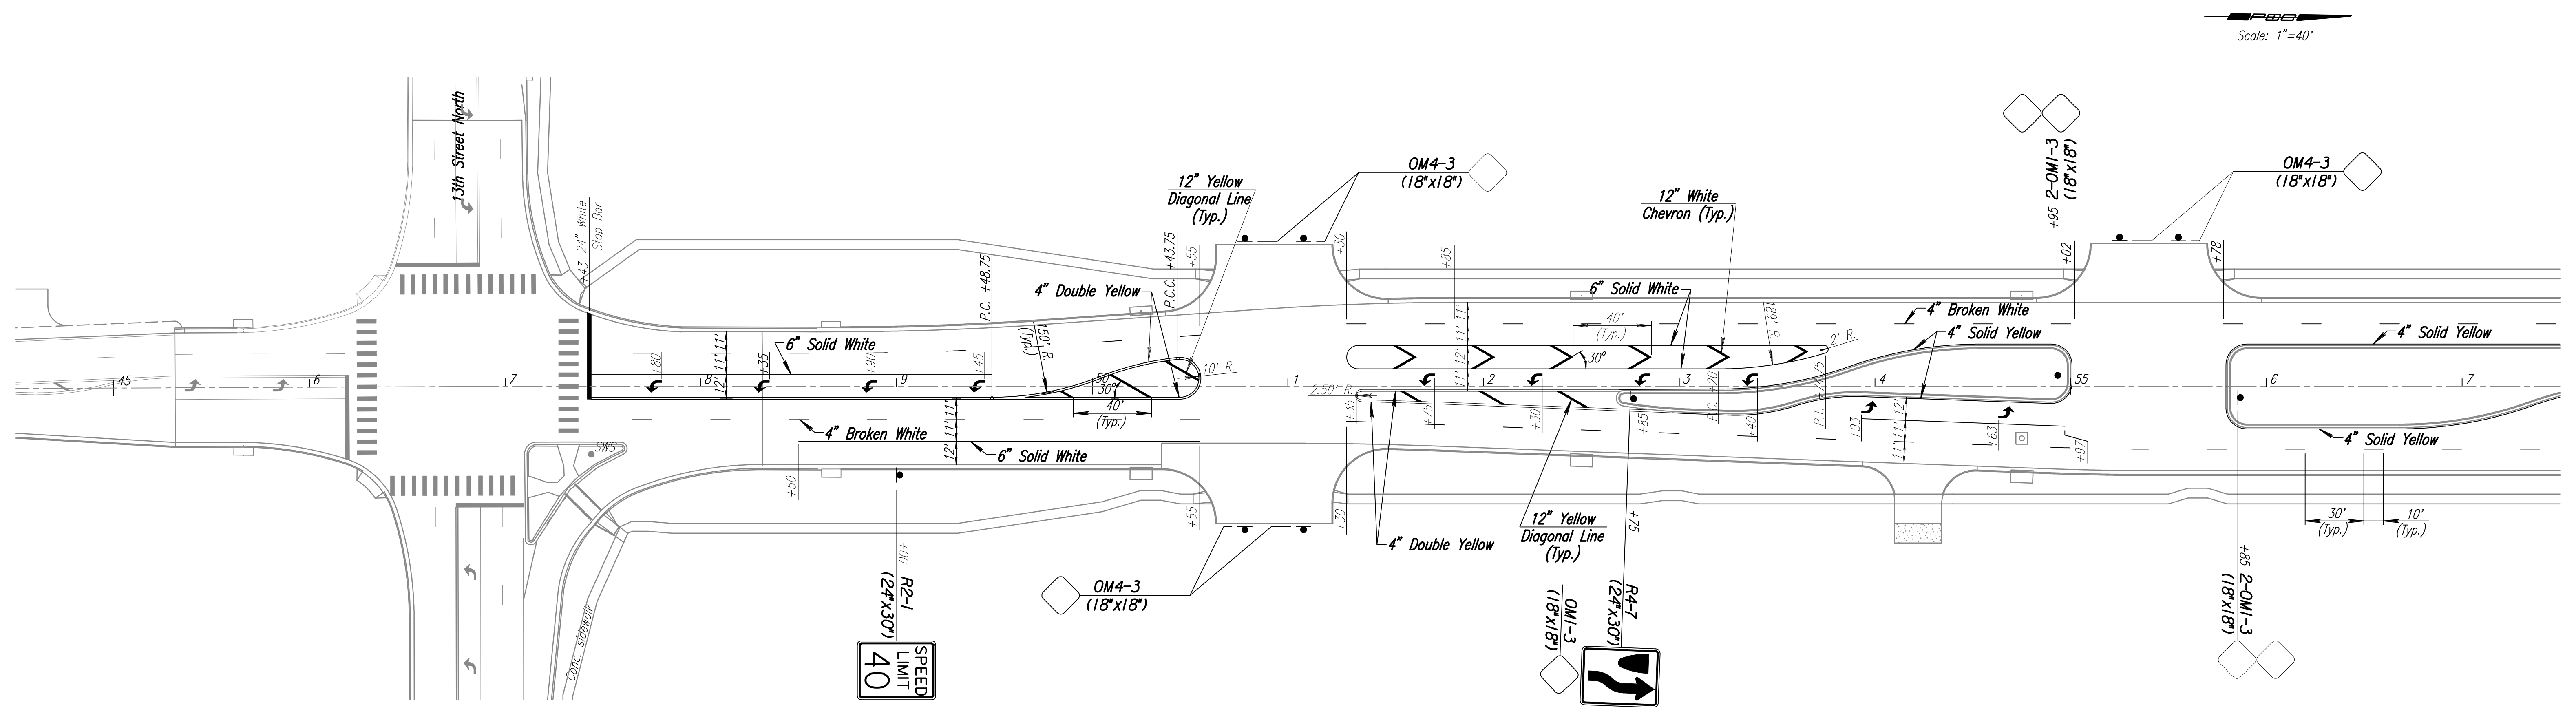

Scale: 1"=40'

DSNR: RPG OPER: SVR SCALE: 1"=40'
 1/2004/04219/SIGNING_MARKING/MK33.DGN 11-02-2004 16:36:06 LAST REV: 9-27-2005 BY: svb



No.	Revision	By	Date
SIGNING & MARKING PLAN GREENWICH RD. STA. 33+00 TO STA. 57+00 JAMES L. ARMOUR, P.E. - CITY ENGINEER CITY OF WICHITA PROJECT NO. 472-84004 Professional Engineering Consultants, P.A. 303 S. TOPEKA • WICHITA, KANSAS 67202 316-262-2691 • FAX 316-262-3003			
Designed by	RPG	Job No.	04219
Drawn by	SVB	Date	NOVEMBER, 2004

SHT. 141 of 215