



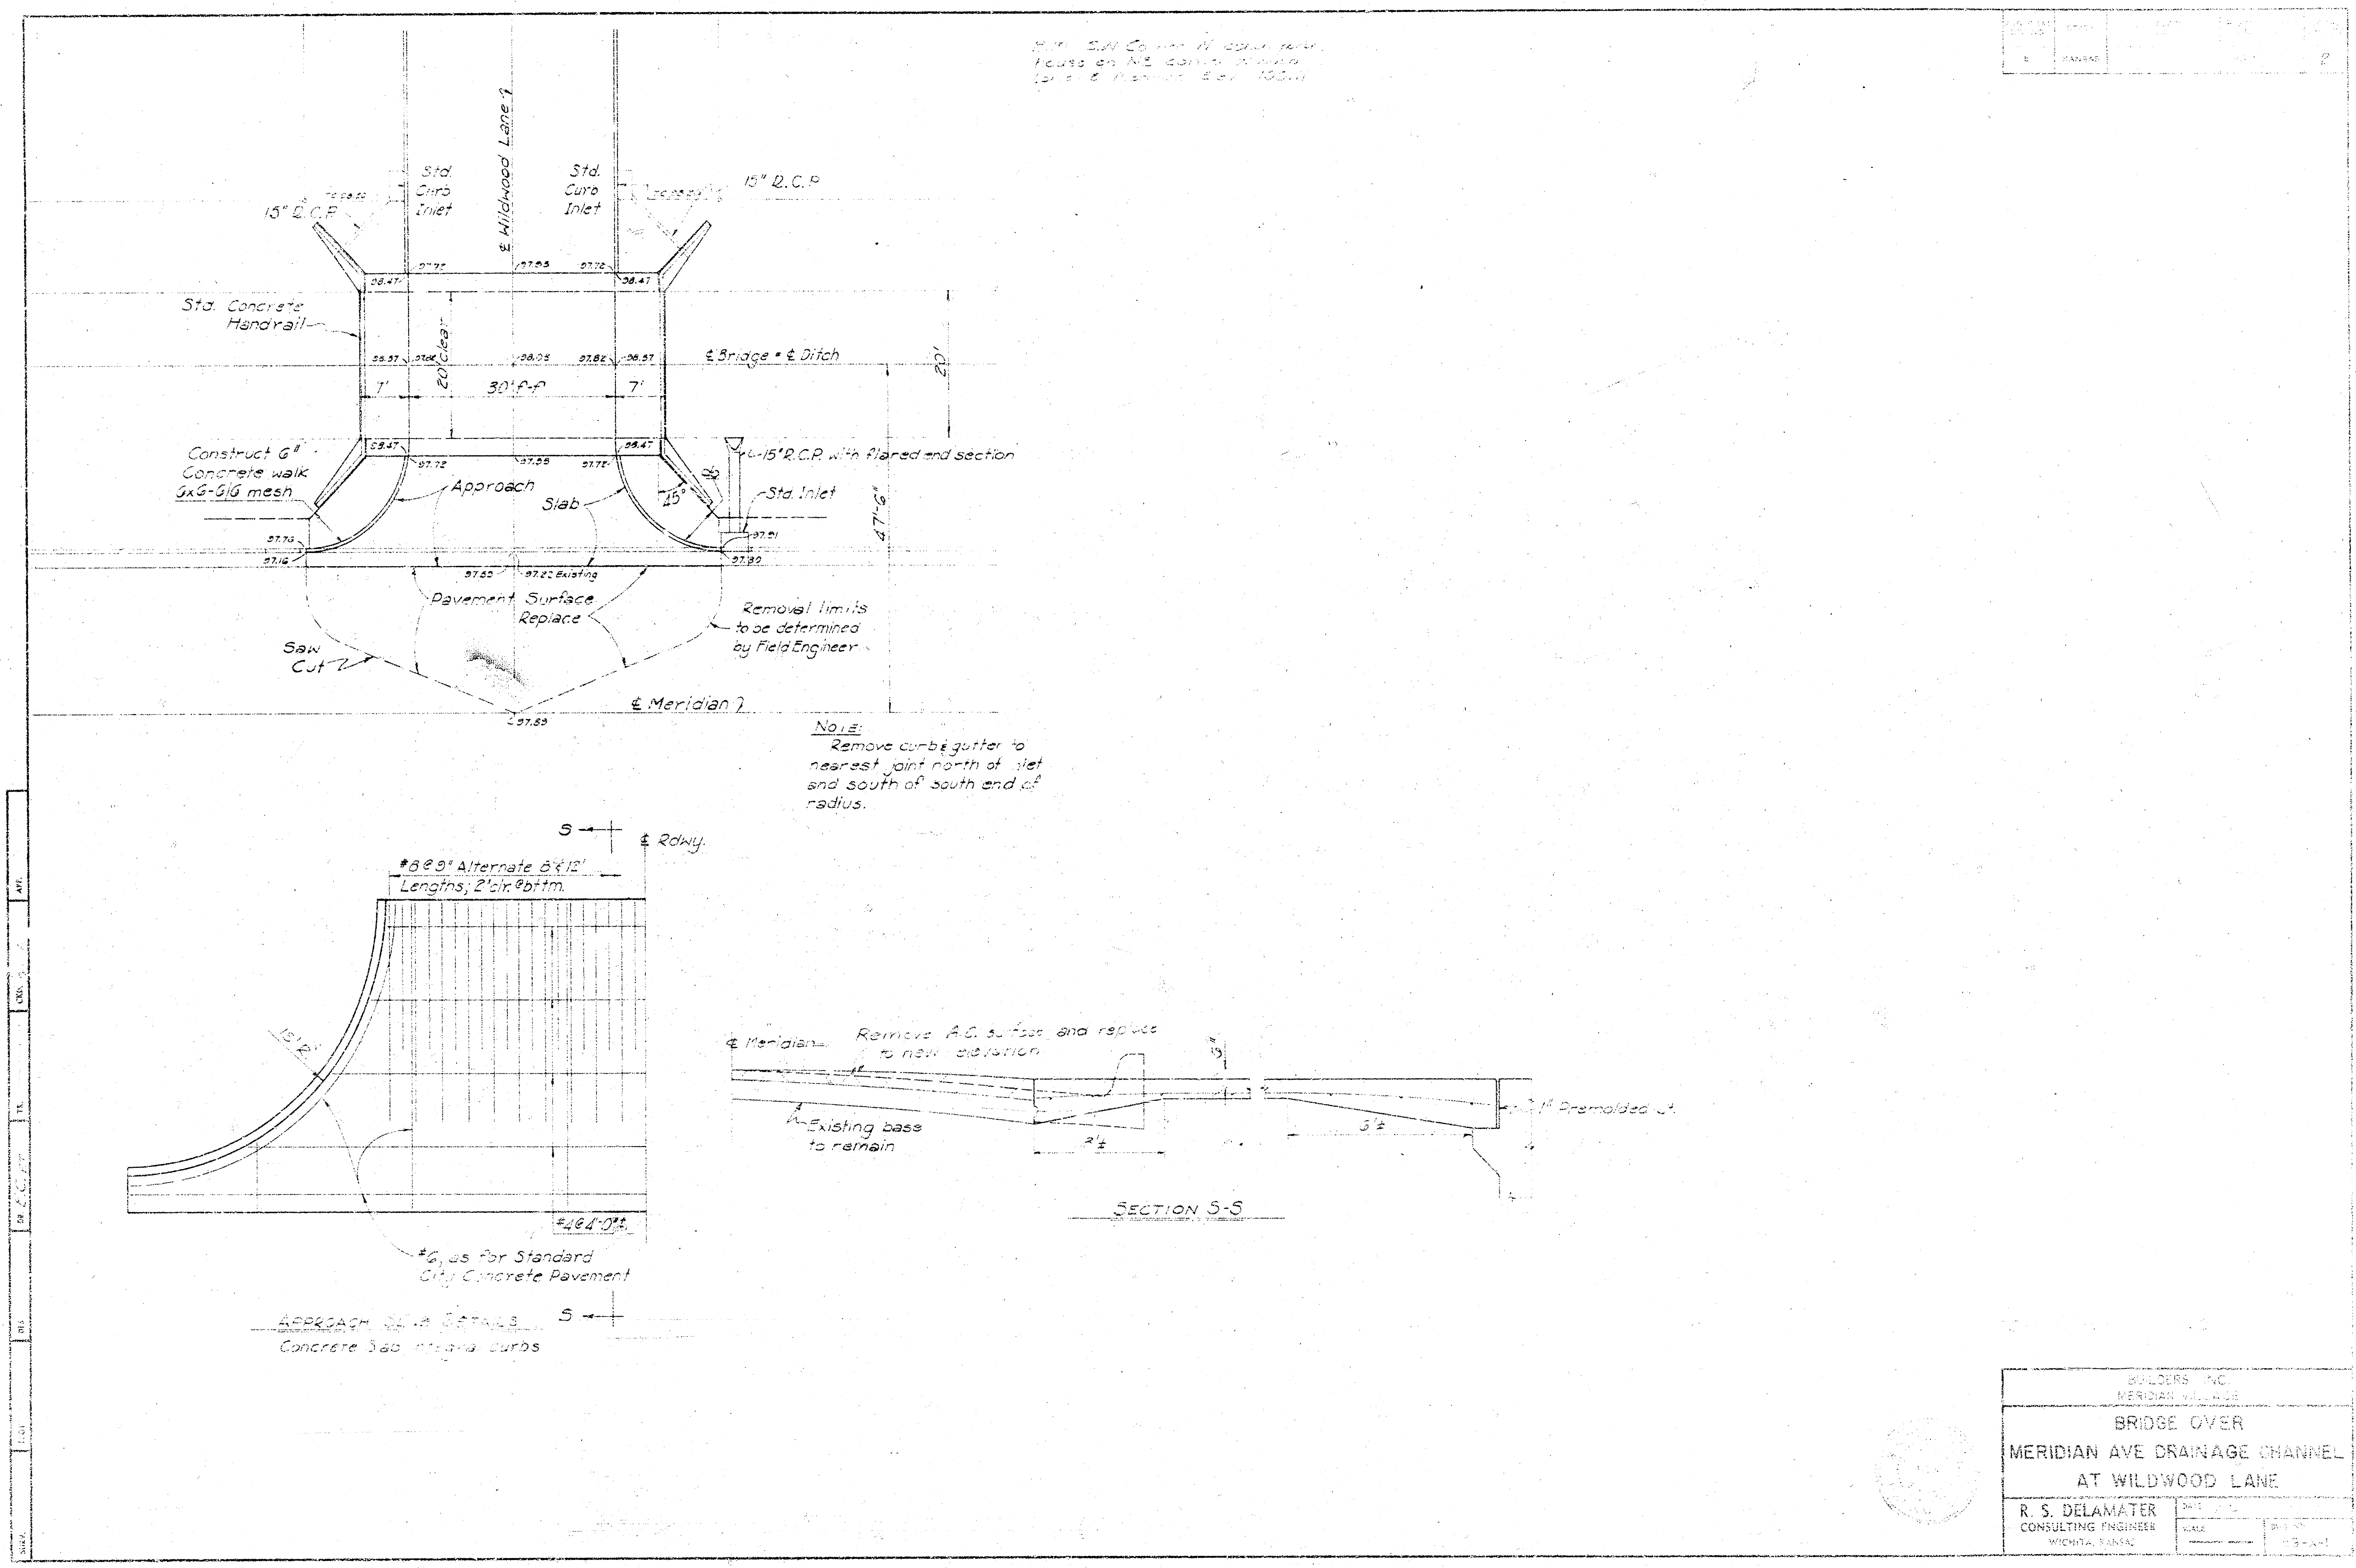
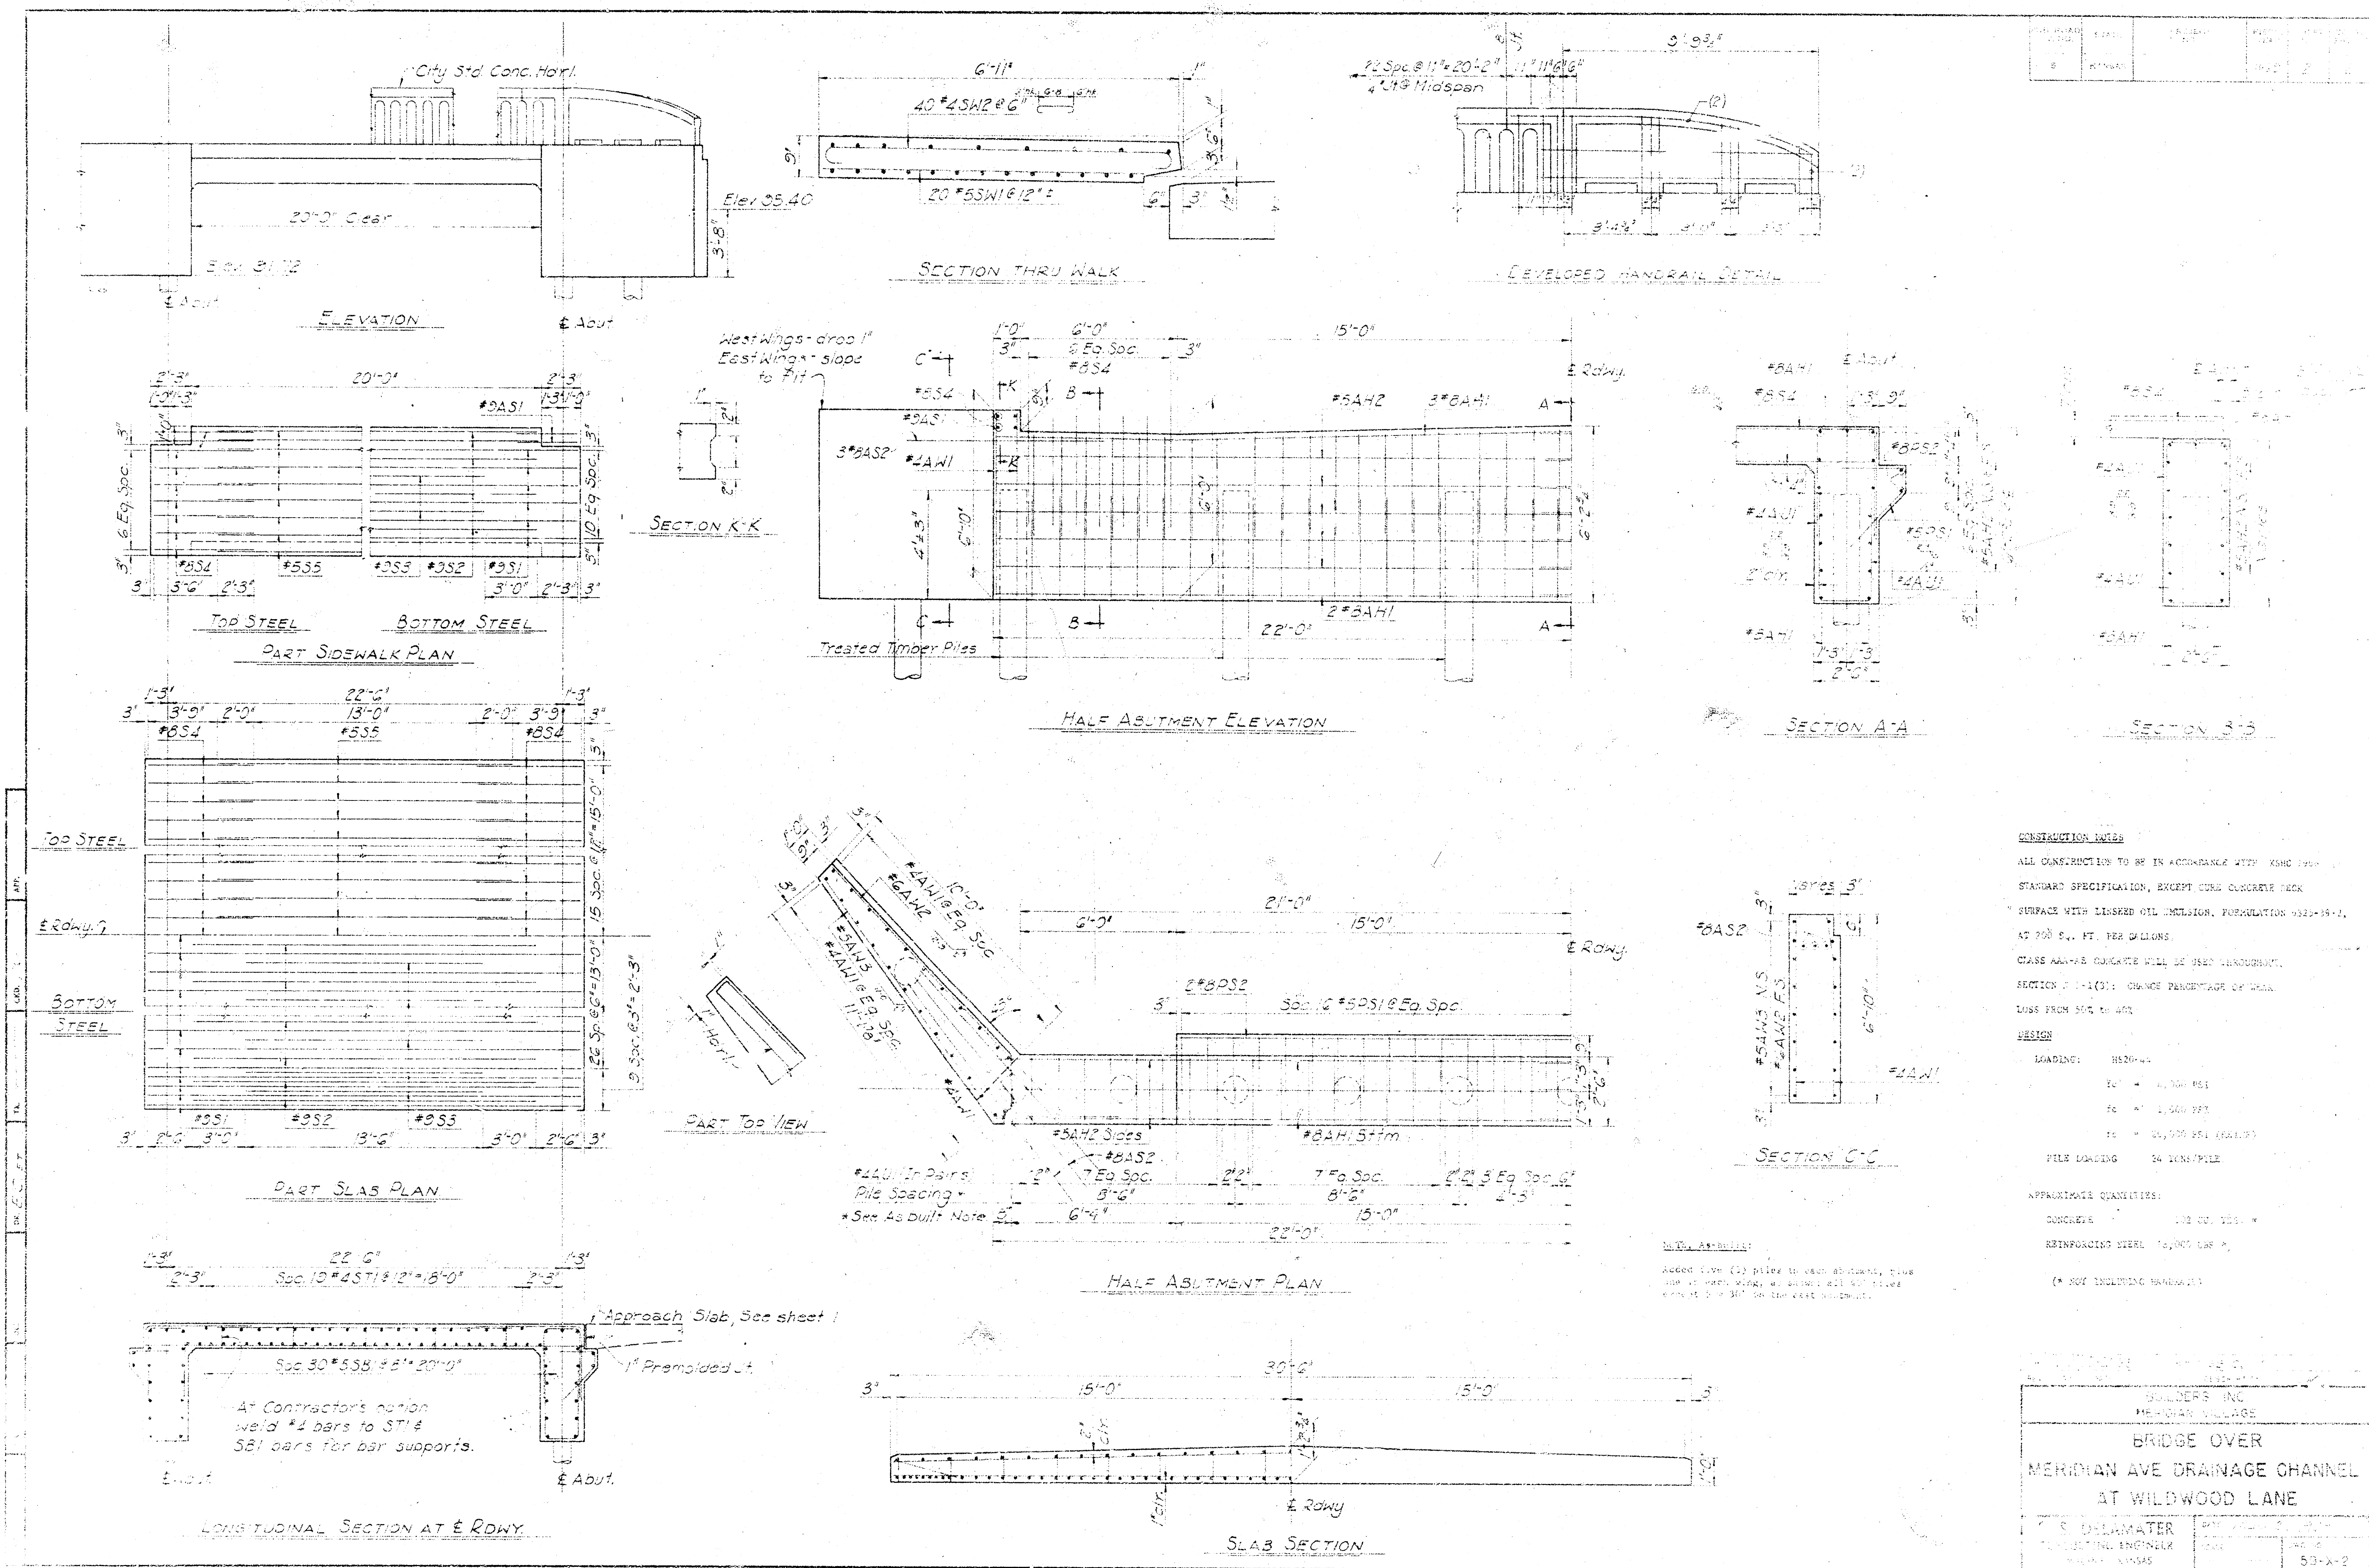
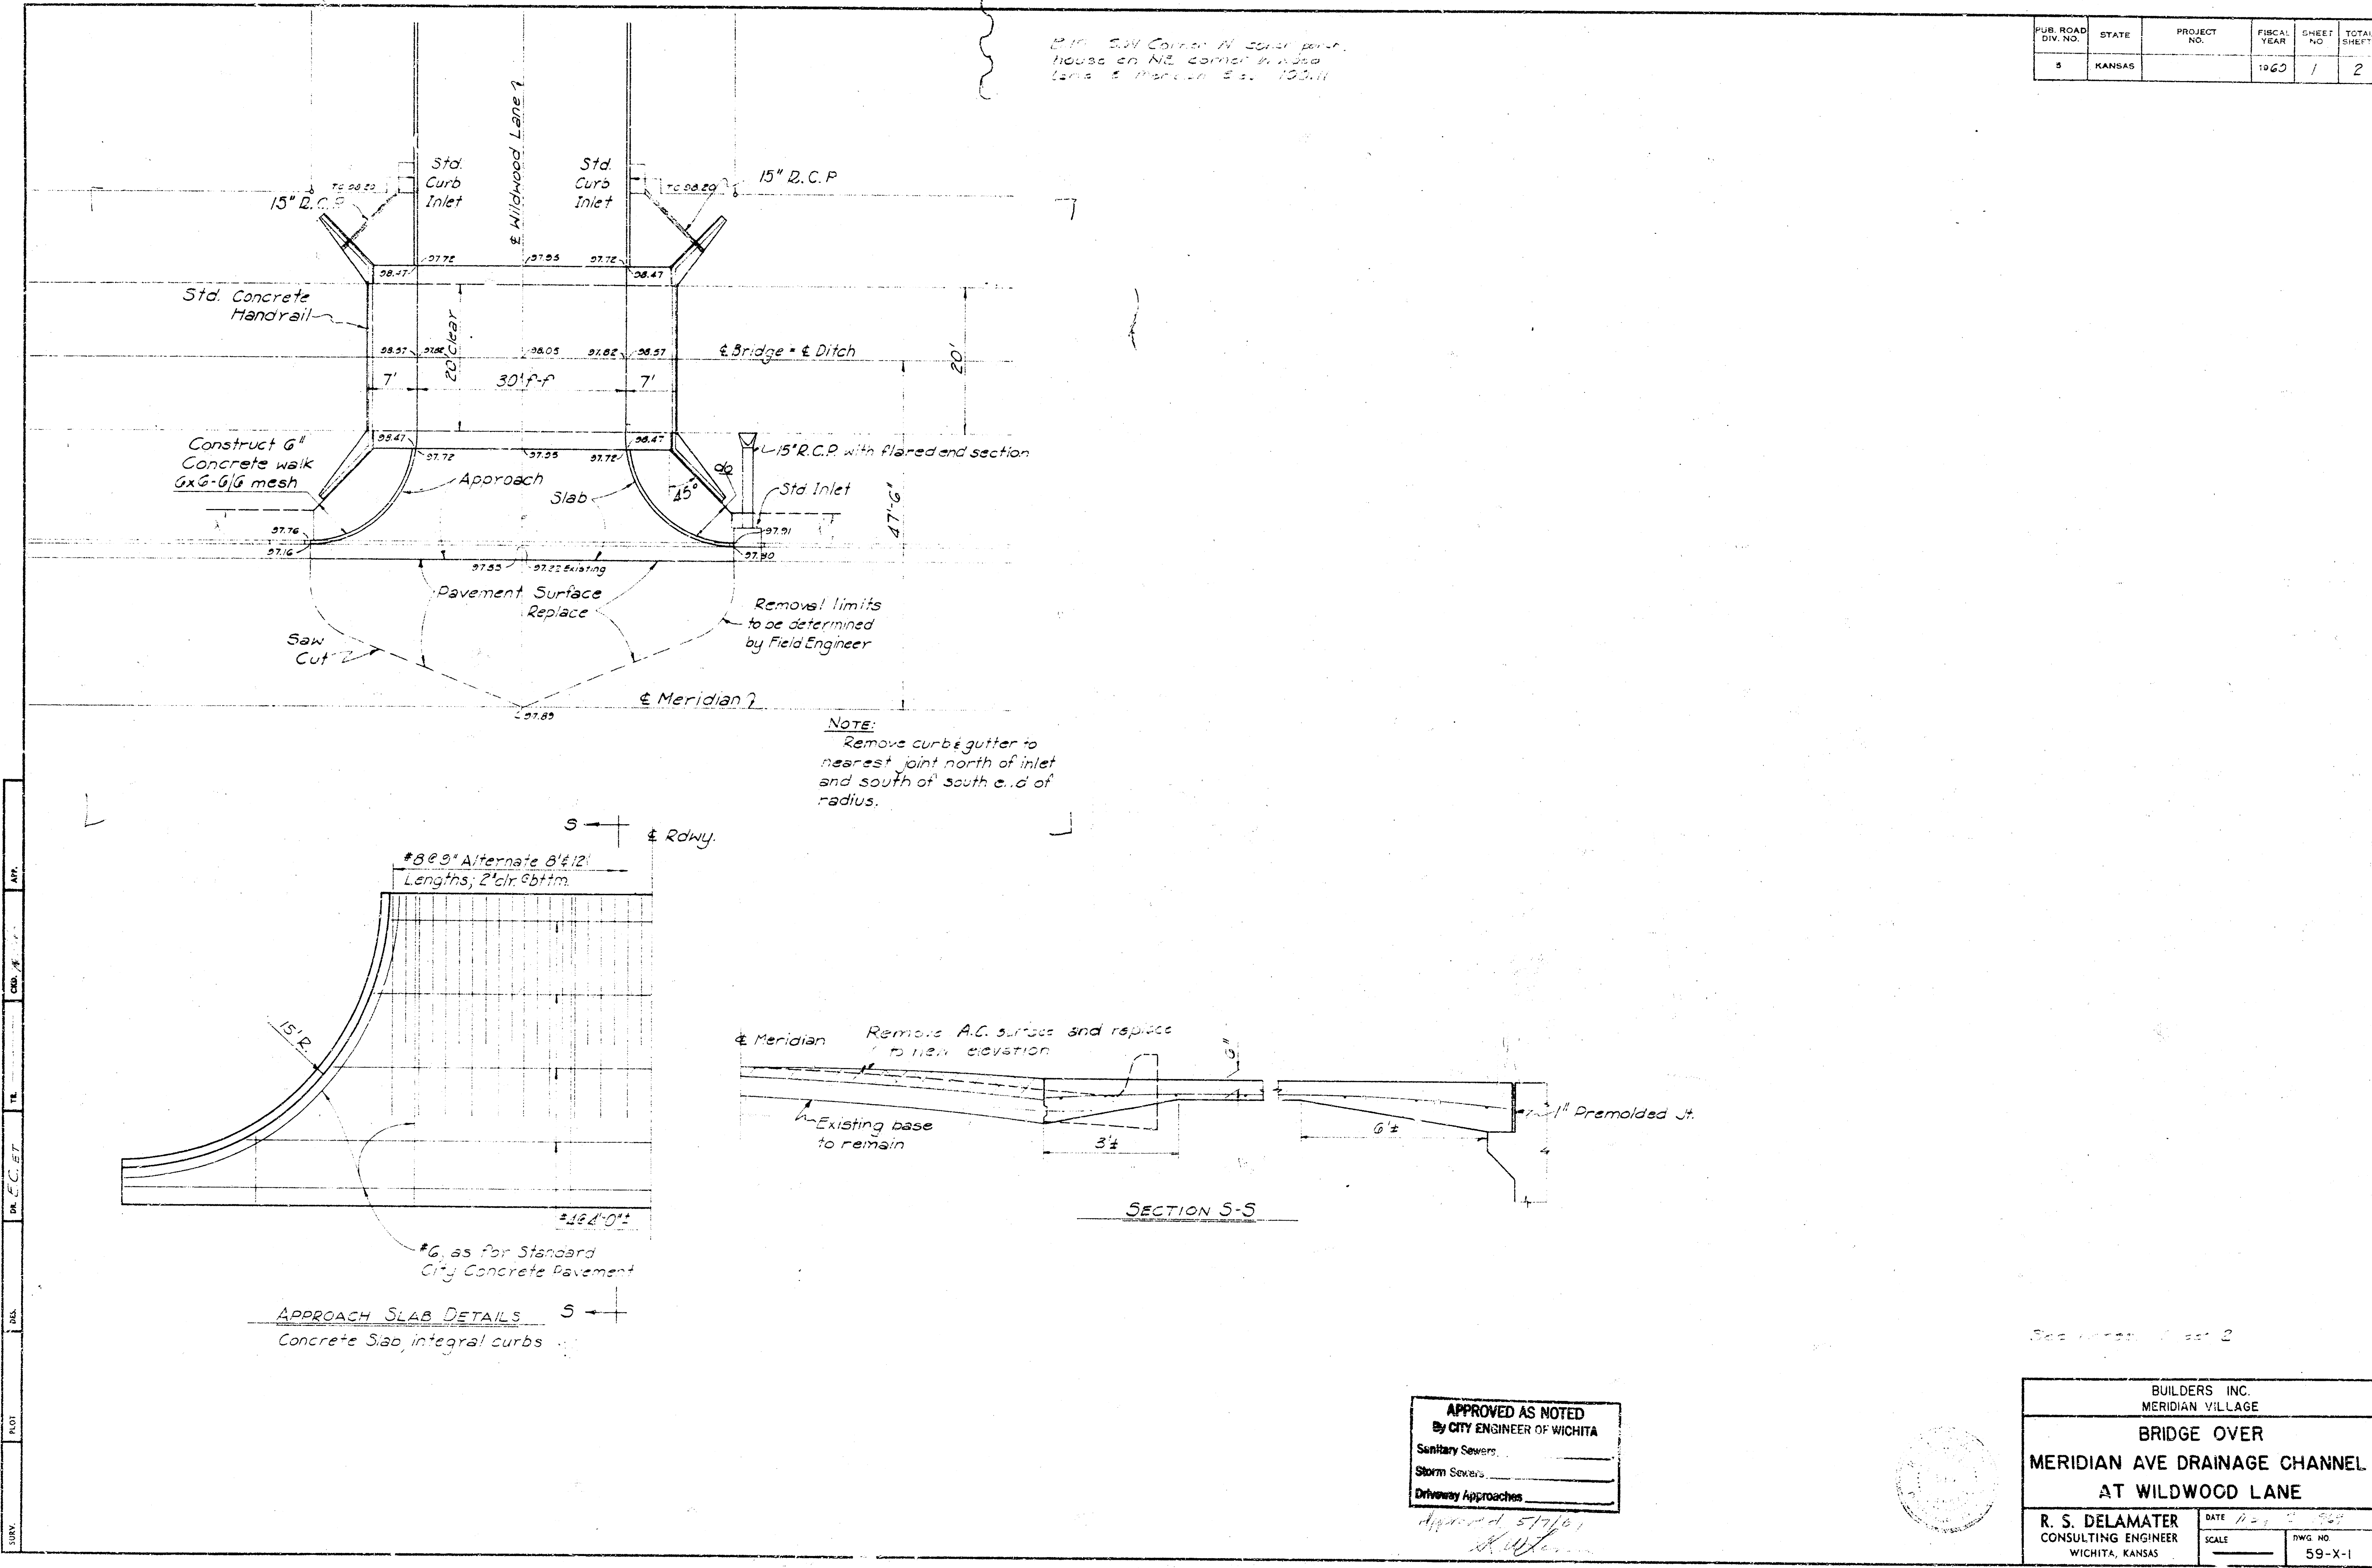
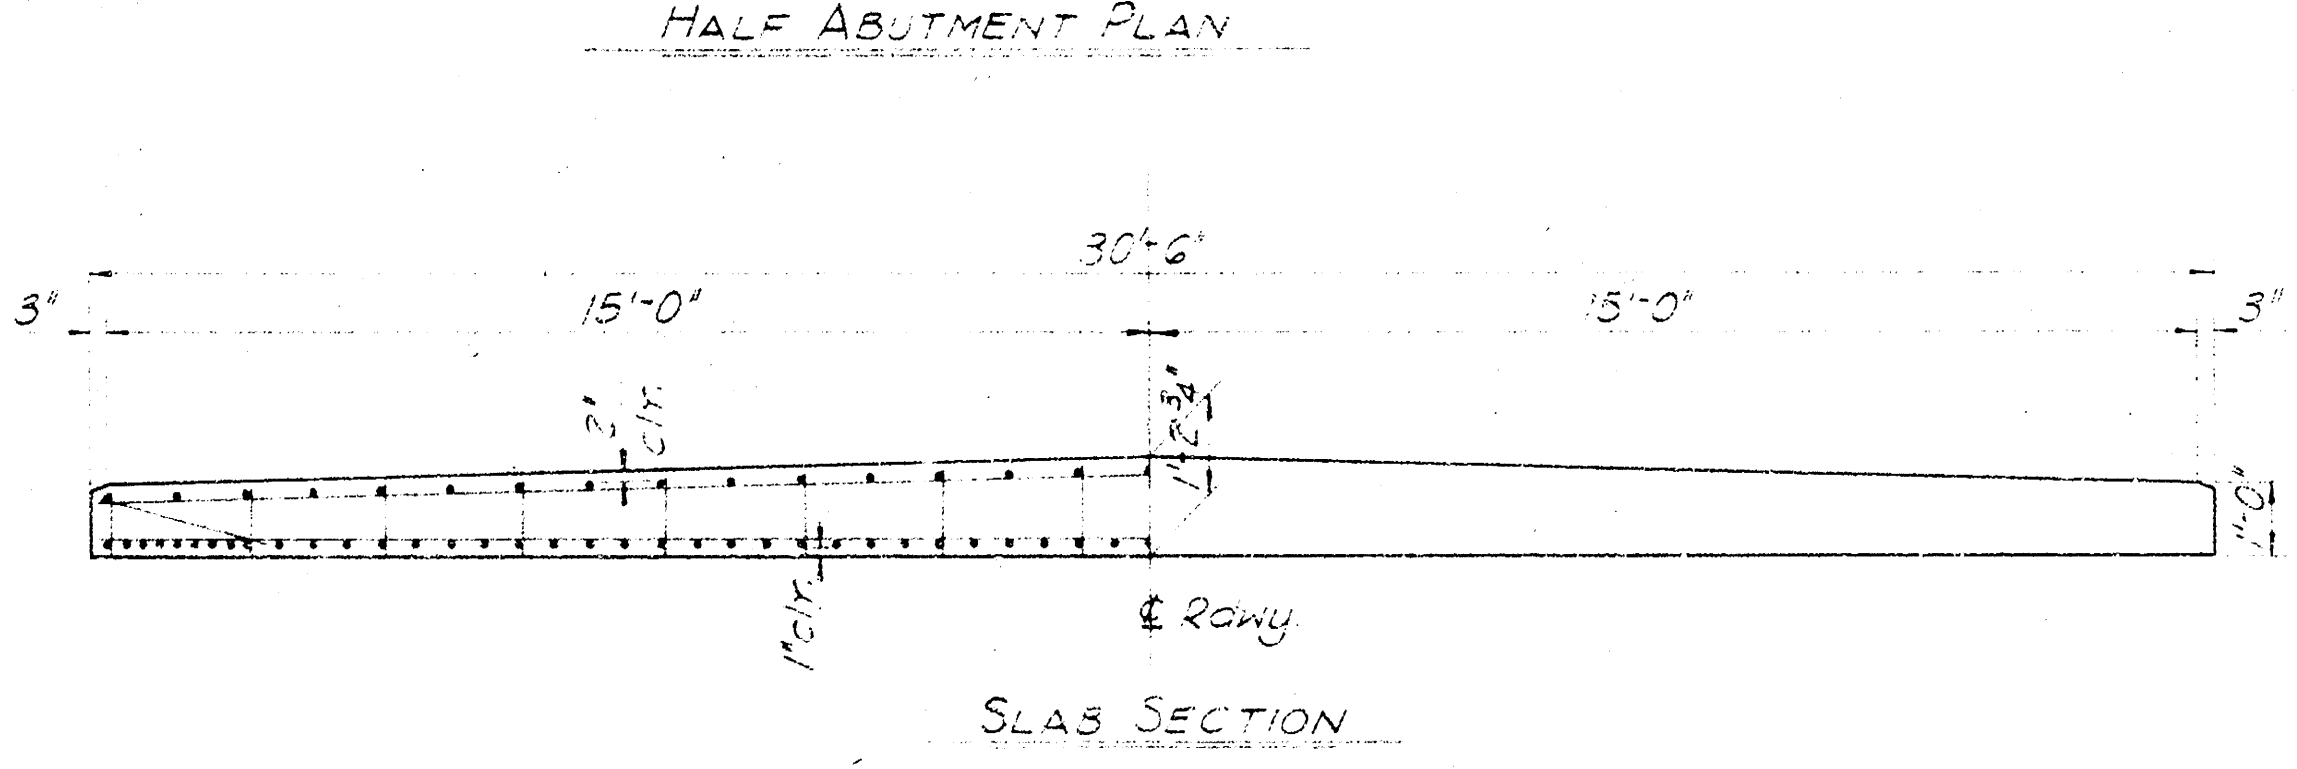
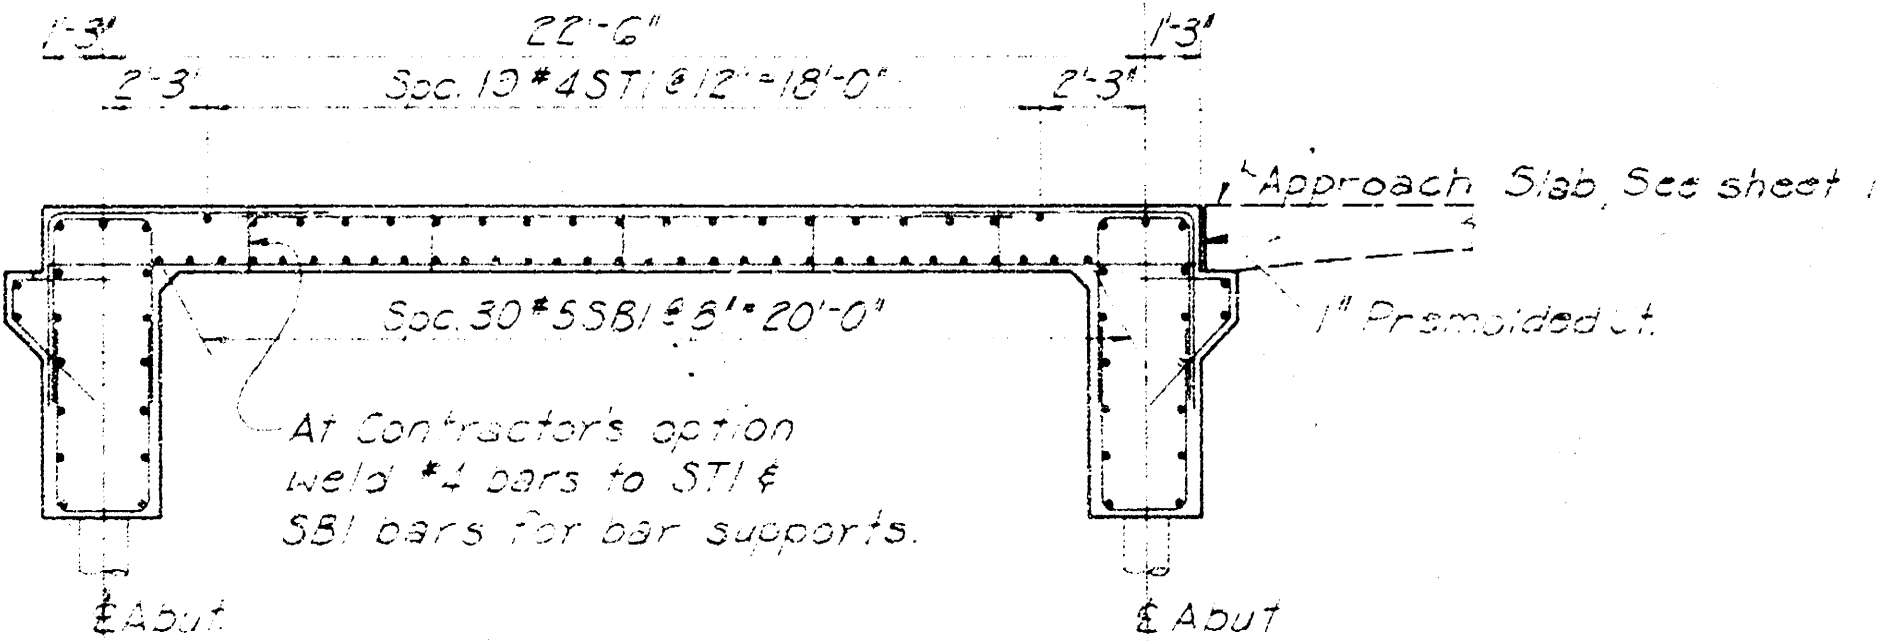
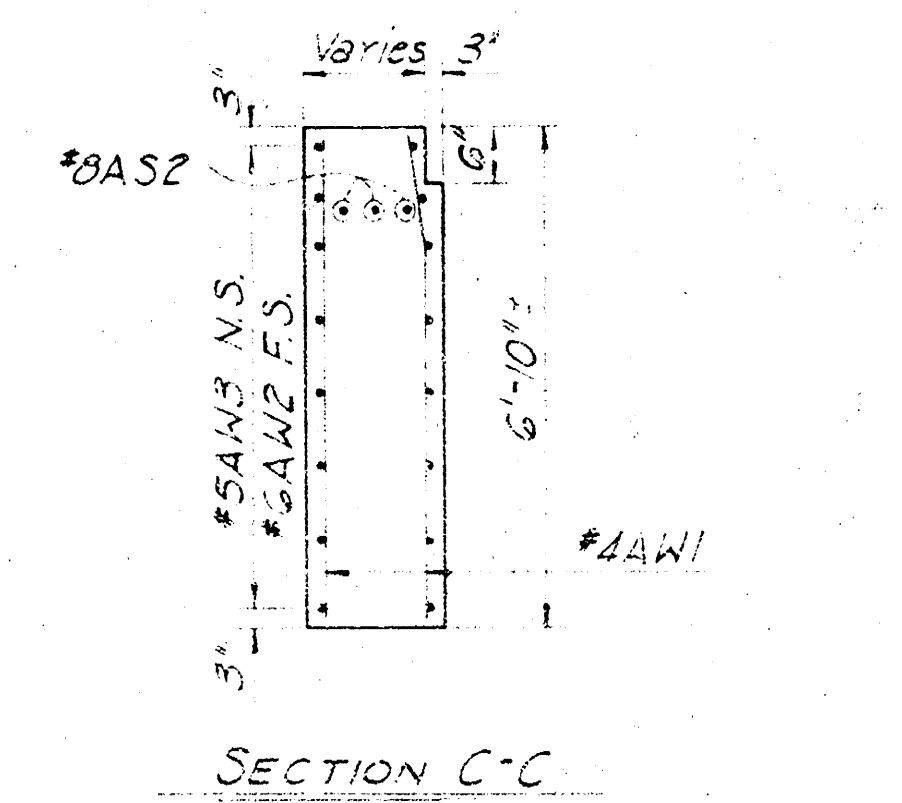
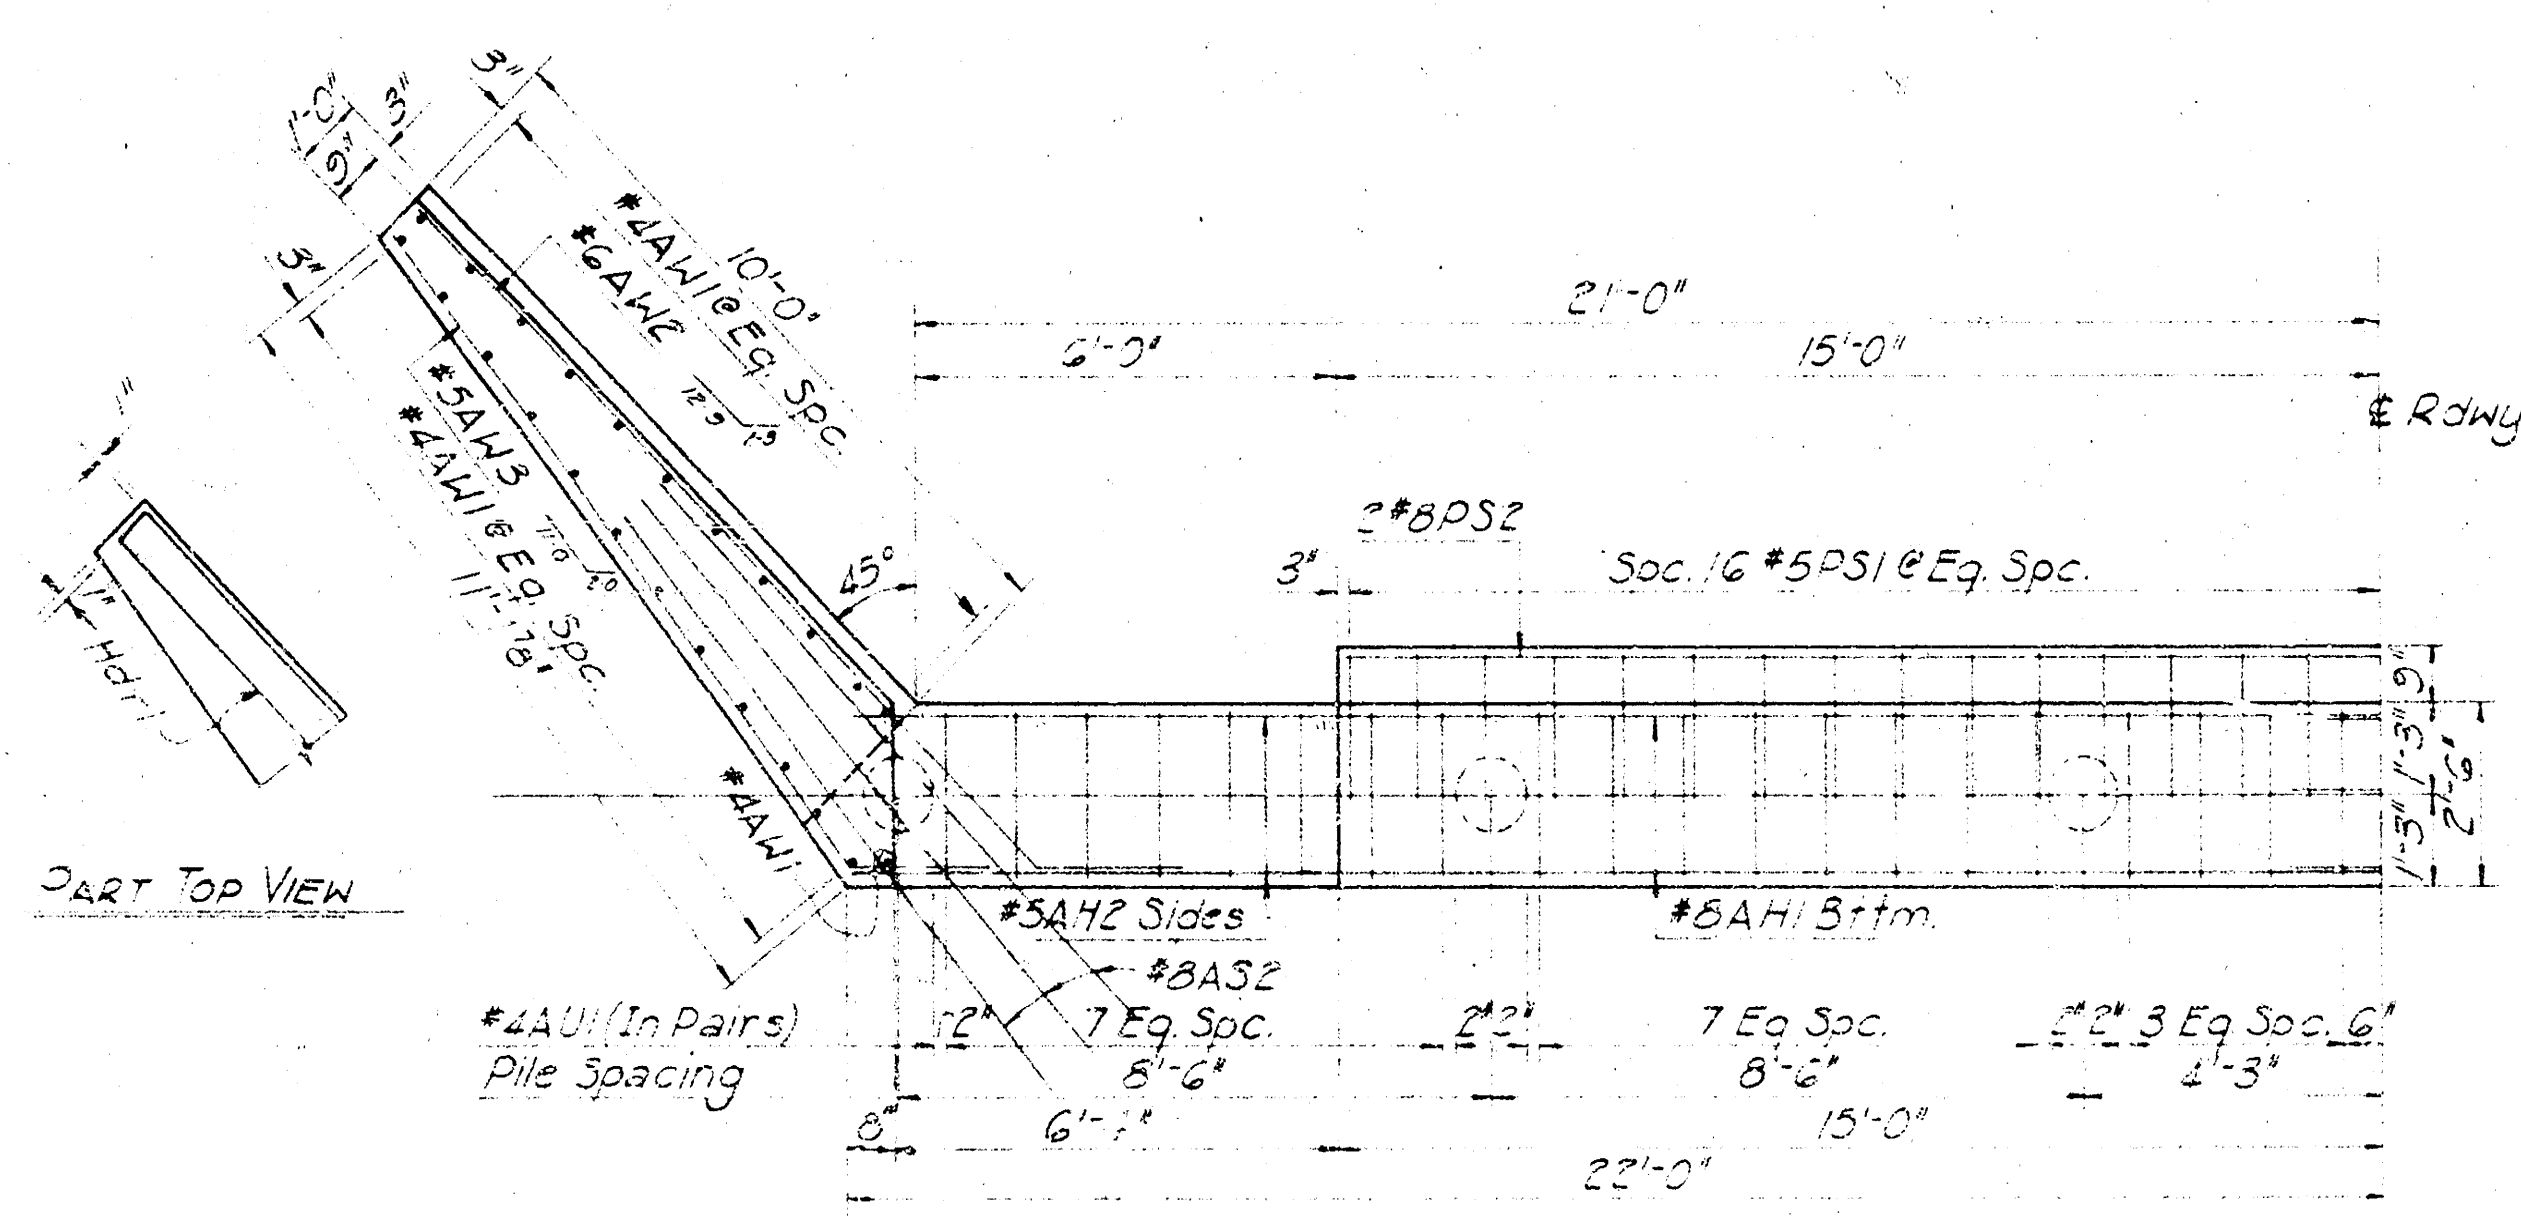
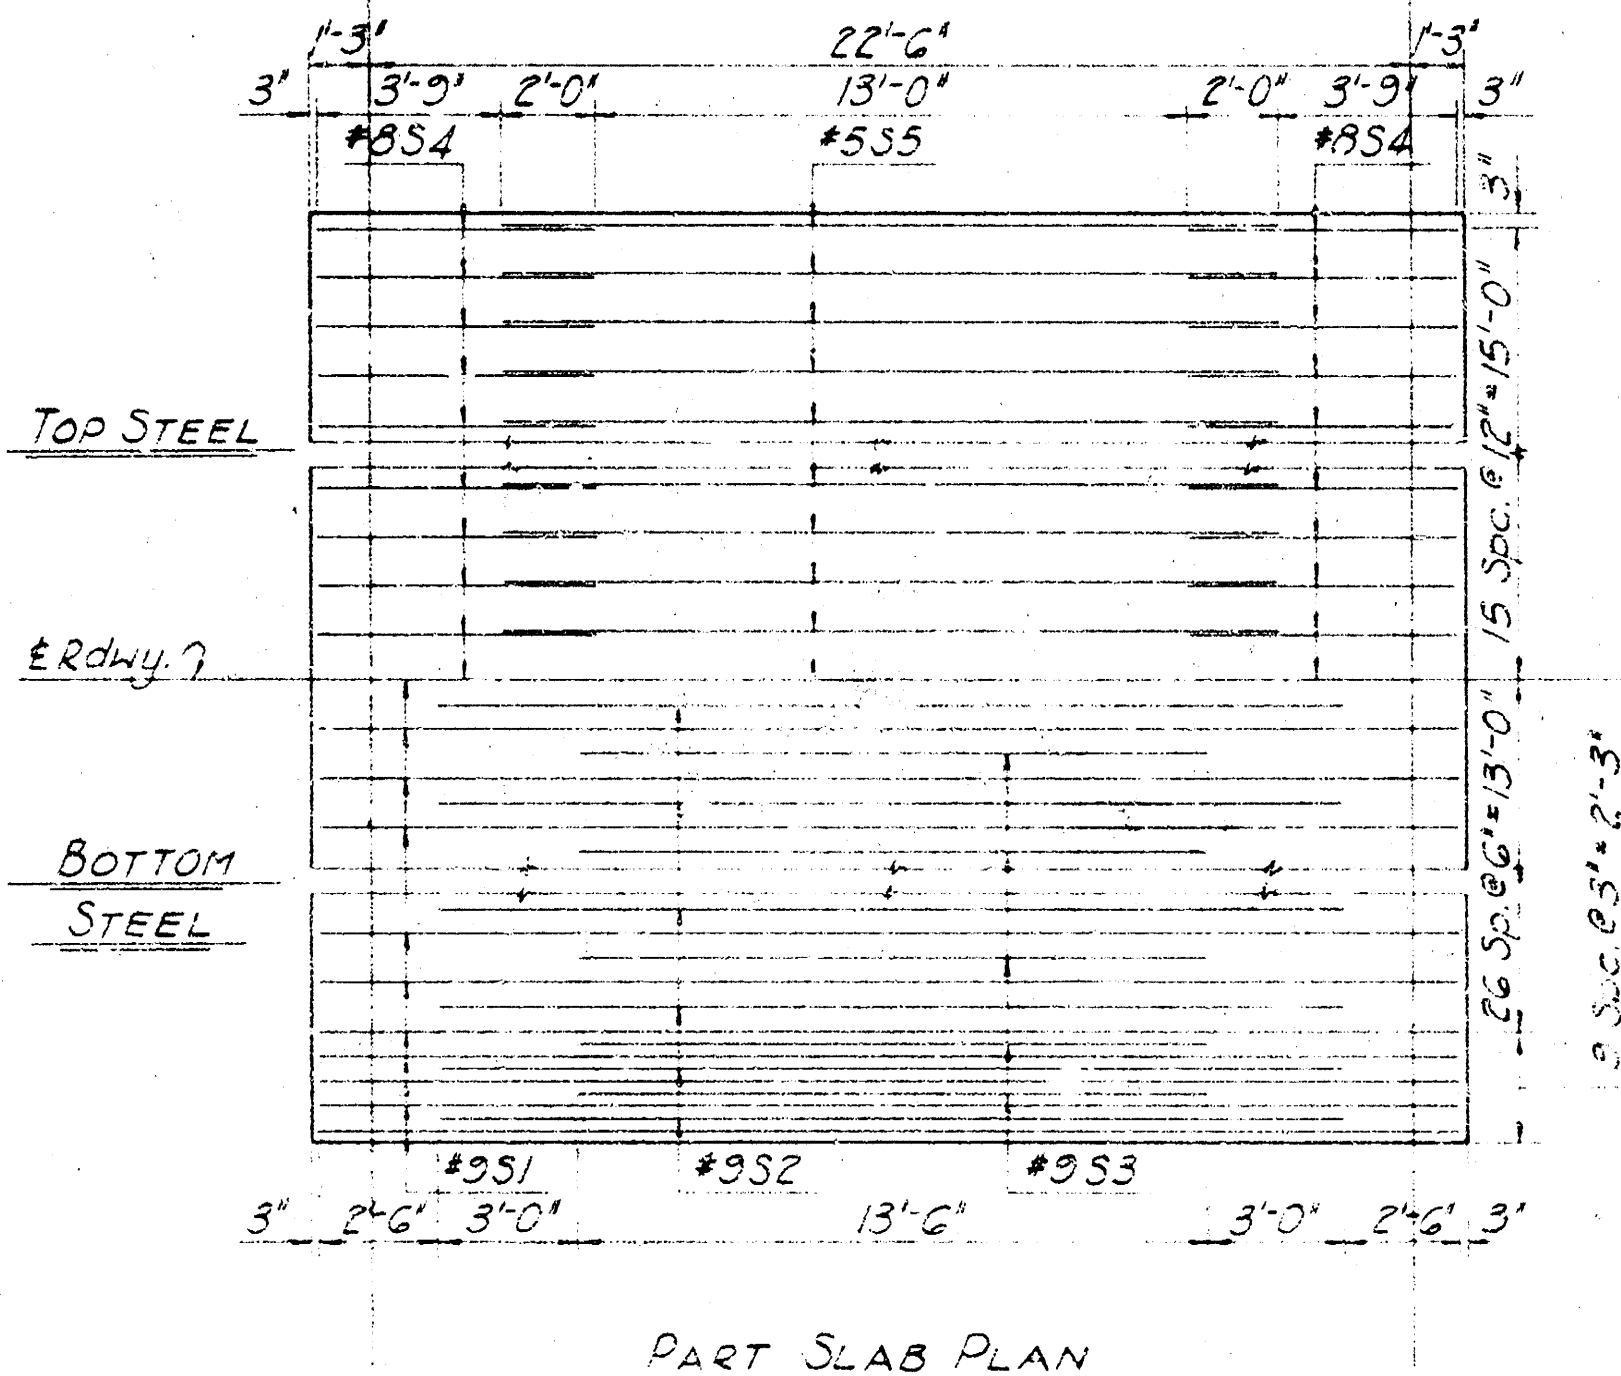
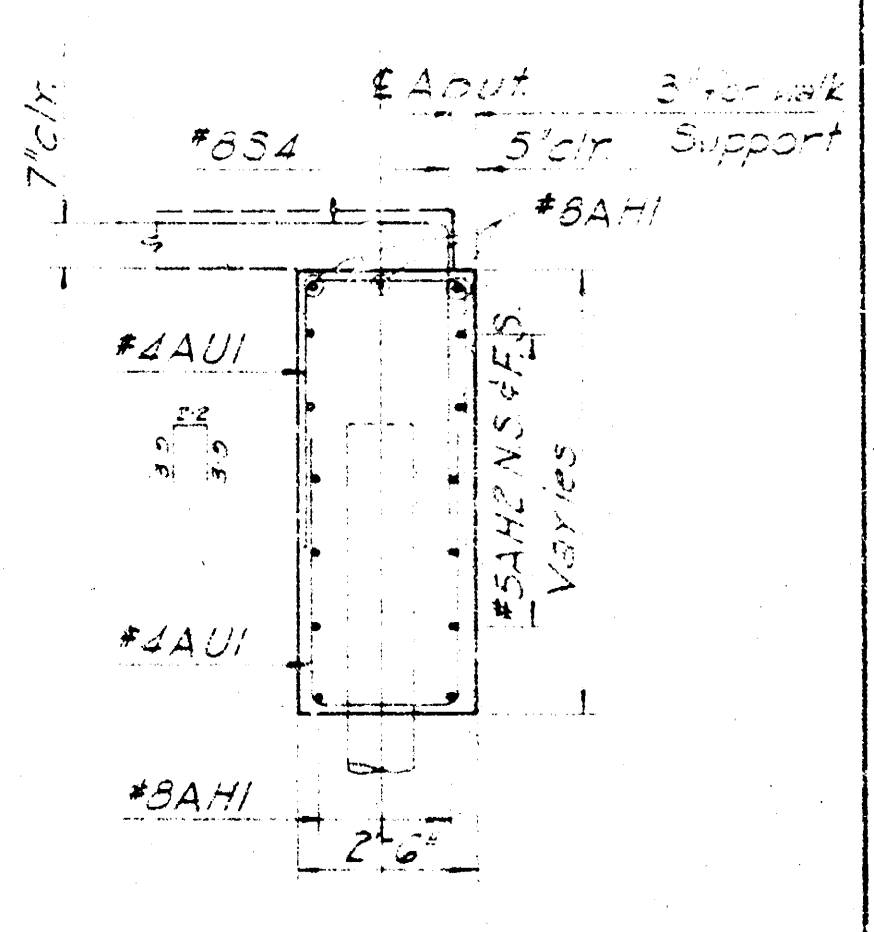
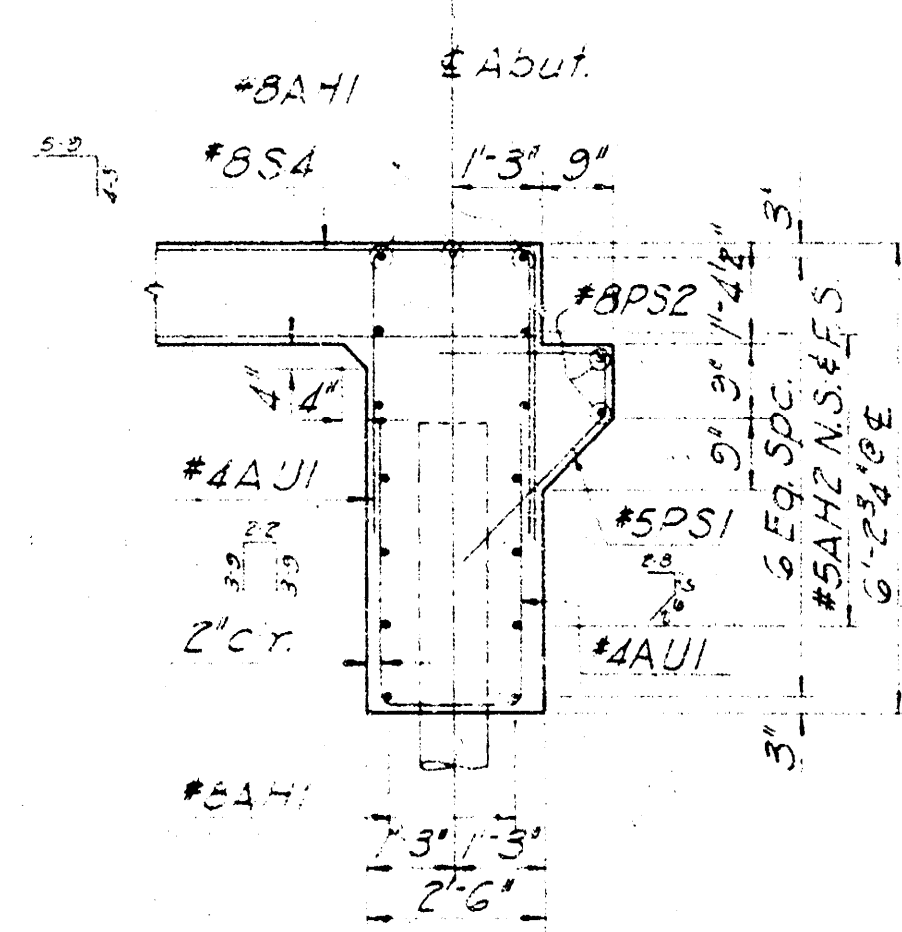


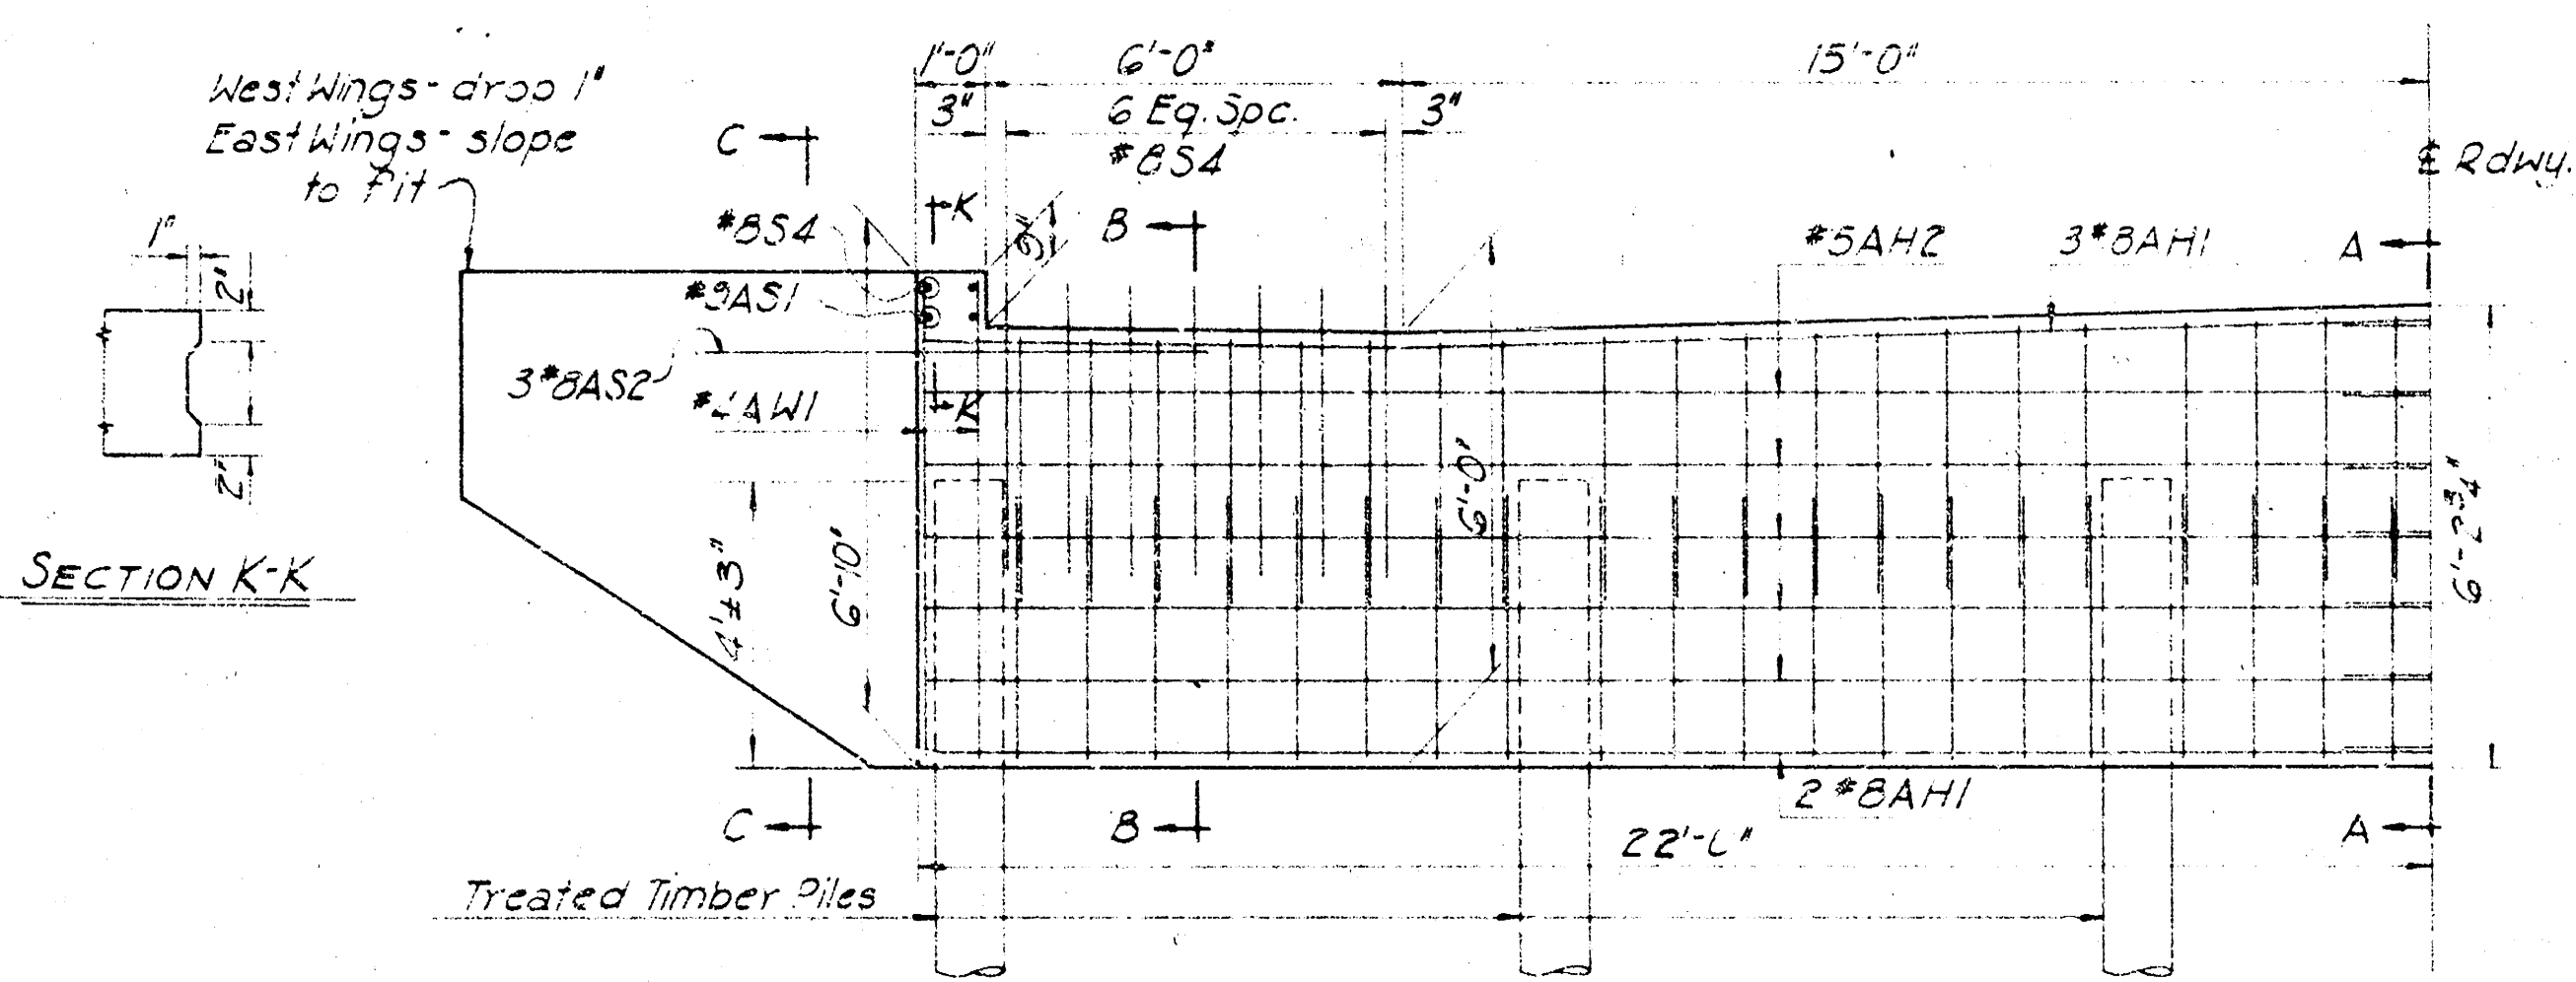

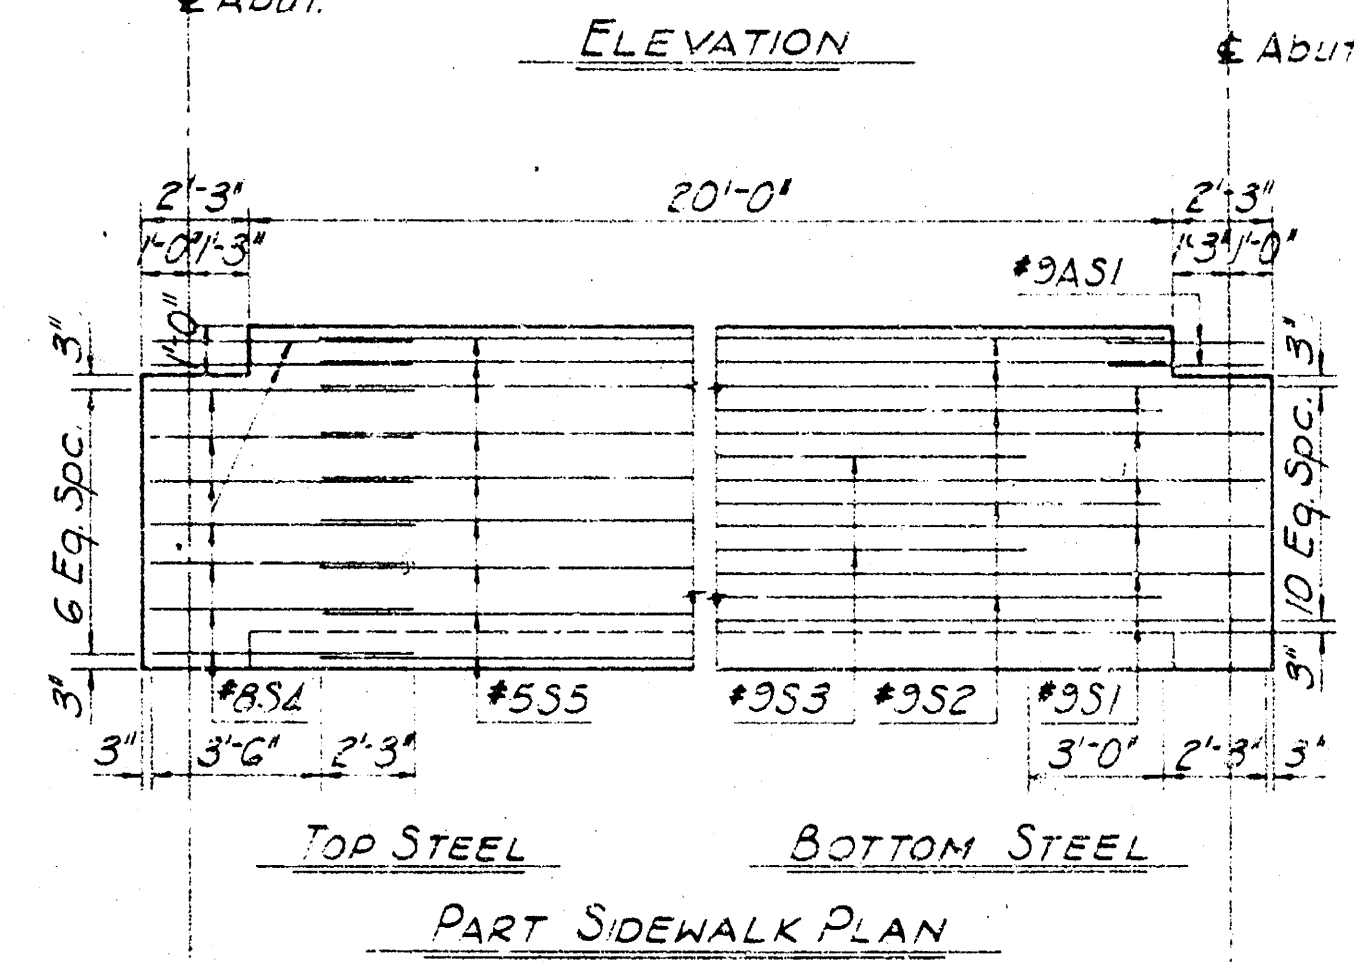

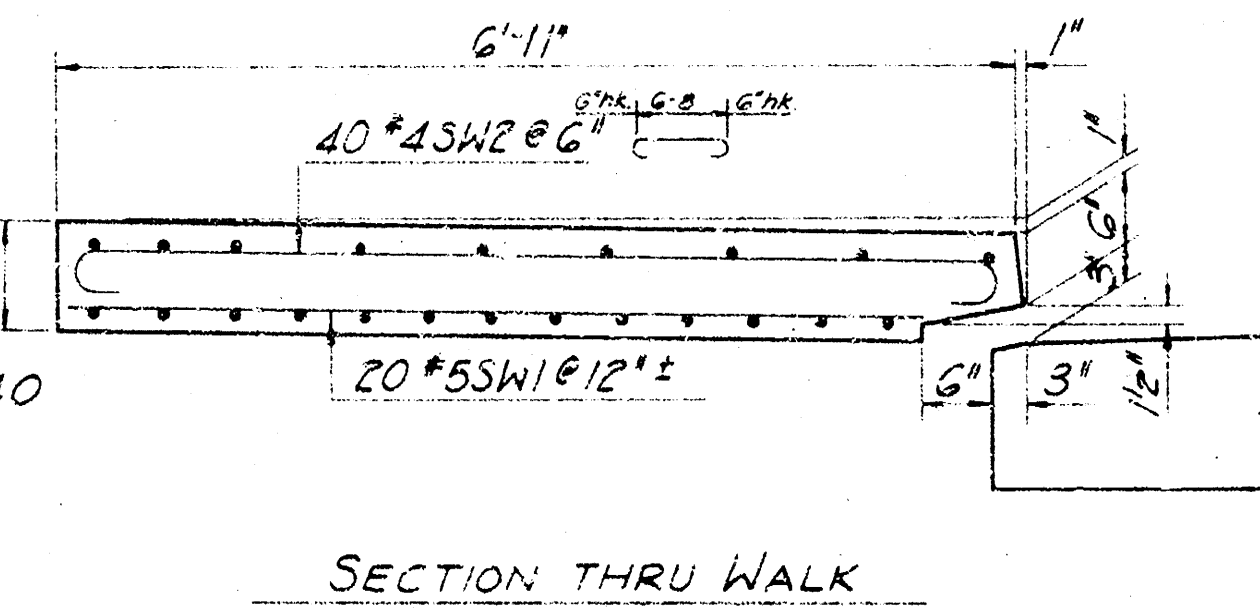

FOR ROAD DIV. NO.	STATE	PROJECT NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
5	KANSAS		1962	2	2

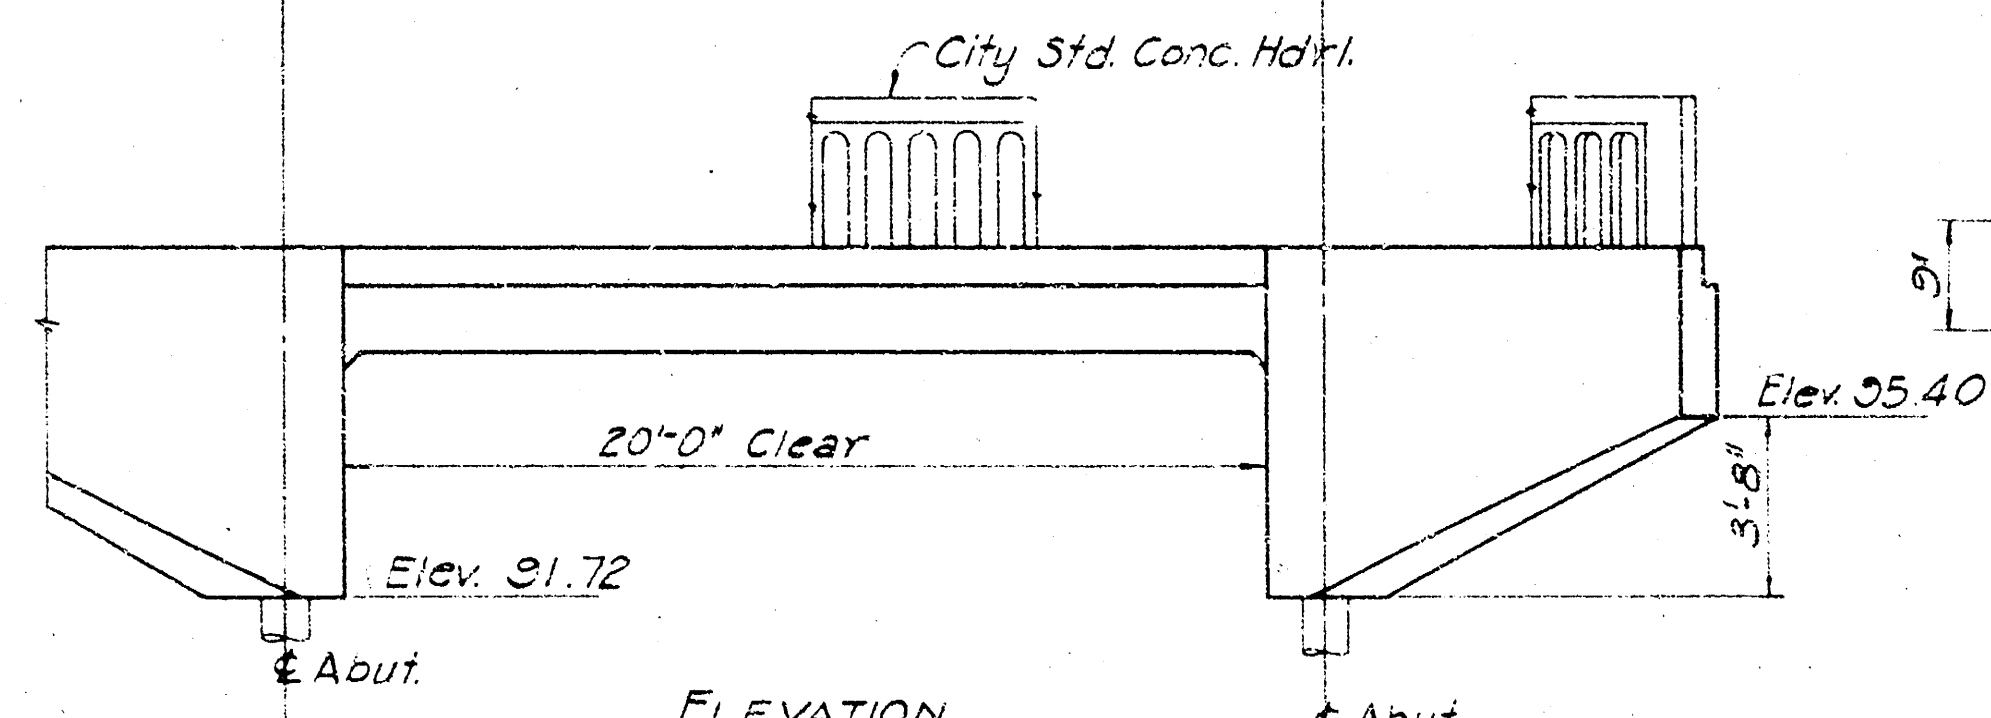

CONSTRUCTION NOTES

ALL CONSTRUCTION TO BE IN ACCORDANCE WITH KSCC 1966
STANDARD SPECIFICATION, EXCEPT CURE CONCRETE DECK
SURFACE WITH LINSEED OIL EMULSION, FORMULATION 6325-39-2,
AT 200 SQ. FT. PER GALLON.
CLASS AAA-AE CONCRETE WILL BE USED THROUGHOUT.
SECTION J-1(1): CHANGE PERCENTAGE OF WEAR
LOSS FROM 50% TO 40%.

DESIGN

LOADING: HS20-44
fc = 4,000 PSI
fc = 1,800 PSI
fs = 20,000 PSI (REINF.)
PILE LOADING 24 TONS/PILE

APPROXIMATE QUANTITIES:
CONCRETE 102 CU. YDS. *
REINFORCING STEEL 18,000 LBS. *

(* NOT INCLUDING HANDRAIL)

BUILDERS, INC. MERIDIAN VILLAGE	
BRIDGE OVER MERIDIAN AVE DRAINAGE CHANNEL AT WILDWOOD LANE	
R. S. DELAMATER CONSULTING ENGINEER WICHITA, KANSAS	CHECKED BY DATE 59-X-2