




PROJ. NO. DAKS 567066  
 CITY OF WICHITA, KANSAS  
 R.W. LINN - City Engineer

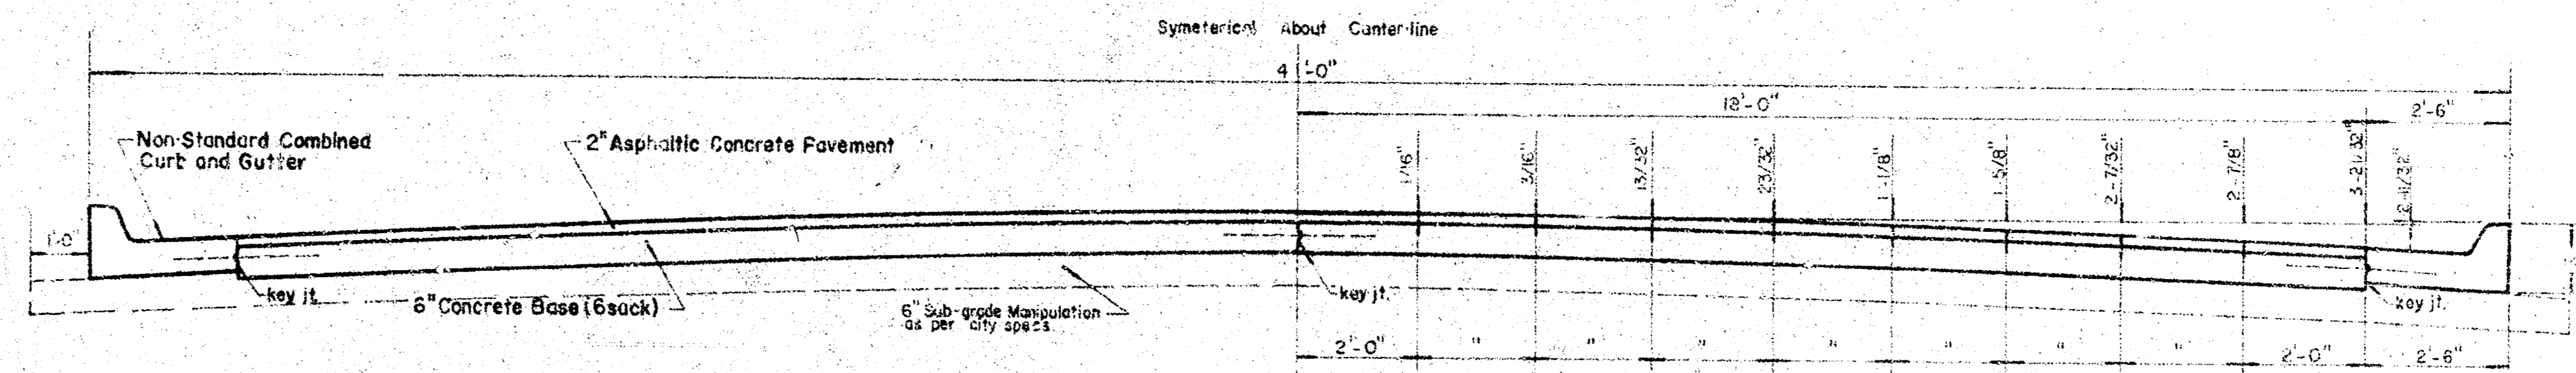

TYPICAL SECTION WITH STANDARD CROWN  
 40'-0" ASPHALTIC CONCRETE PAVEMENT

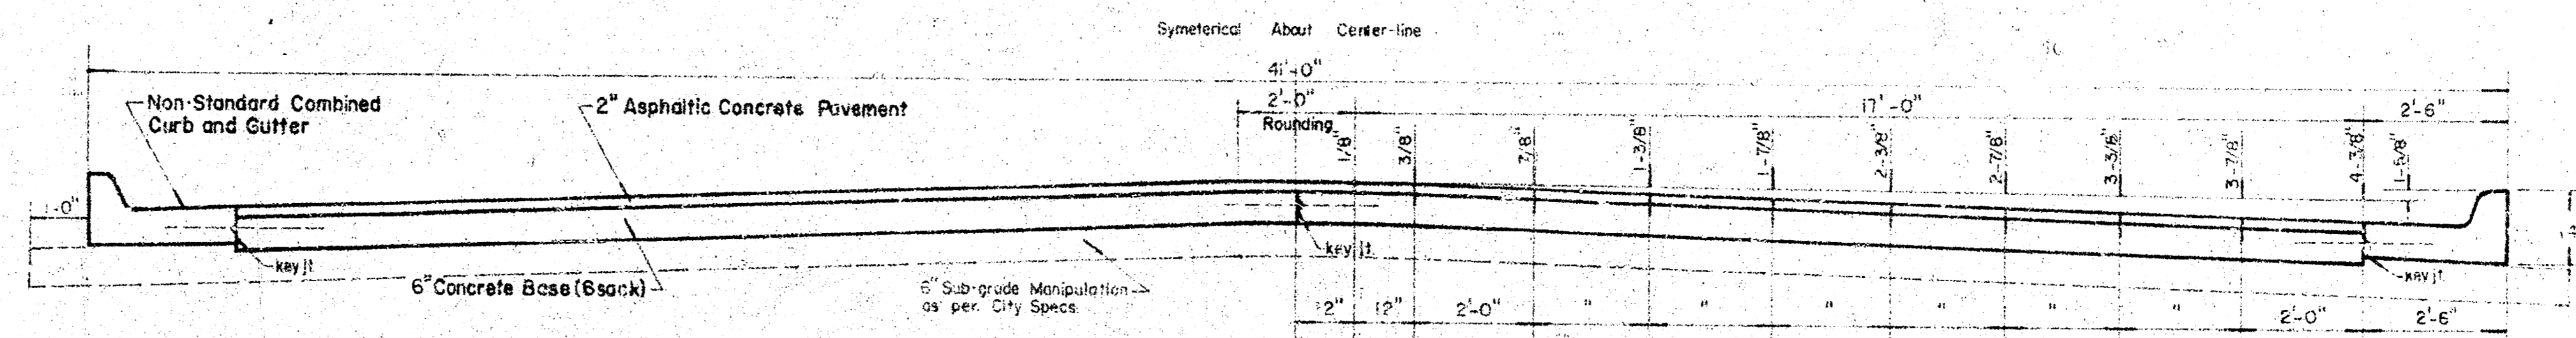


TYPICAL SECTION WITH ALTERNATE CROWN  
 40'-0" ASPHALTIC CONCRETE PAVEMENT

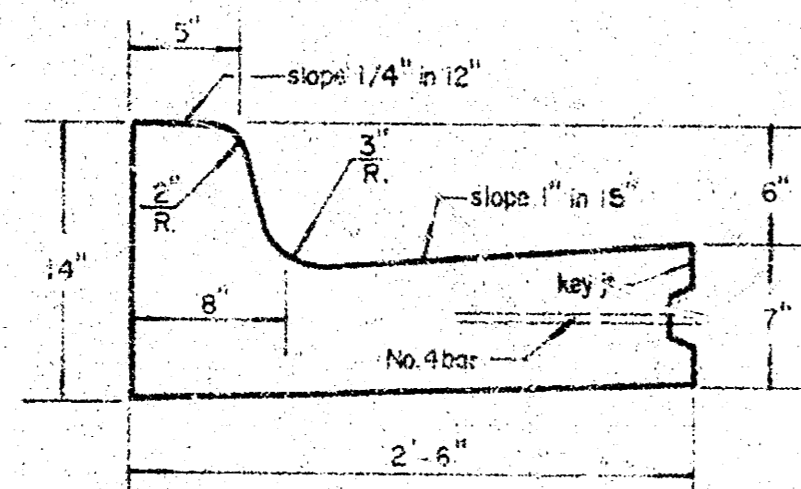

DETAIL OF NON-STANDARD  
 COMBINED CURB AND GUTTER

**GENERAL NOTES:**  
 Contraction joints may be constructed in combined curb and gutter by sawing with an approved concrete saw. The cut shall extend 2-1/2" below the surface of the gutter and curb. Sawed contraction joints shall have a maximum spacing of 10 ft. and be filled with a specified joint filler, such that the joint in the gutter section will be completely filled.  
 Pavement Grades shown on plans are for standard crown.

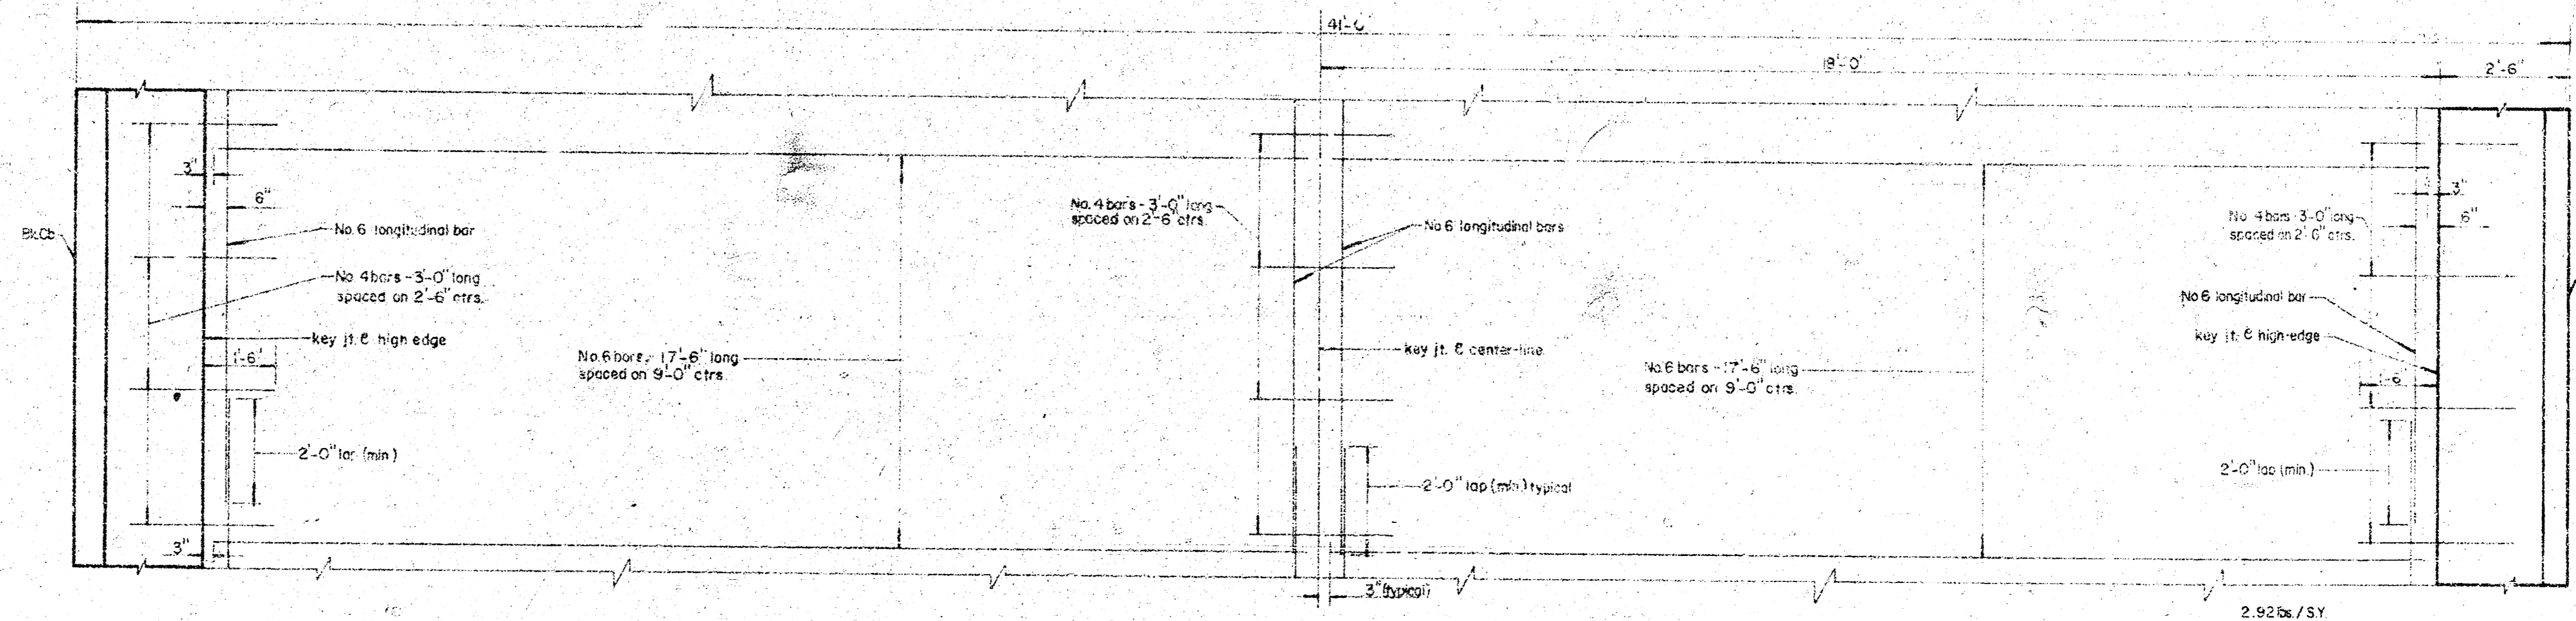

TYPICAL STEEL PATTERN  
 40'-0" ASPHALTIC CONCRETE PAVEMENT





