


32ND ST. N. E.L. FAIRVIEW TO W.L. PARK PLACE

33RD ST. N. E.L. WELLINGTON PLACE TO E.L. PARK PLACE

34TH ST. N. E.L. FAIRVIEW TO W.L. WELLINGTON PLACE

34TH ST. N. E.L. WELLINGTON PLACE TO W.L. PARK PLACE

N
SCALE 1" = 150'

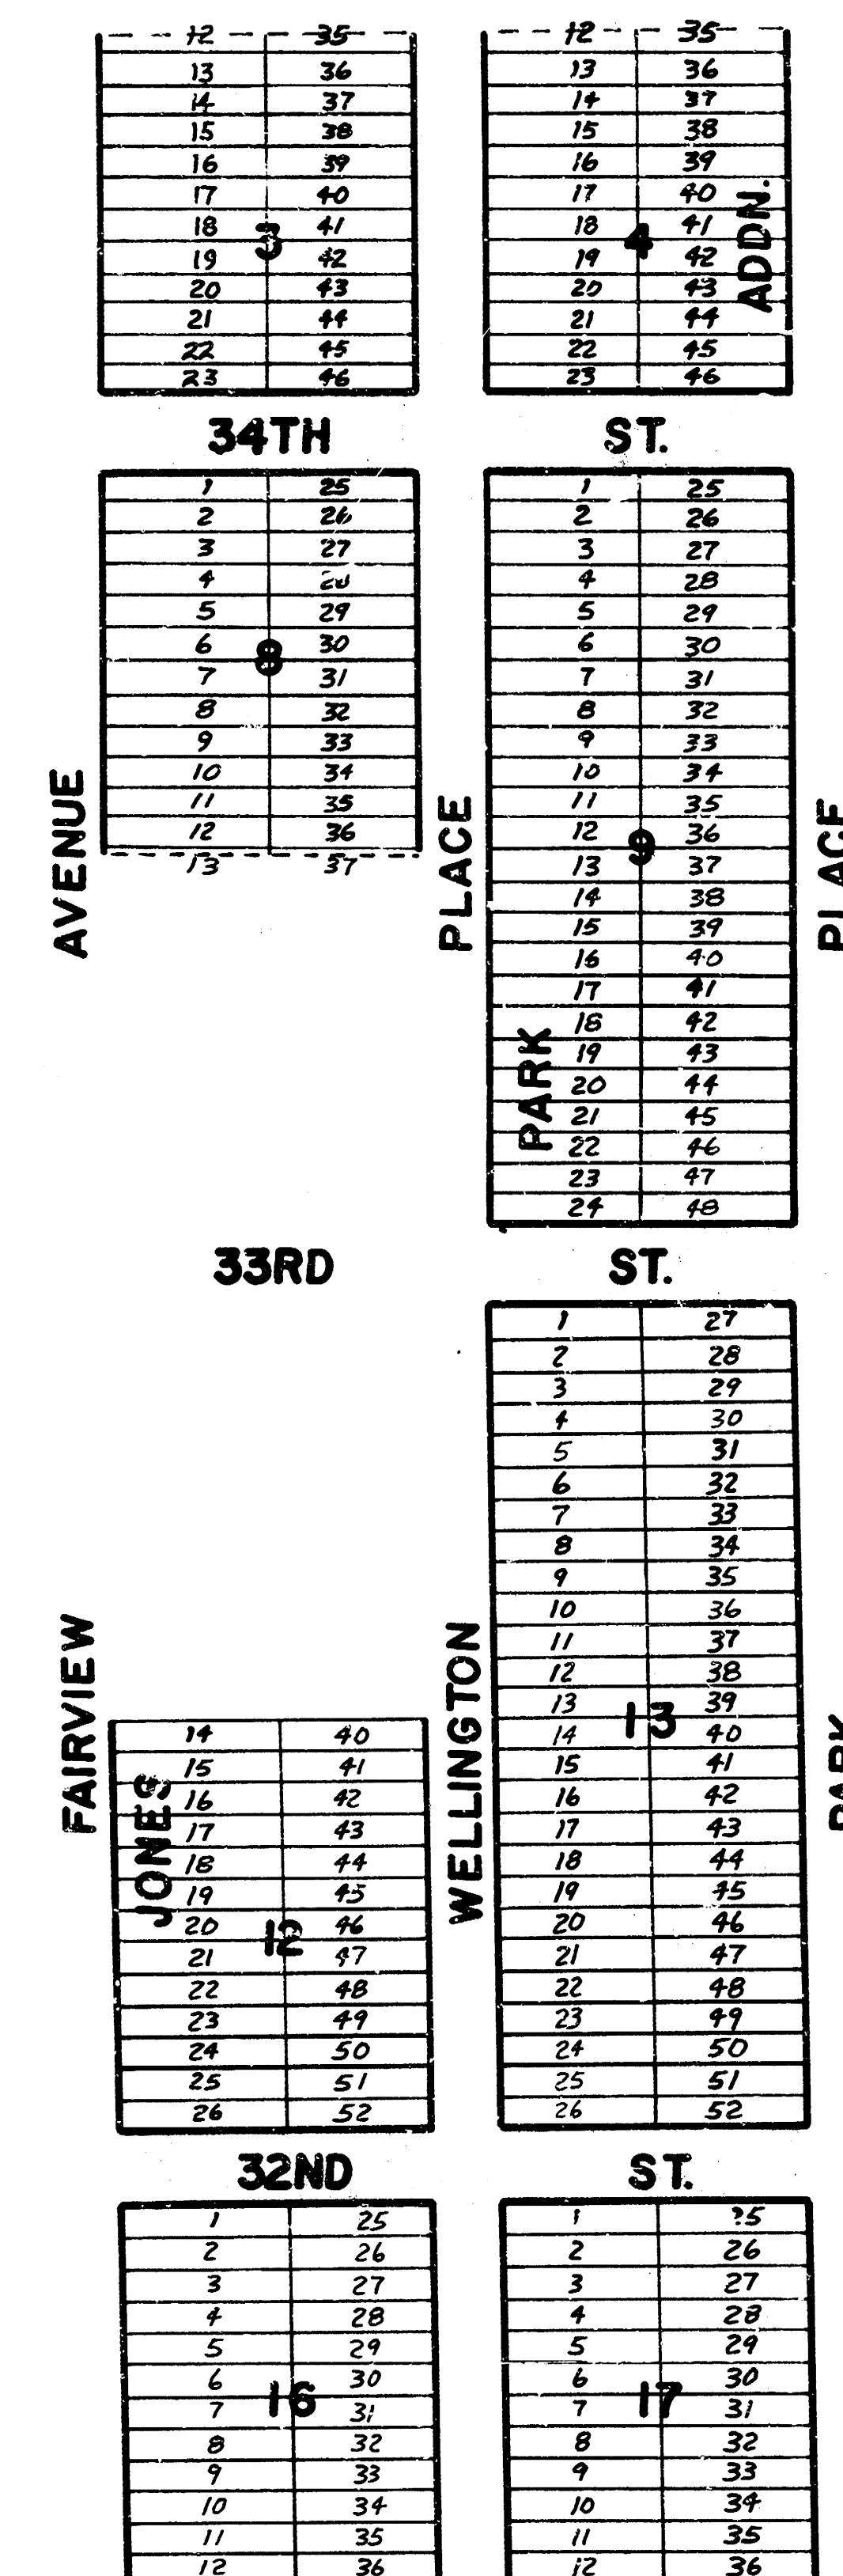

GENERAL NOTES:

- 1) CONSTRUCTION OF THIS PROJECT IS TO BE COORDINATED WITH THE CONSTRUCTION OF THE FOLLOWING PROJECTS:
1) PARK PLACE - S.L. 32ND TO S.L. 30TH, PROJECT NO. 472-76-245-81190-000-000-001.
2) WELLINGTON PLACE - S.L. 32ND TO S.L. 33RD, PROJECT NO. 472-76-245-81219-000-000-001.
3) WELLINGTON PLACE - S.L. 33RD TO S.L. 35TH, PROJECT NO. 472-76-245-81235-000-000-001.
- 2) TREES WITHIN THE LIMITS OF THIS PROJECT ARE TO BE REMOVED ONLY AT THE DIRECTION OF THE FIELD ENGINEER.
- 3) MAILBOXES WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND REPLACED AS APPROVED BY THE FIELD ENGINEER. THE CONTRACTOR WILL BE REQUIRED TO MAKE SATISFACTORY PROVISIONS FOR MAIL DELIVERY TO PROPERTIES AFFECTED BY THIS PROJECT DURING CONSTRUCTION.
- 4) ALL ENTRANCE AND CROSS-ROAD DRAINAGE PIPES WITHIN THE PROJECT LIMITS SHALL BE REMOVED BY THE CONTRACTOR. (THIS DOES NOT INCLUDE PIPE ON 33RD ST. NO. 1 EAST OF THE E.L. OF PARK PLACE, SAID PIPE BEING BEYOND THE OFFICIAL PROJECT LIMITS.)
- 5) FENCE REMAINING IN PUBLIC R.O.W. AT THE TIME OF CONSTRUCTION SHALL BE REMOVED AND SALVAGED BY CONTRACTOR AND GIVEN TO THE ADJACENT PROPERTY OWNERS. IN THE EVENT THAT THE PROPERTY OWNER DOES NOT WANT THE FENCE MATERIAL, THE CONTRACTOR SHALL DISPOSE OF SAME IN A MANNER ACCEPTABLE TO THE FIELD ENGINEER.


INDEX		
TITLE SHEET	PAGE	1
TYPICALS	PAGES	2-3
32ND ST. - E.L. FAIRVIEW TO W.L. PARK PLACE	PAGE	4
33RD ST. - E.L. WELLINGTON PLACE TO E.L. PARK PLACE	PAGE	5
34TH ST. - E.L. FAIRVIEW TO W.L. WELLINGTON PLACE	PAGE	6
34TH ST. - E.L. WELLINGTON PLACE TO W.L. PARK PLACE	PAGE	6
X-SECTIONS	PAGES	7-11
MANHOLE ADJUSTMENT DETAIL	PAGE	12



PROJECT NO. 472-76-245-81328-000-000-001
CITY OF WICHITA M. E. LINDEBAK CITY ENGINEER
LANDCO ENGINEERING CONSULTANT ENGINEER

TYPICAL 31' PAVEMENT DETAILS


(32nd Street N. and 34th Street N.)

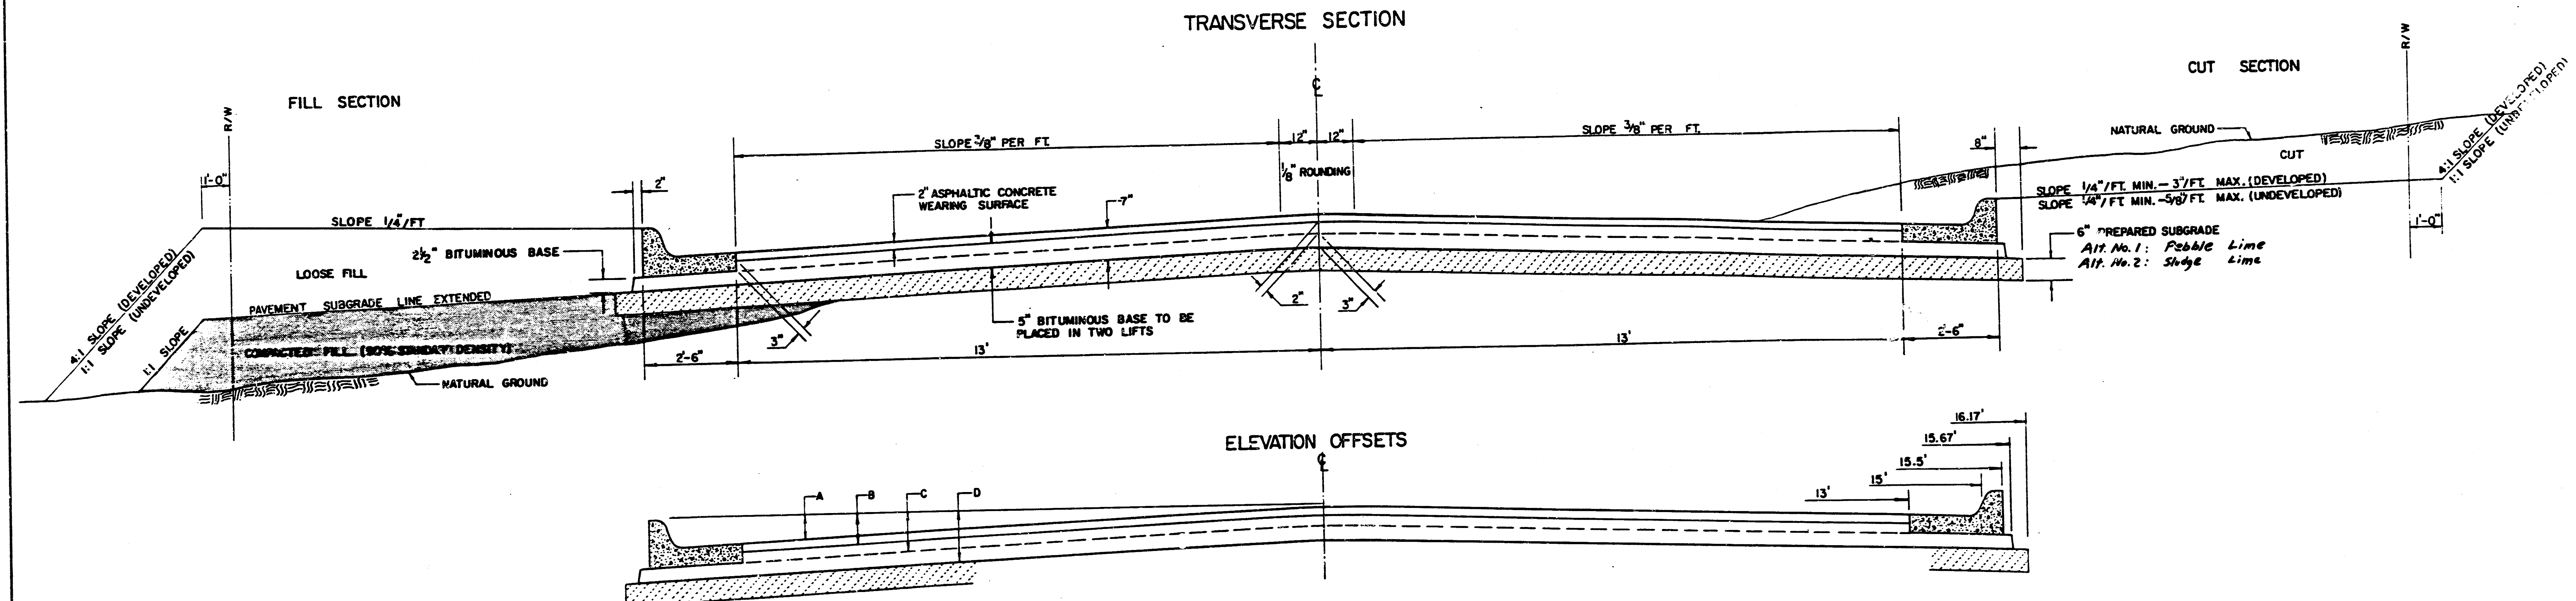


ELEVATION OFFSETS

	DISTANCE FROM CENTERLINE (LT. & RT.)											
	0'	2'	4'	6'	7.5'	10'	12'	13'	15'	15.5'	15.67'	16.17'
A: TOP OF CURBS TO TOP OF SURFACE LIFT	0.10	0.14	0.21	0.27	0.32	0.39	0.46	0.49	—	—	—	—
B: TOP OF CURBS TO TOP OF UPPER BASE LIFT	0.27	0.31	0.38	0.44	0.49	0.56	0.63	0.66	—	—	—	—
C: TOP OF CURBS TO TOP OF LOWER BASE LIFT	0.44	0.49	0.57	0.64	0.70	0.79	0.87	0.90	0.98	1.00	1.00	—
D: TOP OF CURBS TO TOP OF SUBGRADE	0.69	0.73	0.80	0.87	0.93	1.01	1.08	1.12	1.19	1.21	1.21	1.23

COMBINED CURB & GUTTER

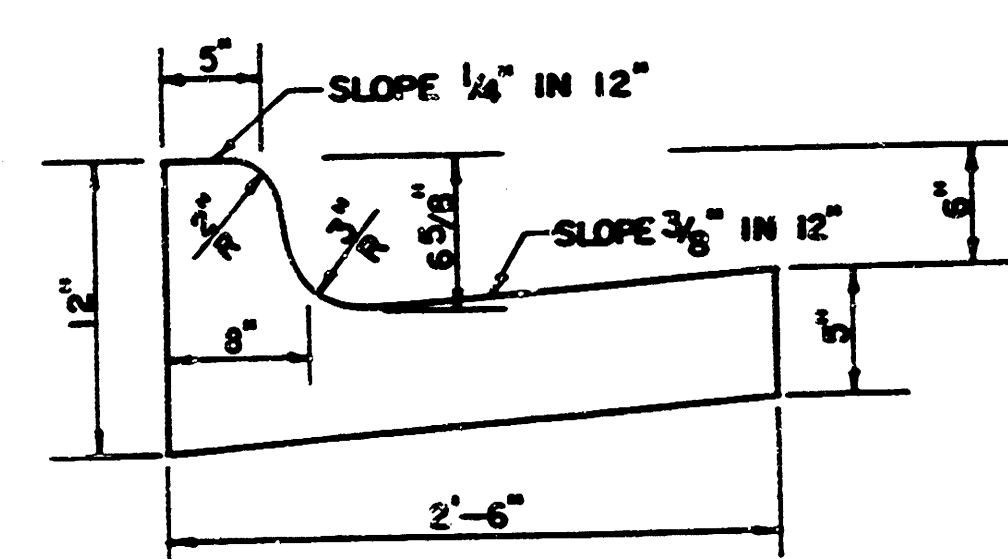


ROLL TYPE COMBINED CURB & GUTTER

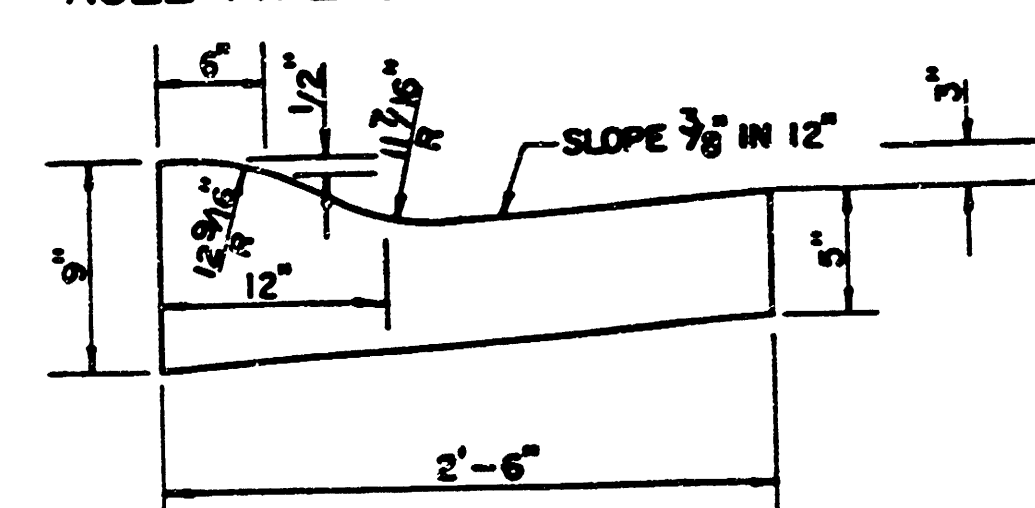

GENERAL NOTES

- 1) THE ASPHALTIC CONCRETE PAVEMENT BETWEEN THE COMBINED CURB AND GUTTER SHALL BE PAID AS SQUARE YARDS OF 7" ASPHALTIC CONCRETE (5" BITUMINOUS BASE).
- 2) THE BITUMINOUS BASE UNDER AND BEHIND THE COMBINED CURB AND GUTTER SHALL BE PAID AS SQUARE YARDS OF 2 1/2" BITUMINOUS BASE.
- 3) A TACK COAT OF EMULSIFIED ASPHALT (SC-1H OR CSS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE OF 0.05 GALLONS PER SQUARE YARD BETWEEN EACH LIFT OF ASPHALTIC MATERIAL.
- 4) BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC CONTROLS FOR LINE AND GRADE.
- 5) CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF ONE (1) FOOT FROM JOINTS IN PRECEDING LIFTS AND PLACED SO THAT A JOINT WILL BE CONSTRUCTED ON THE CENTERLINE OF THE TOP LIFT.
- 6) CONTRACTOR TO BID ONLY ONE SUBGRADE TREATMENT ALTERNATE WHEN ALTERNATES ARE PROVIDED IN THE PROPOSAL AND CONTRACT. THE ALTERNATE CHOSEN BY THE SUCCESSFUL BIDDER SHALL BE USED IN CONSTRUCTING THIS PROJECT.

TRANSVERSE CONSTRUCTION JOINTS

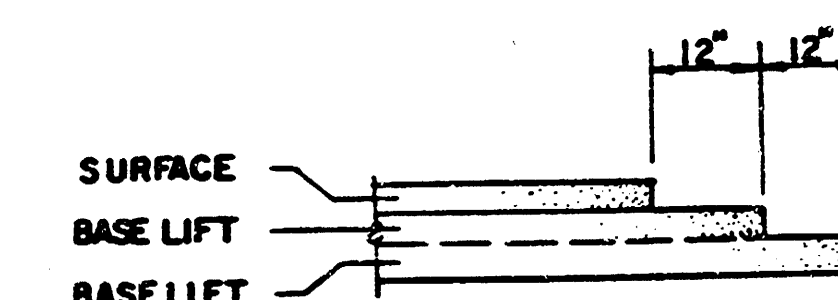


TRANSVERSE CONSTRUCTION JOINTS SHALL BE CONSTRUCTED IN FLEXIBLE BASE PAVEMENTS AT LOCATIONS WHERE PAVEMENT JOINS EXISTING FLEXIBLE BASE PAVEMENT AS SHOWN BY THE DETAIL. ALL COSTS ASSOCIATED WITH THE CONSTRUCTION OF THE TRANSVERSE JOINT SHALL BE INCLUDED IN THE BID PRICE FOR SQUARE YARDS 7" ASPHALTIC CONCRETE (5" BITUMINOUS BASE).

7 INCH RESIDENTIAL ASPHALTIC CONCRETE
PAVEMENT WITH 5 INCH BITUMINOUS BASE
CITY OF WICHITA, KANSAS
PROJECT NUMBER
472-76-245-81328-000-000-001


TYPICAL 31' PAVEMENT DETAILS

(33rd St. N.)

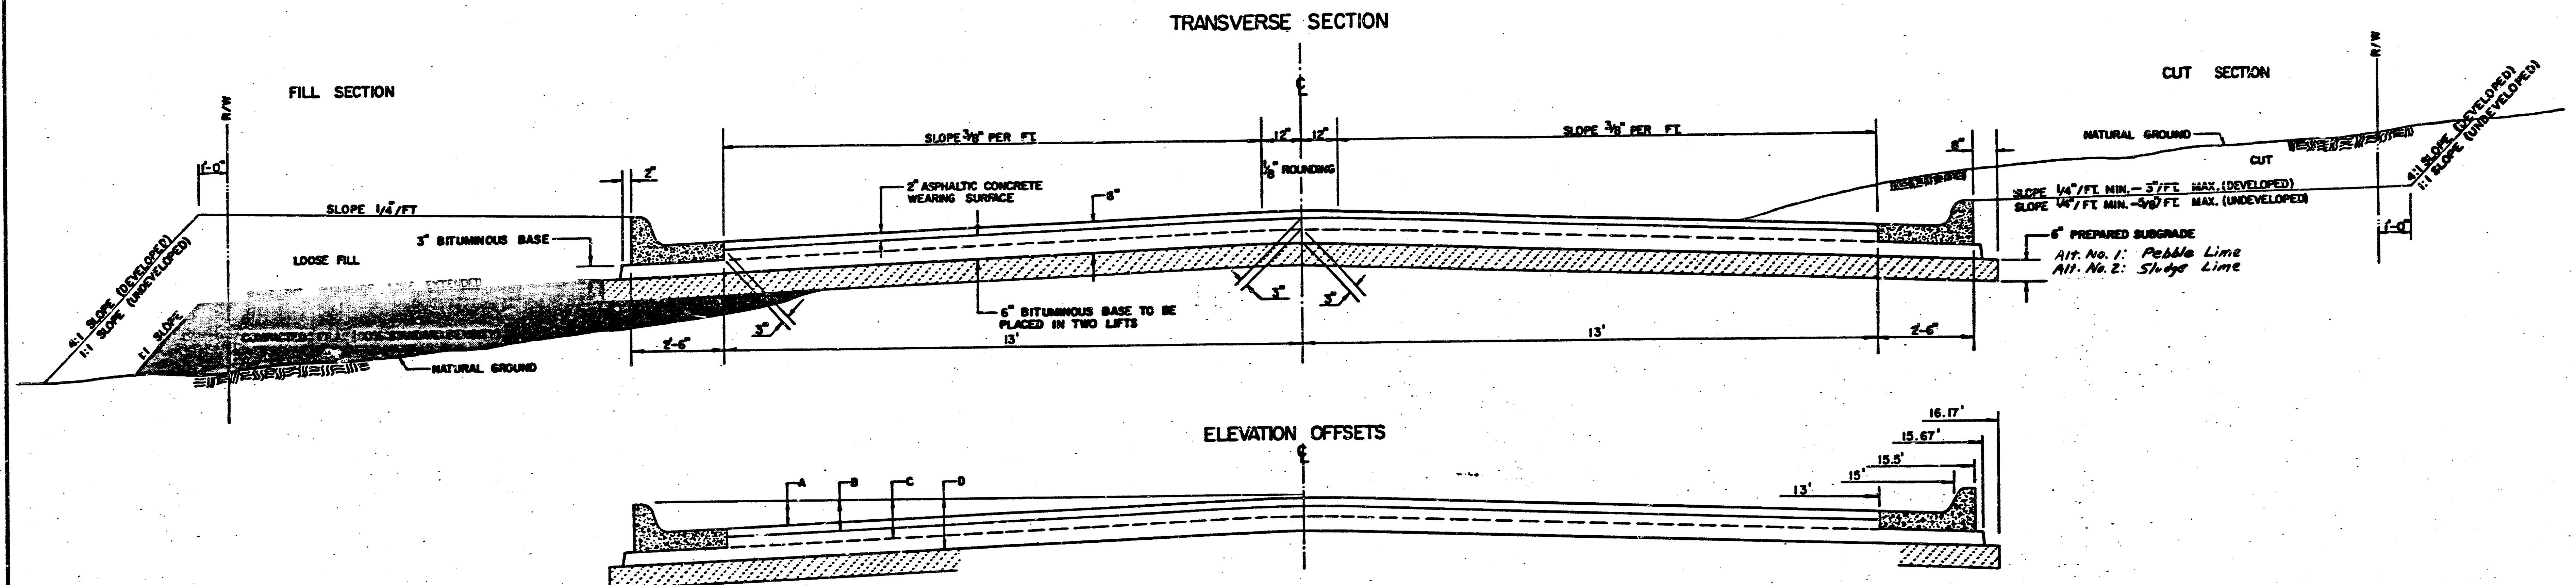


	DISTANCE FROM CENTERLINE (LT. & RT.)											
	0'	2'	4'	6'	7.5'	10'	12'	15'	15.5'	15.67'	15.67'	16.17'
A: TOP OF CURBS TO TOP OF SURFACE LIFT	.10	.14	.21	.27	.32	.39	.46	.48	—	—	—	—
B: TOP OF CURBS TO TOP OF UPPER BASE LIFT	.27	.31	.37	.44	.48	.56	.62	.65	—	—	—	—
C: TOP OF CURBS TO TOP OF LOWER BASE LIFT	.52	.56	.62	.69	.73	.81	.87	.90	.97	.98	.99	—
D: TOP OF CURBS TO TOP OF SUBGRADE	.77	.81	.87	.94	.98	1.06	1.12	1.15	1.22	1.23	1.24	1.25

COMBINED CURB & GUTTER

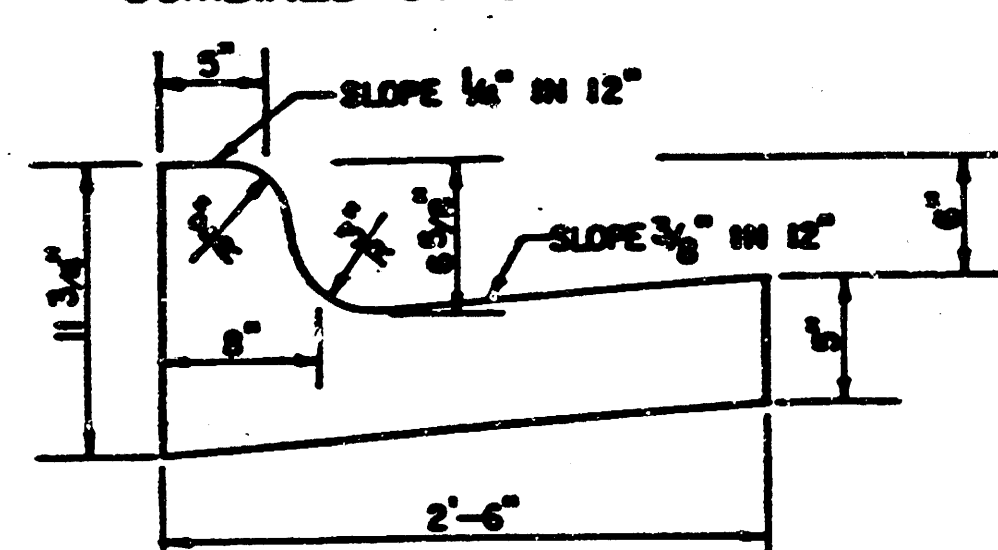


ROLL TYPE COMBINED CURB & GUTTER

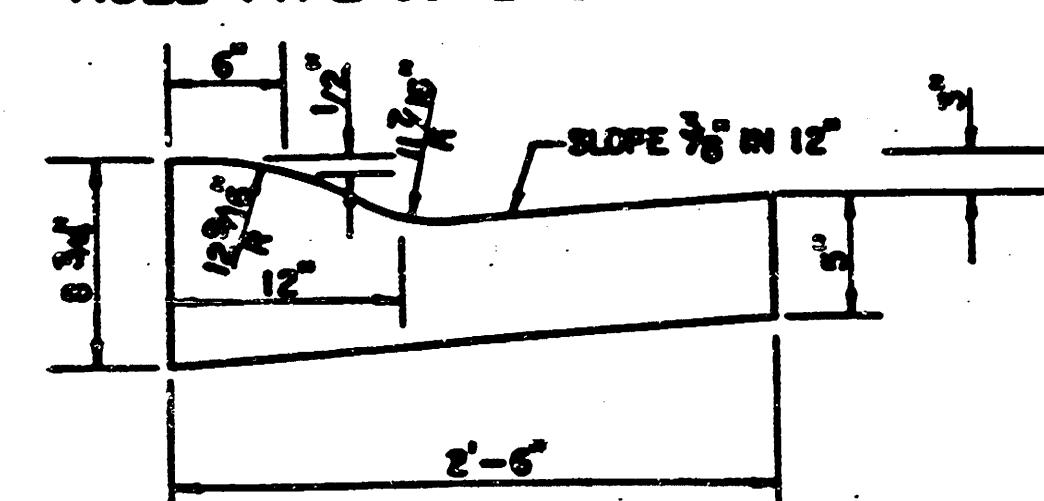

GENERAL NOTES

- 1) THE ASPHALTIC CONCRETE PAVEMENT BETWEEN THE COMBINED CURB AND GUTTER SHALL BE PAID AS SQUARE YARDS OF " ASPHALTIC CONCRETE (6" BITUMINOUS BASE).
- 2) THE BITUMINOUS BASE UNDER AND BEHIND THE COMBINED CURB AND GUTTER SHALL BE PAID AS SQUARE YARDS OF " BITUMINOUS BASE.
- 3) A TACK COAT OF EMULSIFIED ASPHALT (SC-1H OR CSS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE OF 0.05 GALLONS PER SQUARE YARD BETWEEN EACH LIFT OF ASPHALTIC MATERIAL.
- 4) BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC CONTROLS FOR LINE AND GRADE.
- 5) CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF ONE (1) FOOT FROM JOINTS IN PRECEDING LIFTS AND PLACED SO THAT A JOINT WILL BE CONSTRUCTED ON THE CENTERLINE OF THE TOP LIFT.
- 6) CONTRACTOR TO BID ONLY ONE SUBGRADE TREATMENT ALTERNATE WHEN ALTERNATES ARE PROVIDED IN THE PROPOSAL AND CONTRACT. THE ALTERNATE CHOSEN BY THE SUCCESSFUL BIDDER SHALL BE USED IN CONSTRUCTING THIS PROJECT.

TRANSVERSE CONSTRUCTION JOINTS

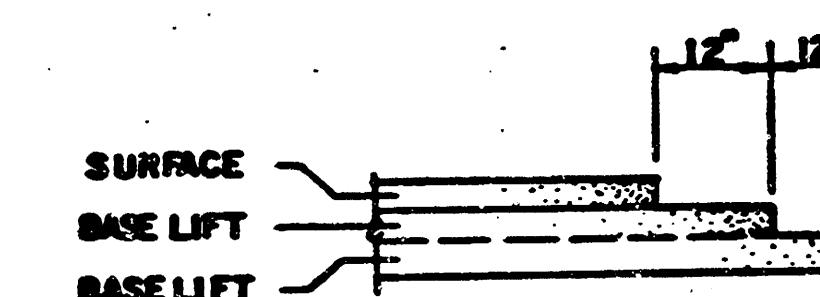


TRANSVERSE CONSTRUCTION JOINTS SHALL BE CONSTRUCTED IN FLEXIBLE BASE PAVEMENTS AT LOCATIONS WHERE PAVEMENT JOINTS EXISTING FLEXIBLE BASE PAVEMENT AS SHOWN BY THE DETAIL. ALL COSTS ASSOCIATED WITH THE CONSTRUCTION OF THE TRANSVERSE JOINT SHALL BE INCLUDED IN THE BID PRICE FOR SQUARE YARDS 8" ASPHALTIC CONCRETE (6" BITUMINOUS BASE).

8 INCH RESIDENTIAL ASPHALTIC CONCRETE
PAVEMENT WITH 6 INCH BITUMINOUS BASE
CITY OF WICHITA, KANSAS
472-76-245-81326-000-000-001 3/12

B.M. 130.34 SE corner Porch @ 234 W.
 32nd St. N. RR Spk. W. Face PP @ S.E.
 Corner Park Place & 32nd St.
 B.M. 126.90 "x" on S-end return, S.W.
 corner 32nd & Wellington Place

THE CONTRACTOR SHALL BE RESPONSIBLE
 FOR PRESERVING PROPERTY IRONS. THE
 CONTRACTOR SHALL BE REQUIRED TO RE-
 ESTABLISH ANY PROPERTY IRONS WHICH
 ARE DAMAGED OR DESTROYED. IN HIS CON-
 STRUCTION OPERATIONS. SUCH IRONS SHALL
 BE RE-ESTABLISHED BY A LICENSED LAND
 SURVEYOR OR A LICENSED PROFESSIONAL
 ENGINEER IN ACCORDANCE WITH STATE LAWS.

SCALE 1" = 20'

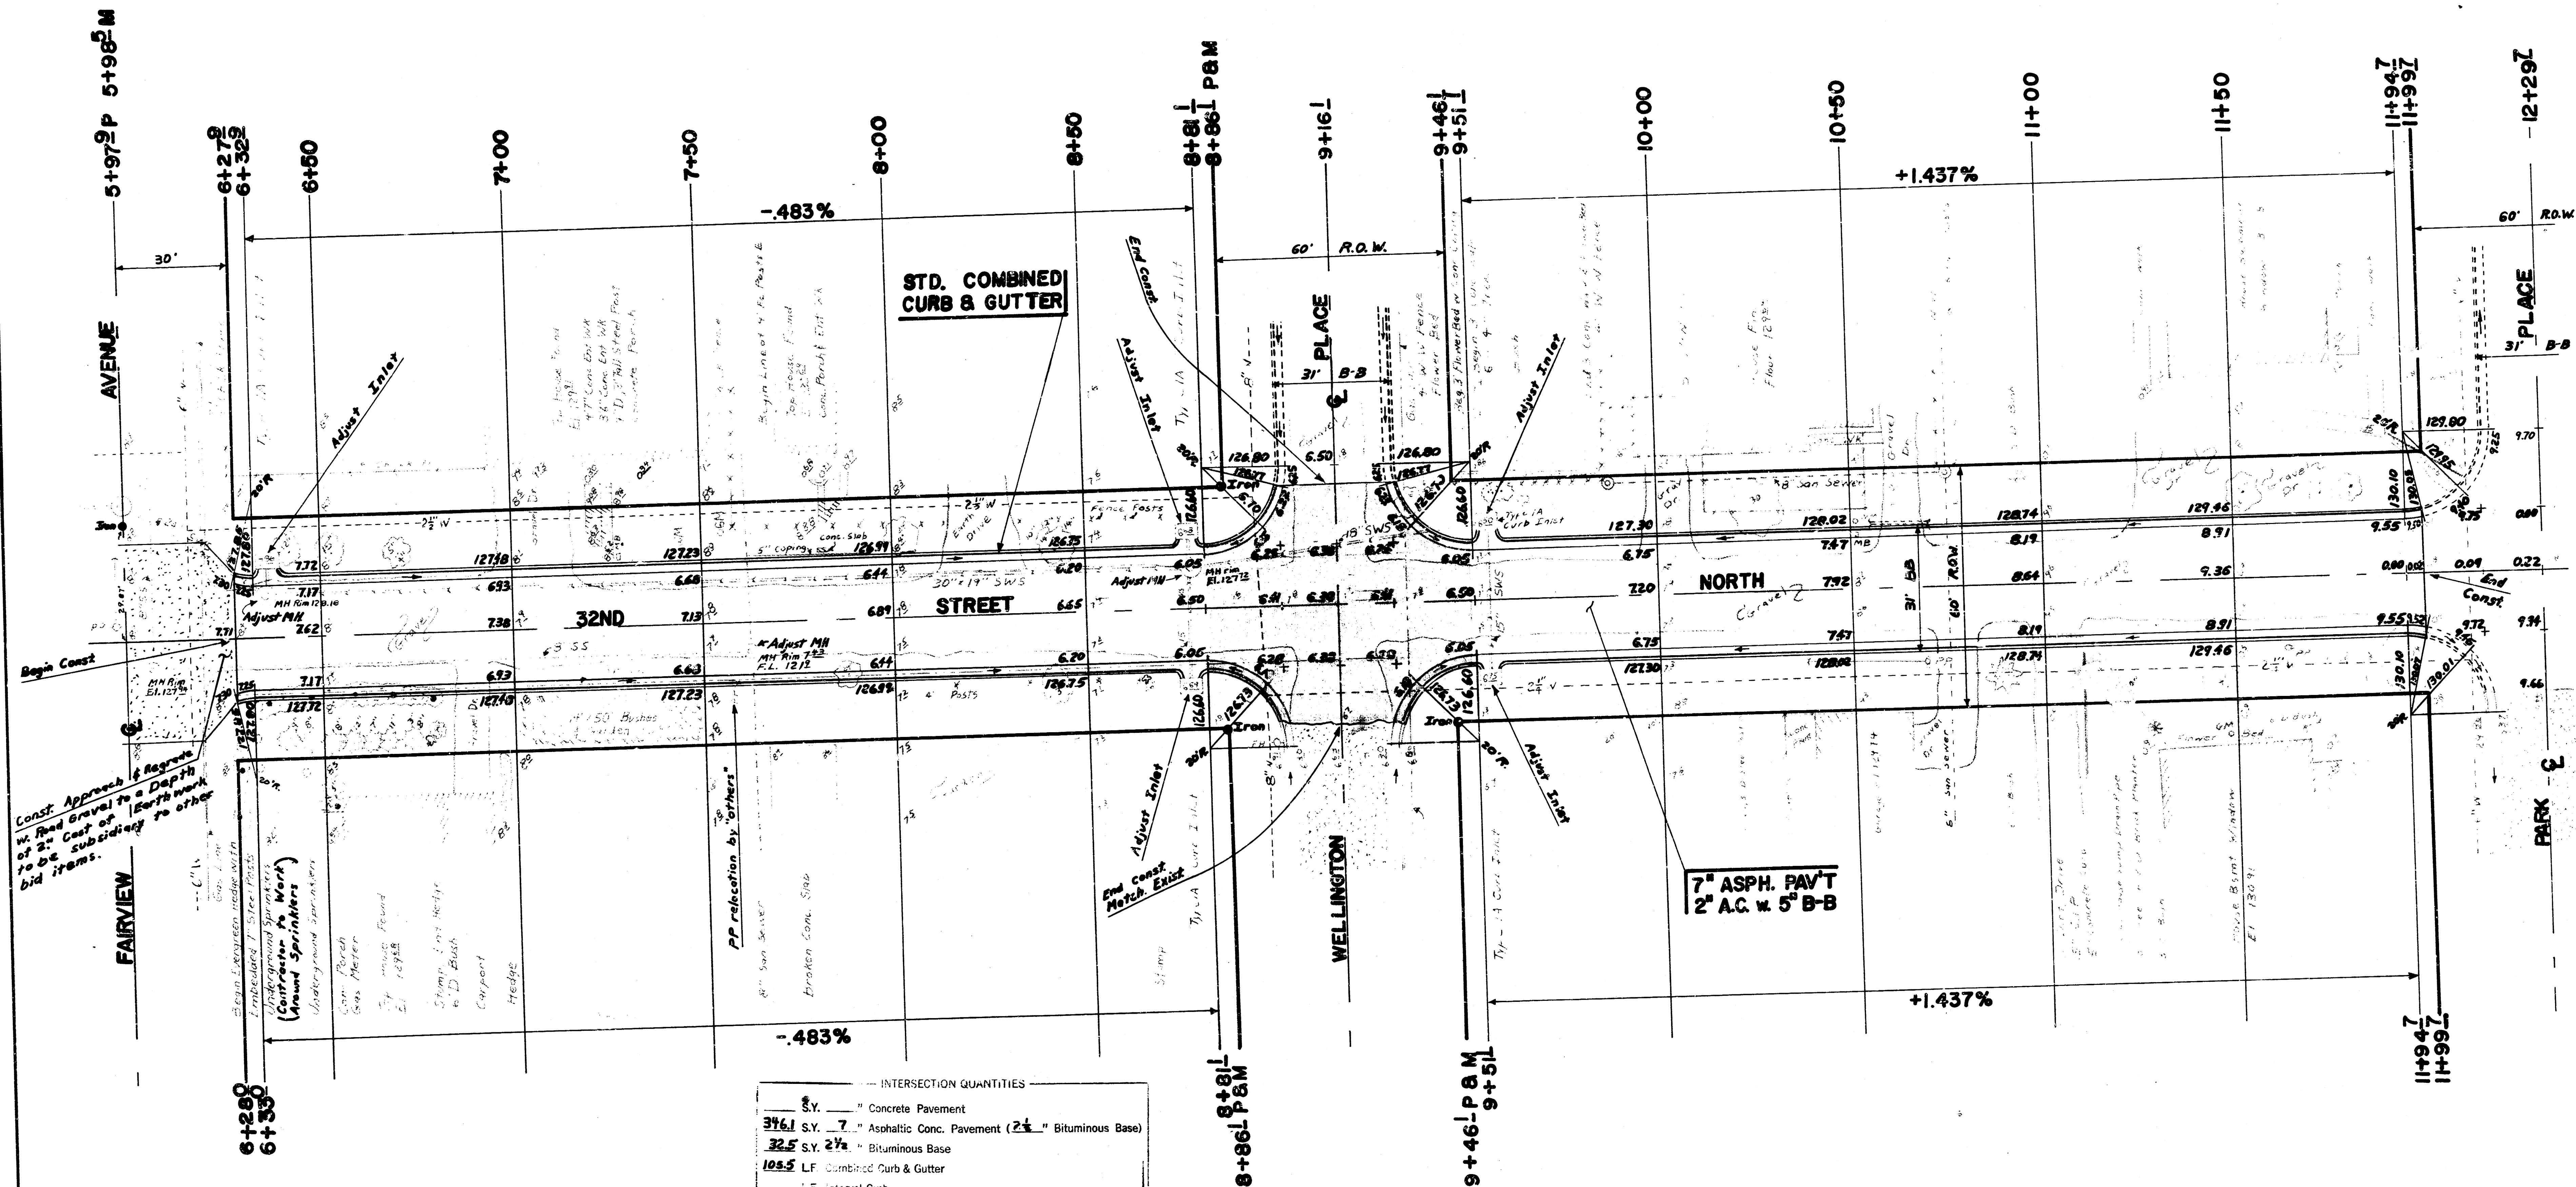

INTERSECTION QUANTITIES

316.1 S.Y.	7"	Concrete Pavement
32.5 S.Y.	2 1/2"	Asphaltic Conc. Pavement (2 1/4" Bituminous Base)
109.5 S.Y.	2 1/2"	Bituminous Base
		1" Integral Curb
		6" 4" Wheelchair Ramp
		6" 1" Walk
200.9 S.Y.		Excavation
		C.Y. Co. Filled Fill
		Lbs. Reinforcing Steel
301.2 S.Y.		Manhole
		Tons Lbs. or Cement
		S.Y. M.C. Concrete & Asphaltic Concrete

Actual Excavation	3,037 CY
+10%	304 CY
Total	3,341 CY
Manipulation	5808 S.Y.

ALL ASPHALT MAT REMOVED TO BE SUBSIDIARY
 TO EXCAVATION




32ND ST. N. - E.L. FAIRVIEW TO W.L. PARK PLACE
 PROJECT NO. 472-76-245-81328-000-000-001
 CITY OF WICHITA M. E. LINDEBAK CITY ENGINEER
 LANDCO ENGINEERING CONSULTANT ENGINEER
 BOOK BR46 DRAWN BY RH DATE 6/84

FILMED FROM THE BEST
 AVAILABLE COPY

BM. 129.30 RR Sph. NE Face PP SW corner
Wellington Place & 33rd
BM. 129.58 RR Sph. W-Face PP SE corner
Park Place & 33rd

N
SCALE 1" = 20'

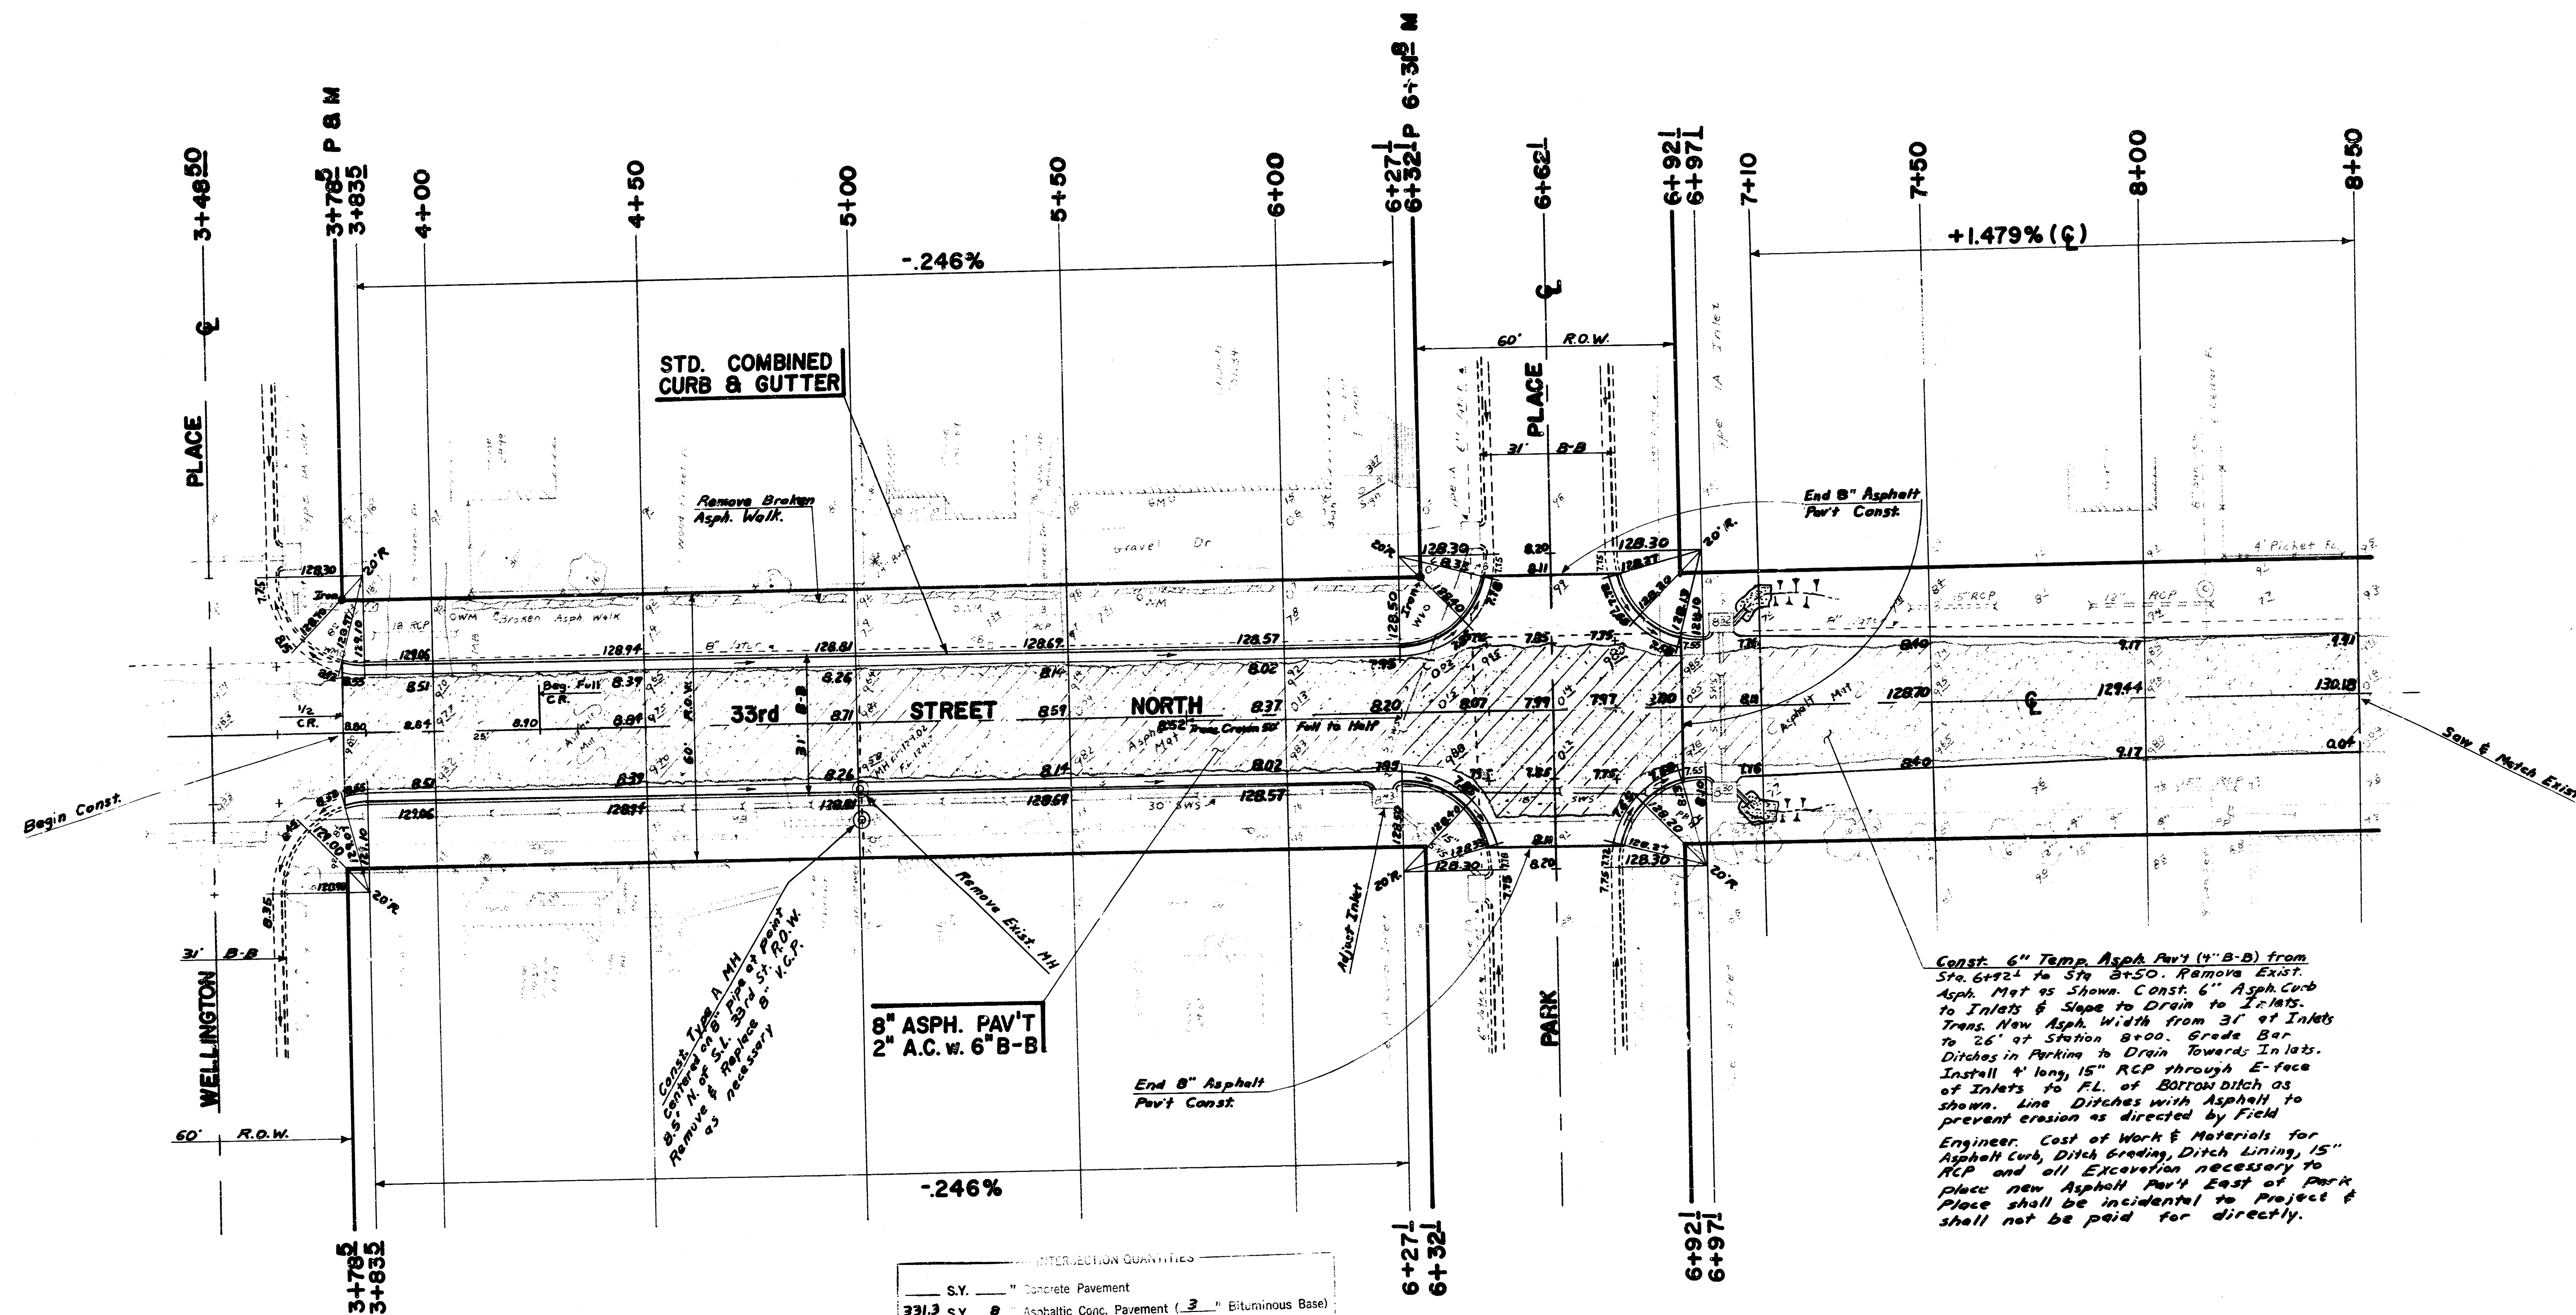

INTERSECTION QUANTITIES

331.3	S.Y.	Concrete Pavement
231.5	S.Y.	Asphaltic Conc. Pavement (2\"/>


Const. 6\"/>



33RD ST. N. - E.L. WELLINGTON PLACE TO E.L. PARK PLACE
PROJECT NO. 472-76-245-61328-000-000-001
CITY OF WICHITA M. E. LINDEBAK CITY ENGINEER
LANDCO ENGINEERING CONSULTANT ENGINEER
BOOK BR16 DRAWN BY RH DATE 6/84

B.M. 128.00 "4" at N-end return NE
 Corner Fairview & 34th St.
 B.M. 131.34 Bridge Spk. N-face P.P. @ S.E.
 Corner Wellington Place & 34th St.
 B.M. 131.01 R.R. Spk. E-face P.P. @ S.W.
 Corner Park Place & 34th St.

N
 SCALE 1" = 20'

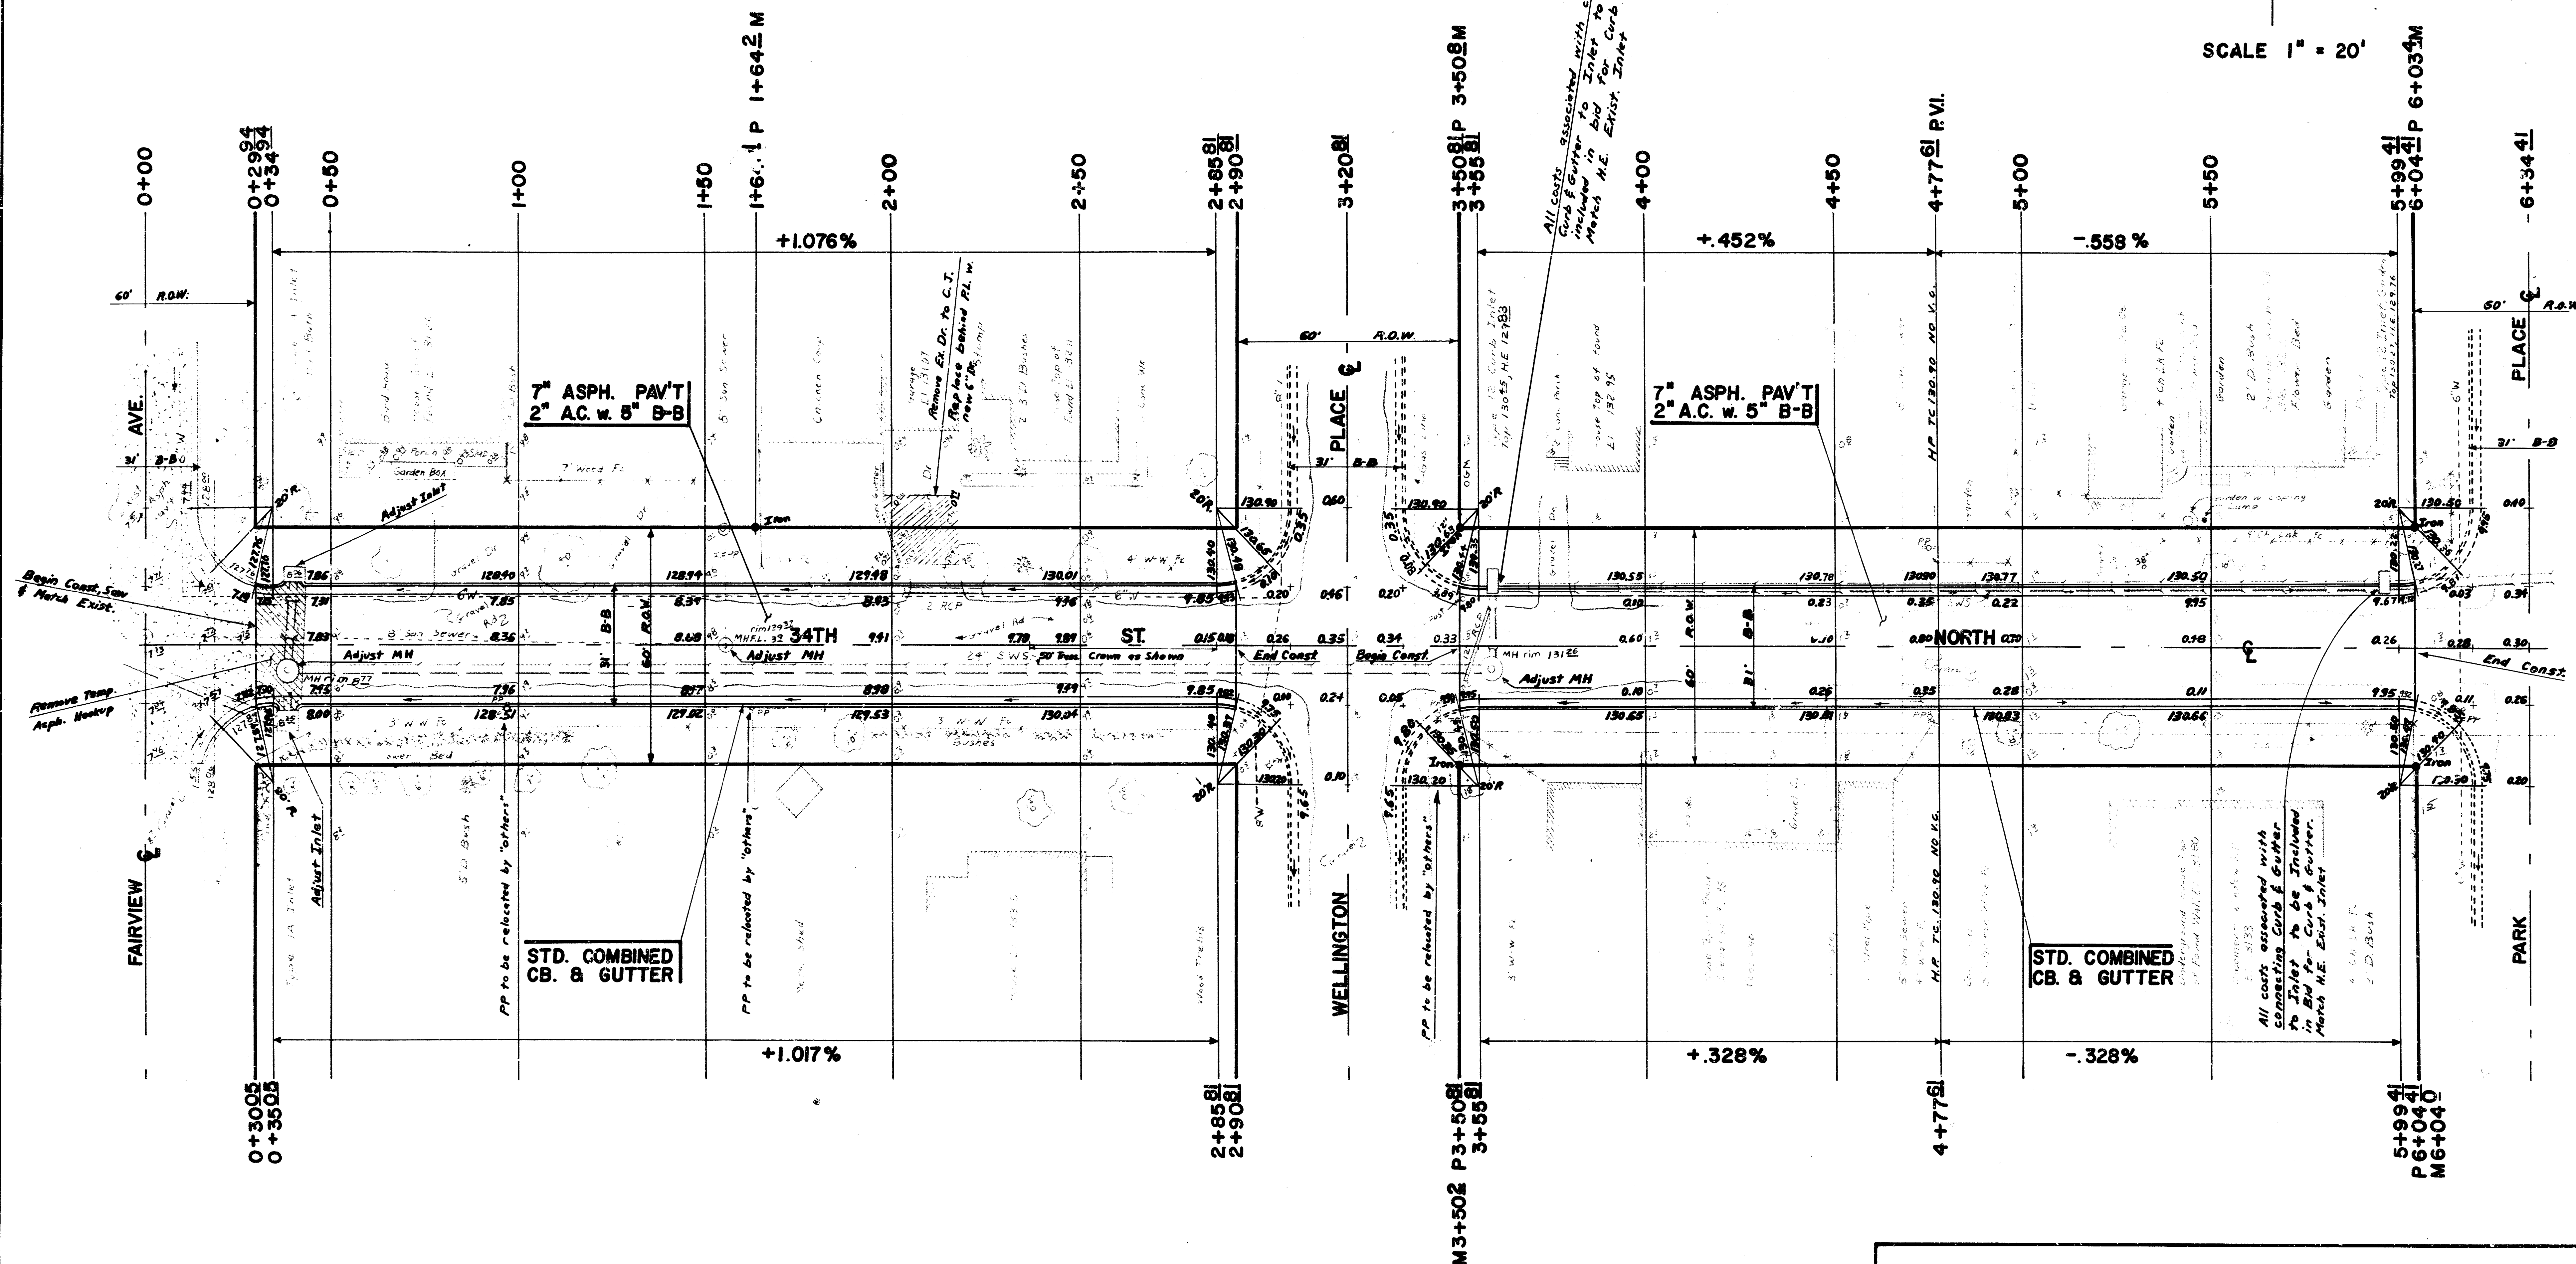


34TH ST. N. - E.L. FAIRVIEW TO W.L. WELLINGTON PLACE
 34TH ST. N. - E.L. WELLINGTON PLACE TO W.L. PARK PLACE
 PROJECT NO. 472-76-245-81328-000-000-001
 CITY OF WICHITA M. E. LINDEBAK CITY ENGINEER
 LANDCO ENGINEERING CONSULTANT ENGINEER
 BOOK 3R48B DRAWN BY RH DATE 6/84

FILMED FROM THE BEST
 AVAILABLE COPY....


130

125

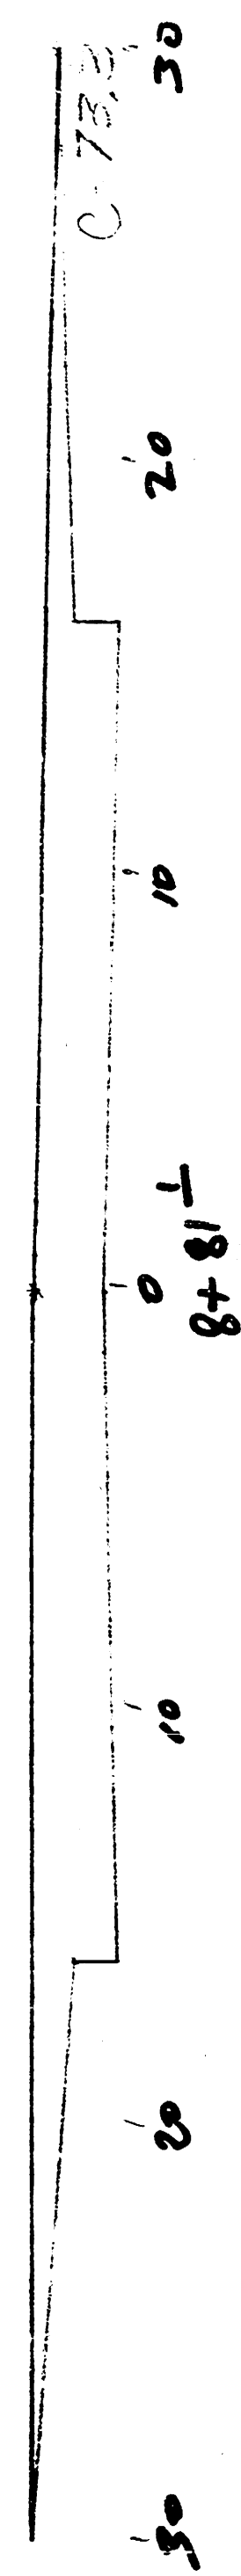


130

125

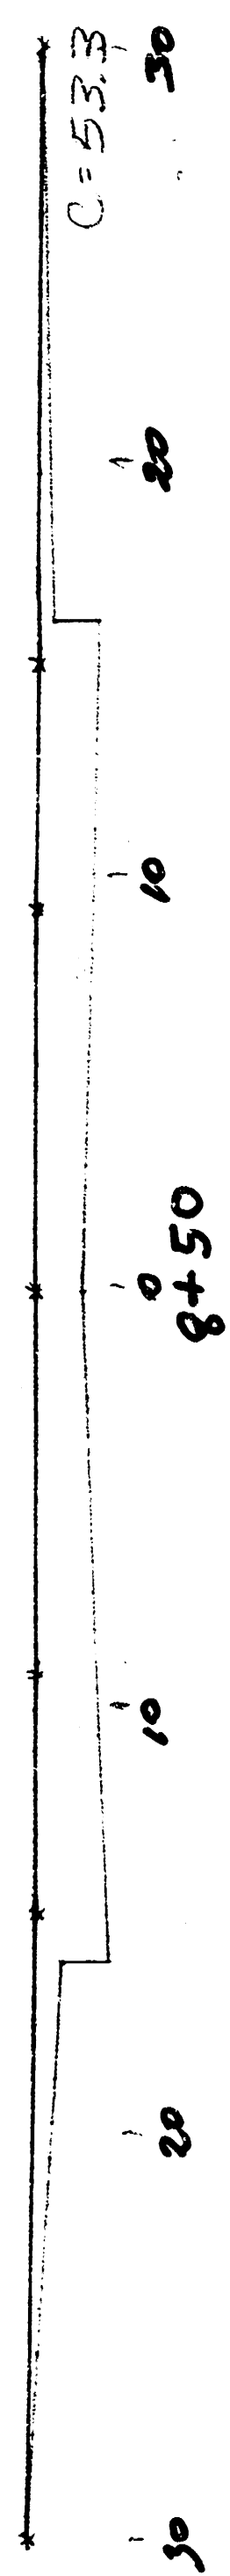


130

125

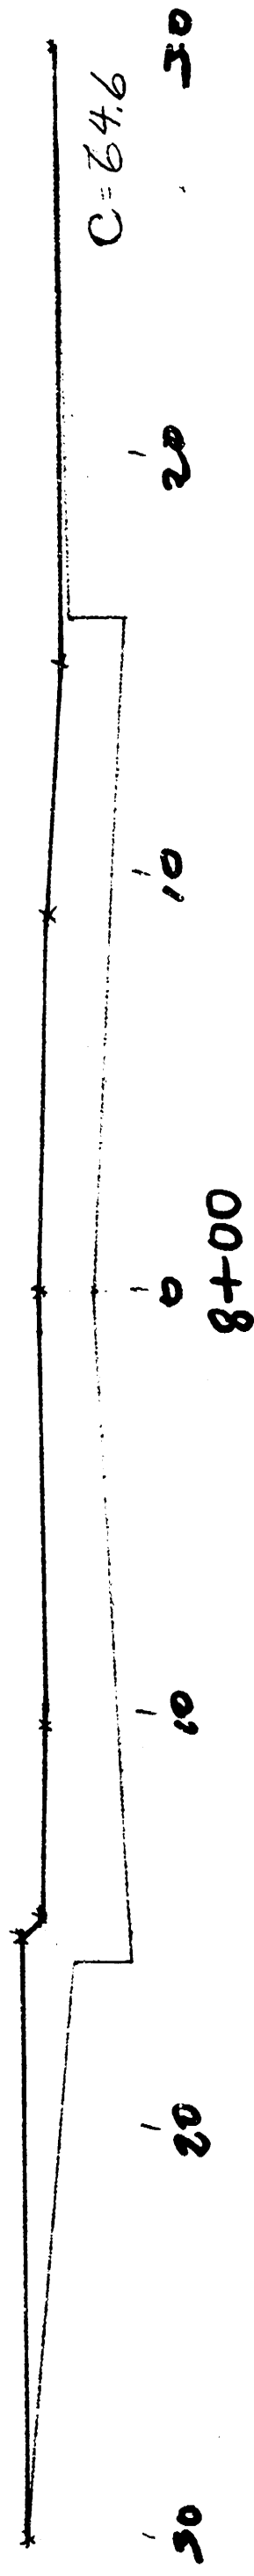


130

125

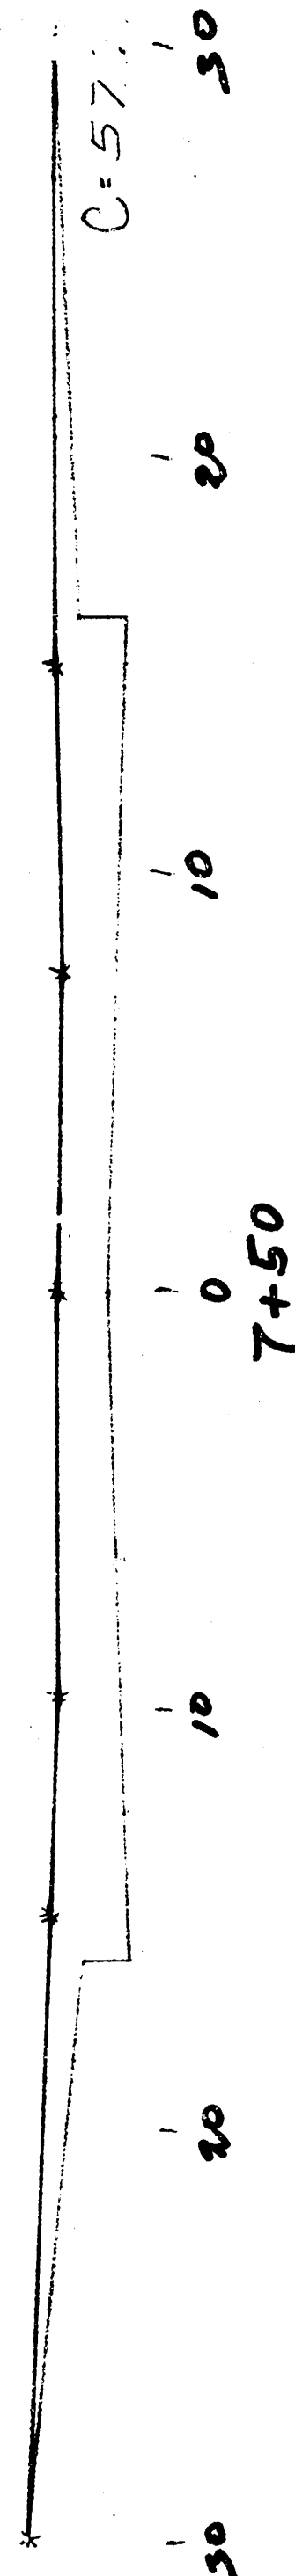


130

125

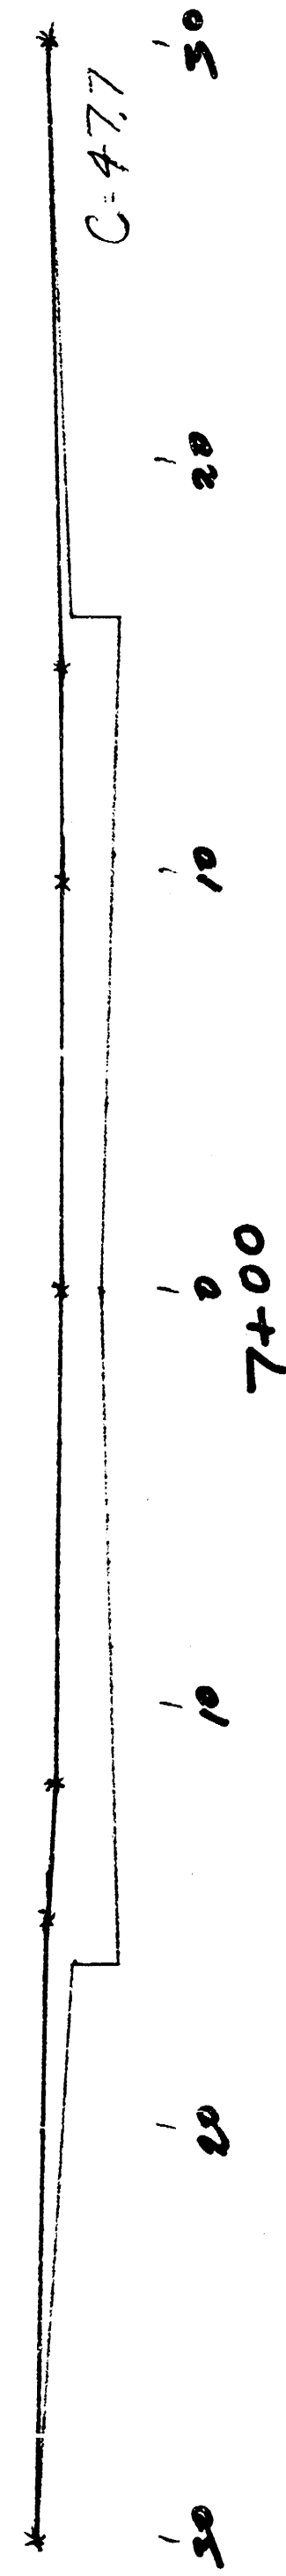


130

125

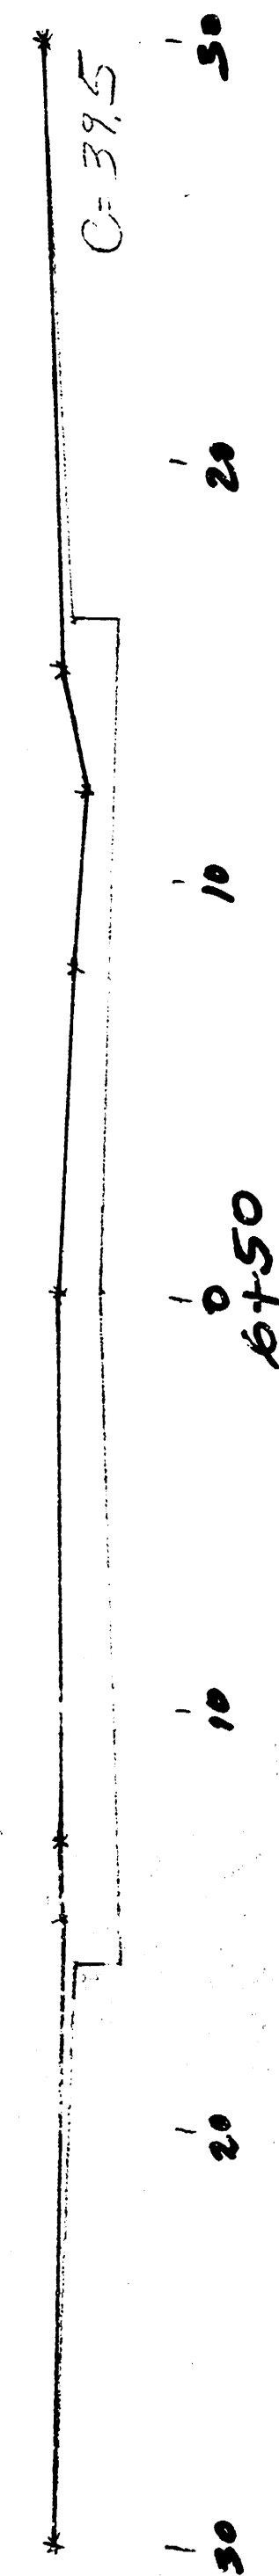

130

125

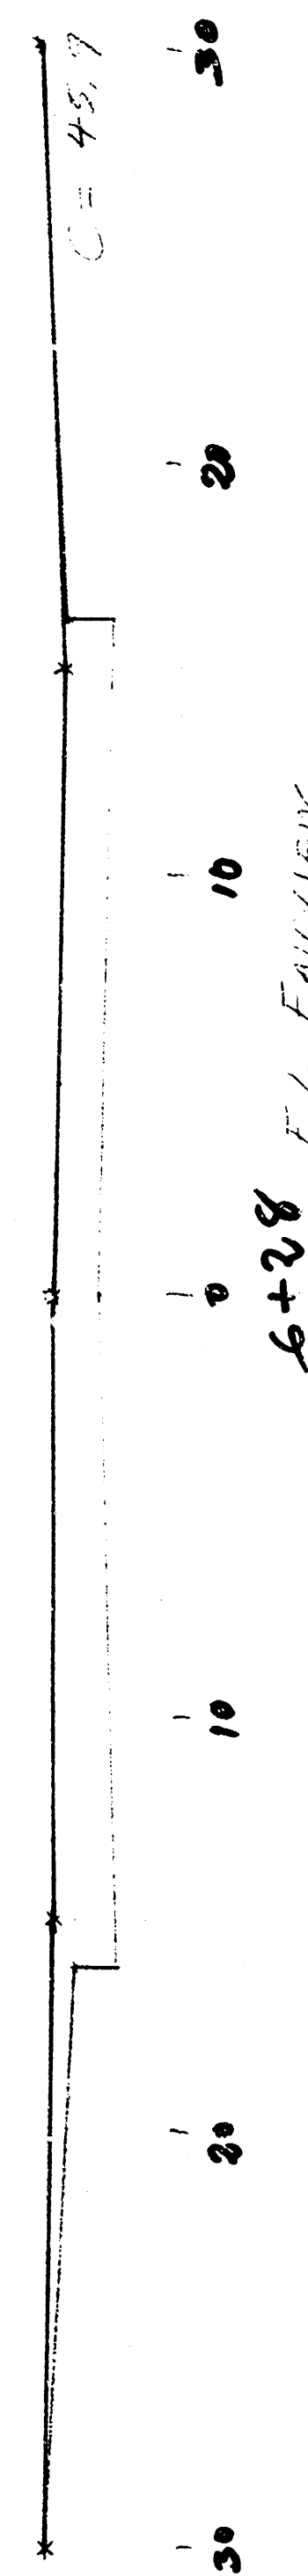

FILMED FROM THE BEST
AVAILABLE COPY

32nd St N - E.L. Fairview
to W.L. Park Place
472-78-245-81328-000-001


Sheet Total 618.5 C.V. E.L.

Total at 125
SHEETS 2037.2 C.V. E.L.

712


130

125

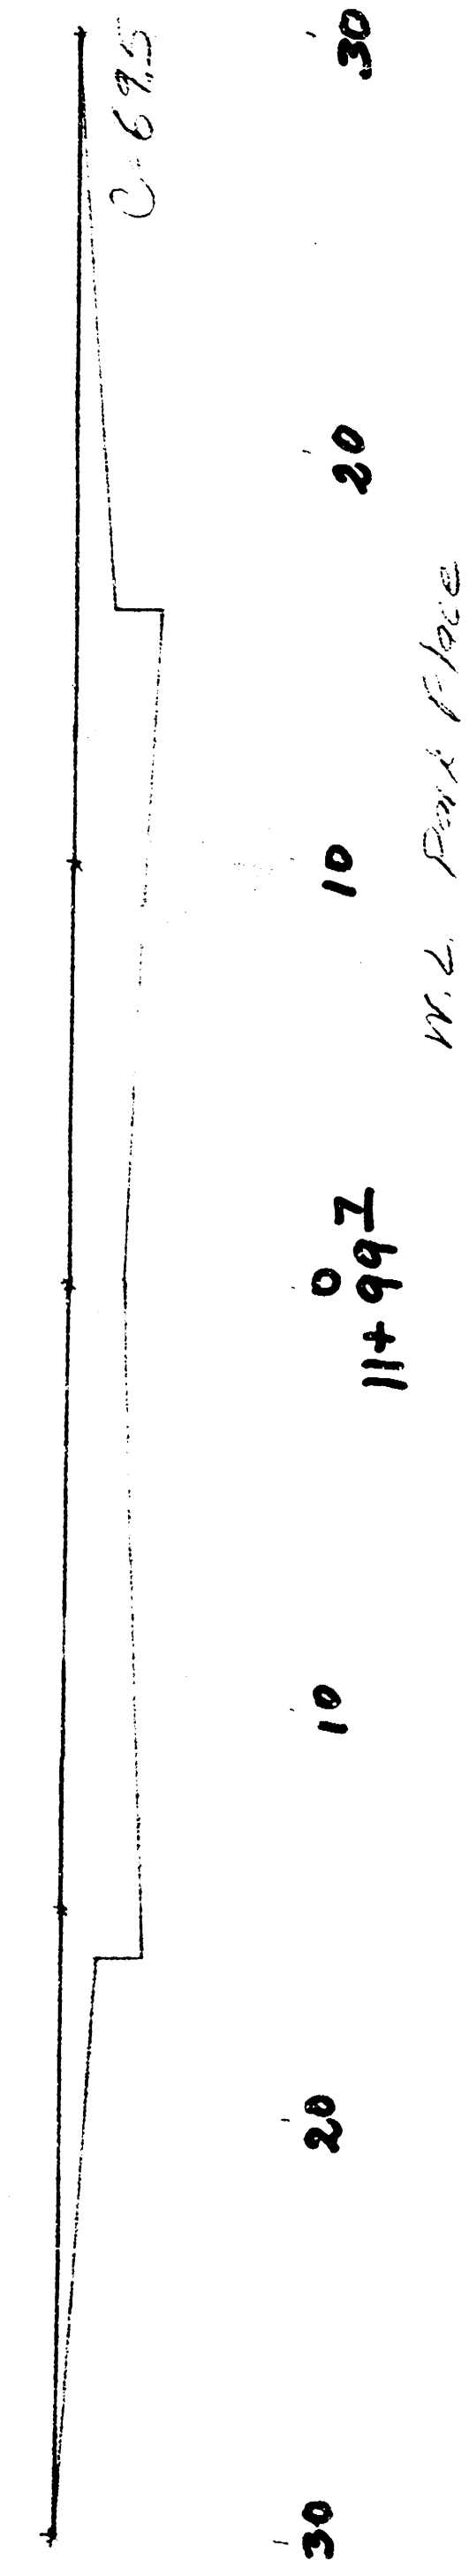


130

125

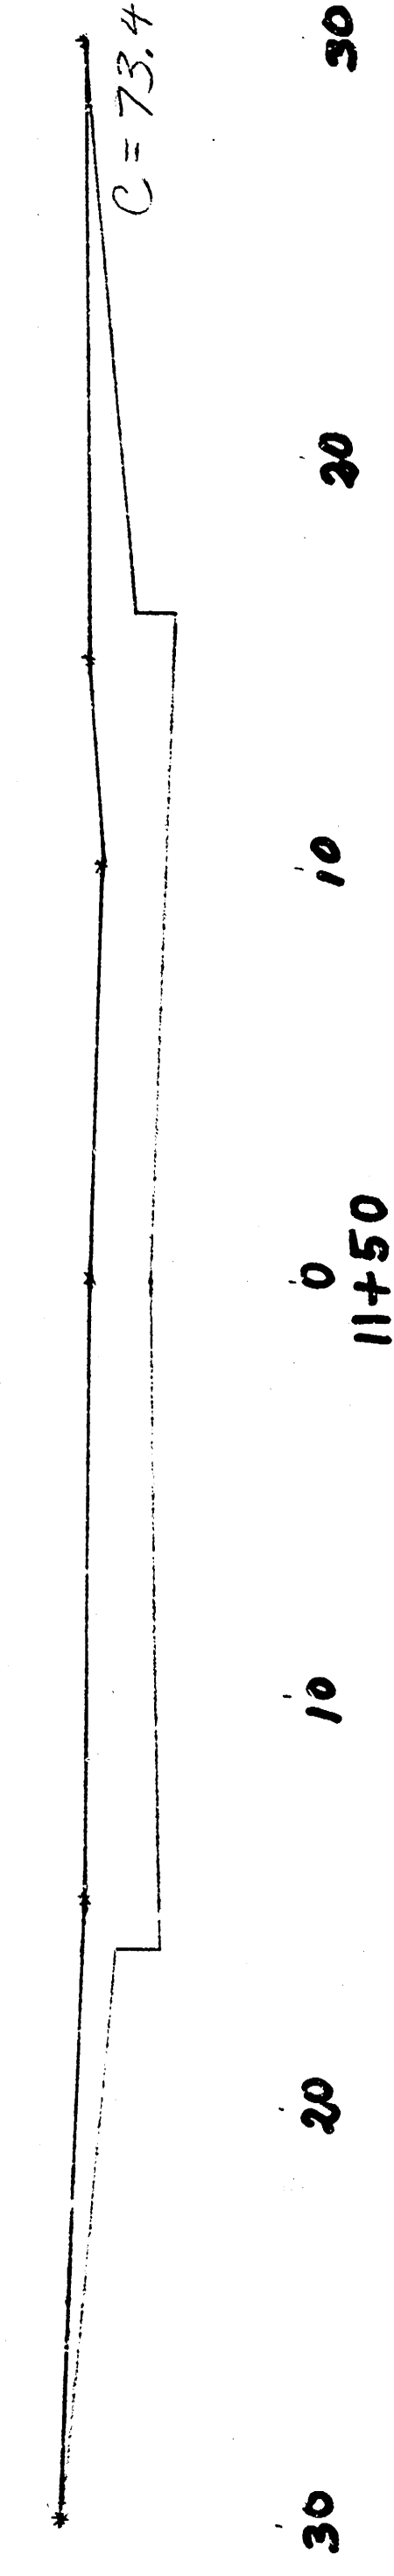


130

125

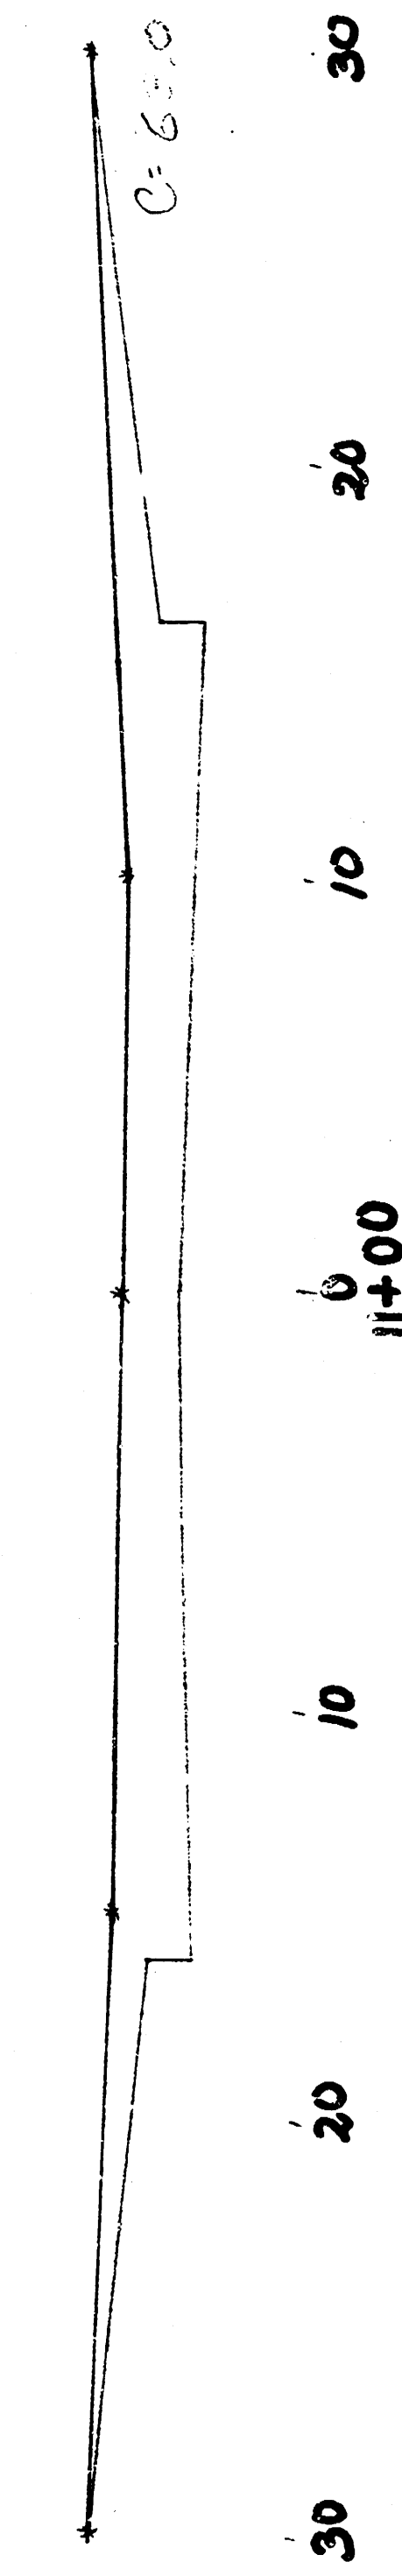


130

125

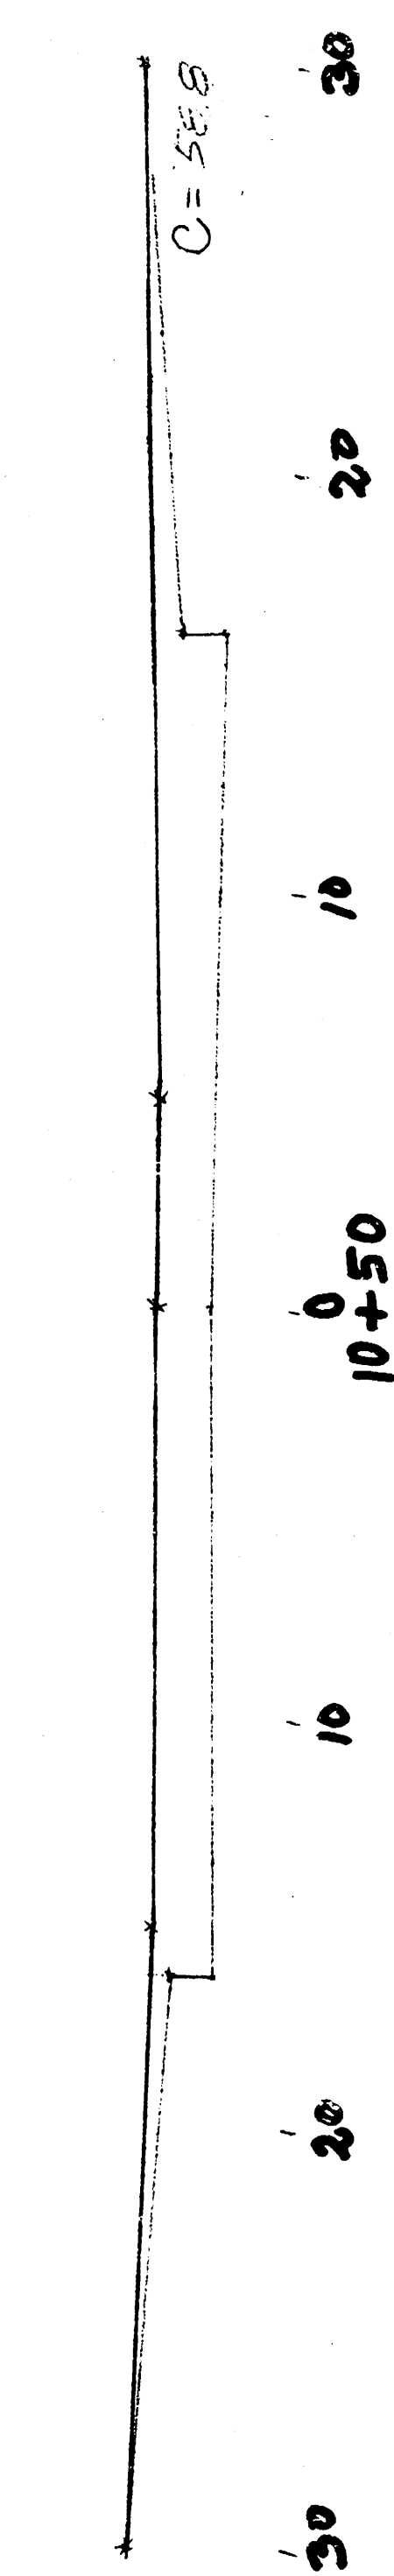


130

125

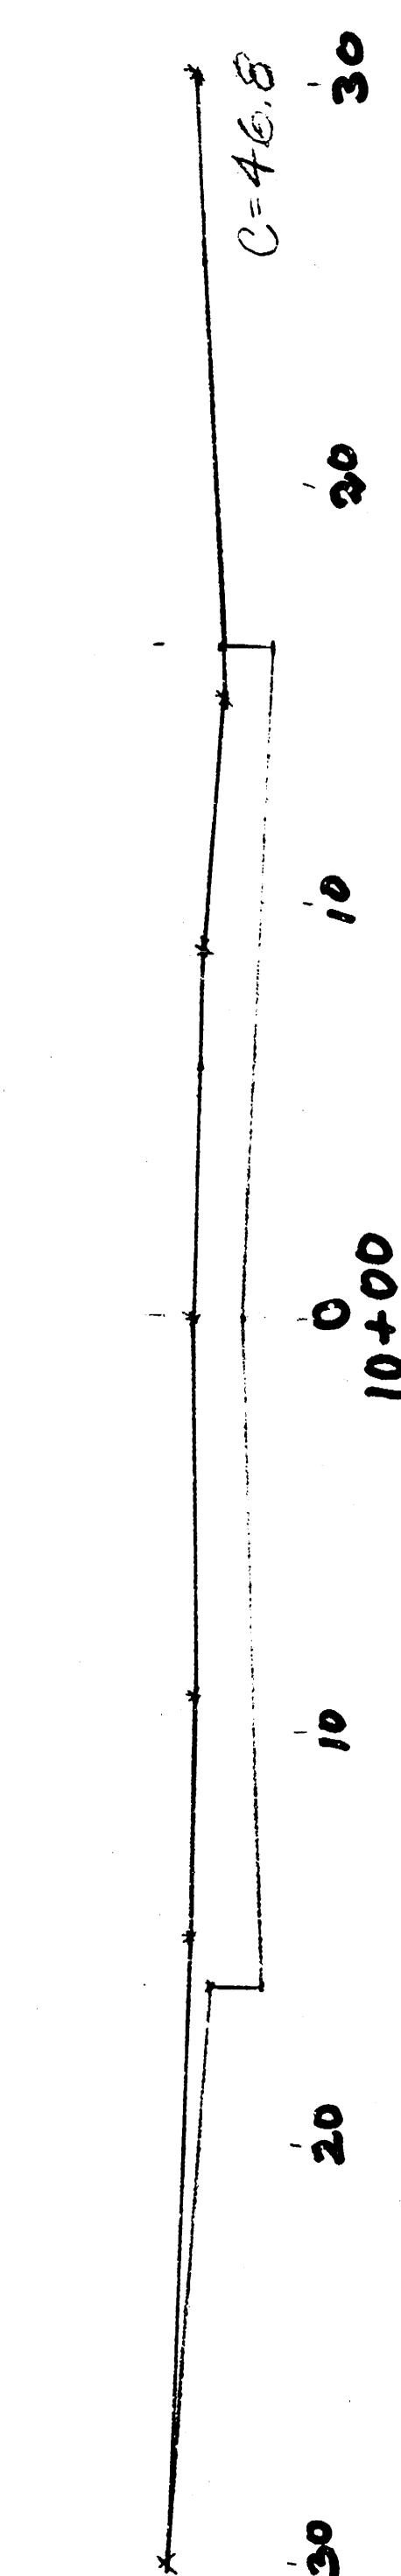


130

125

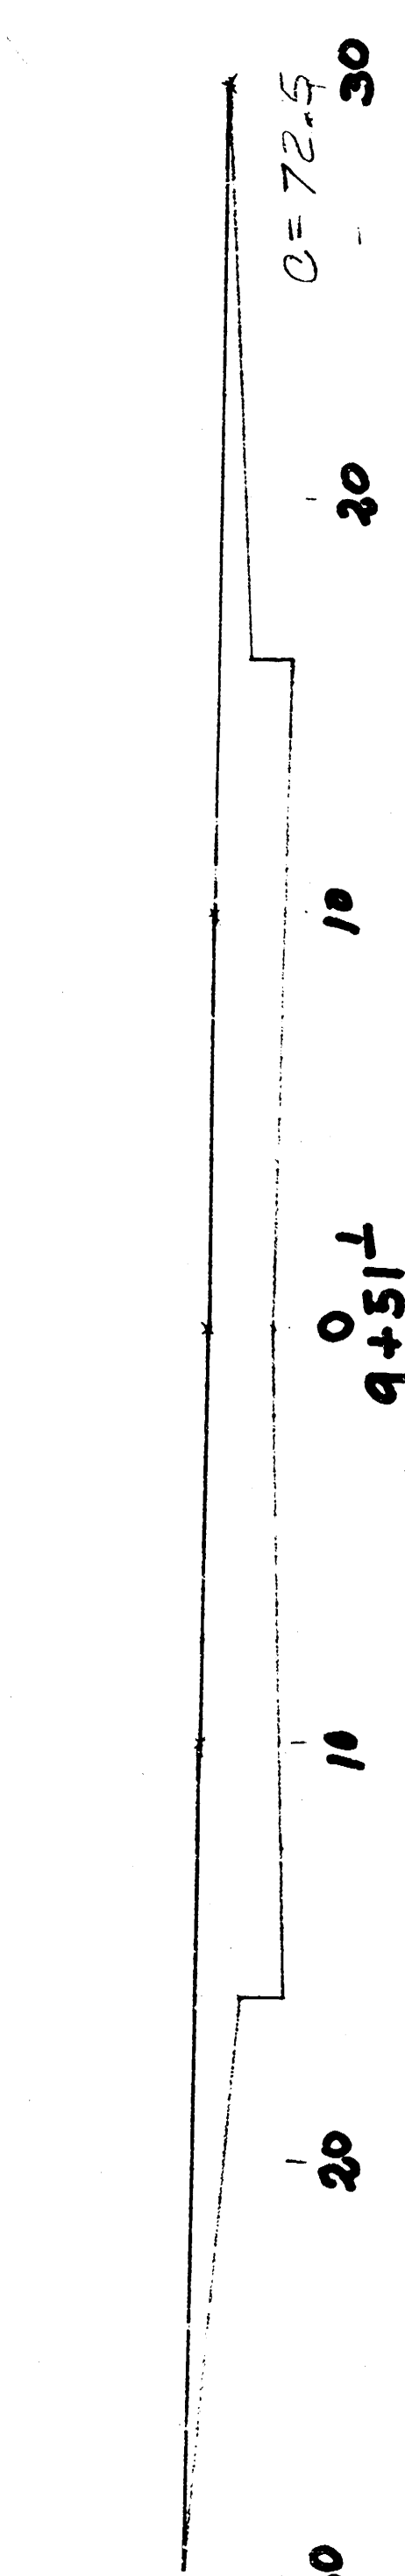

130

125

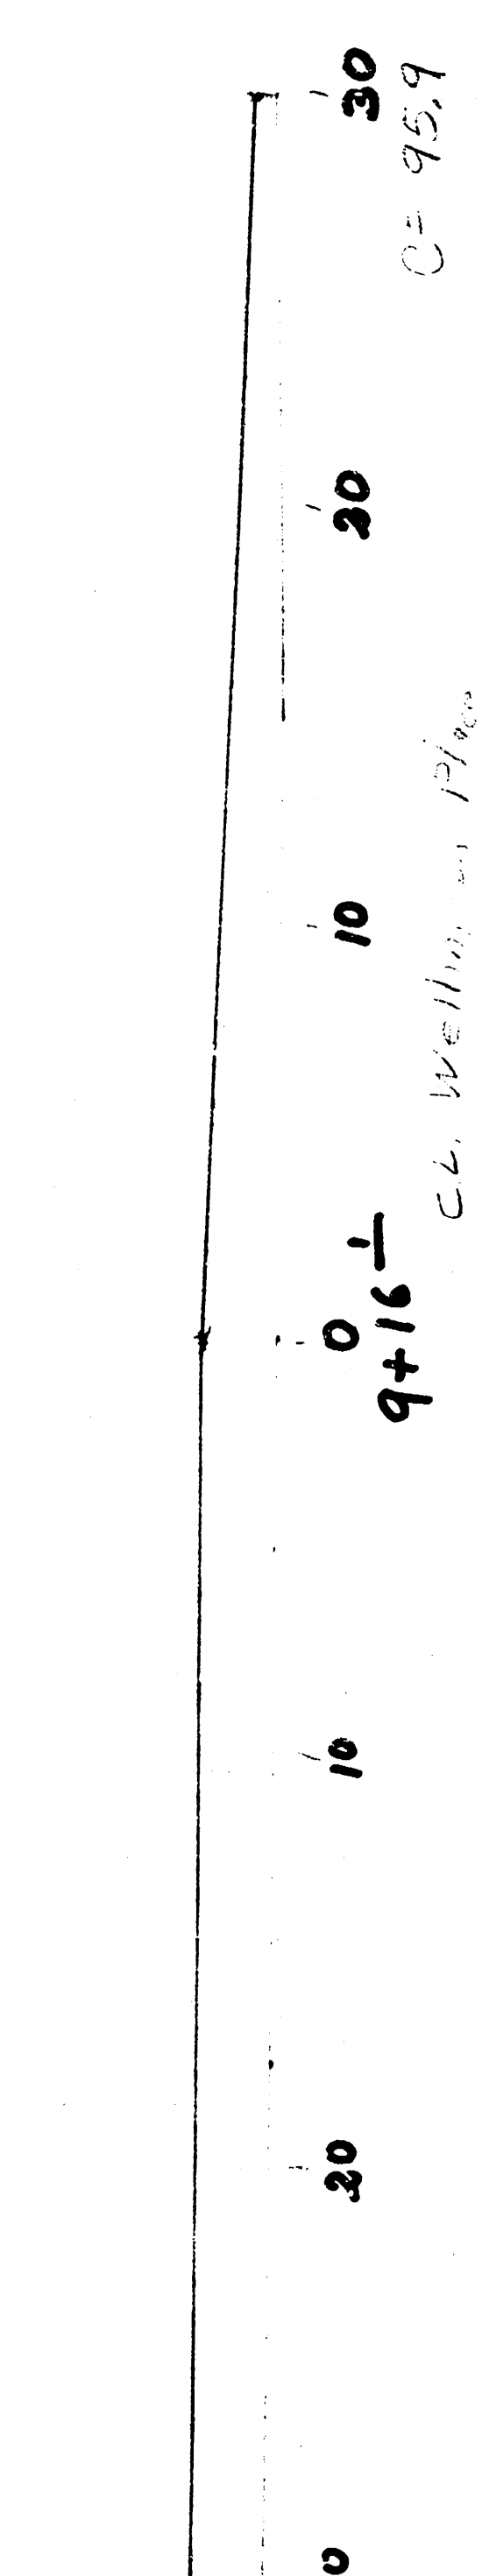


3244 St. N.-E.L. Fairview
to W.L. Park Place
472-78-245-81328-000-000-001


Sheet Total 111.7 C.H. 2.4
TOTAL OF ALL SHEETS
30372 C.H. 2.4

FILMED FROM THE BEST
AVAILABLE COPY.....

130 } 6+92.1
 125 }
 130 } 6+92.1
 125 }
 130 } 6+92.1
 125 }

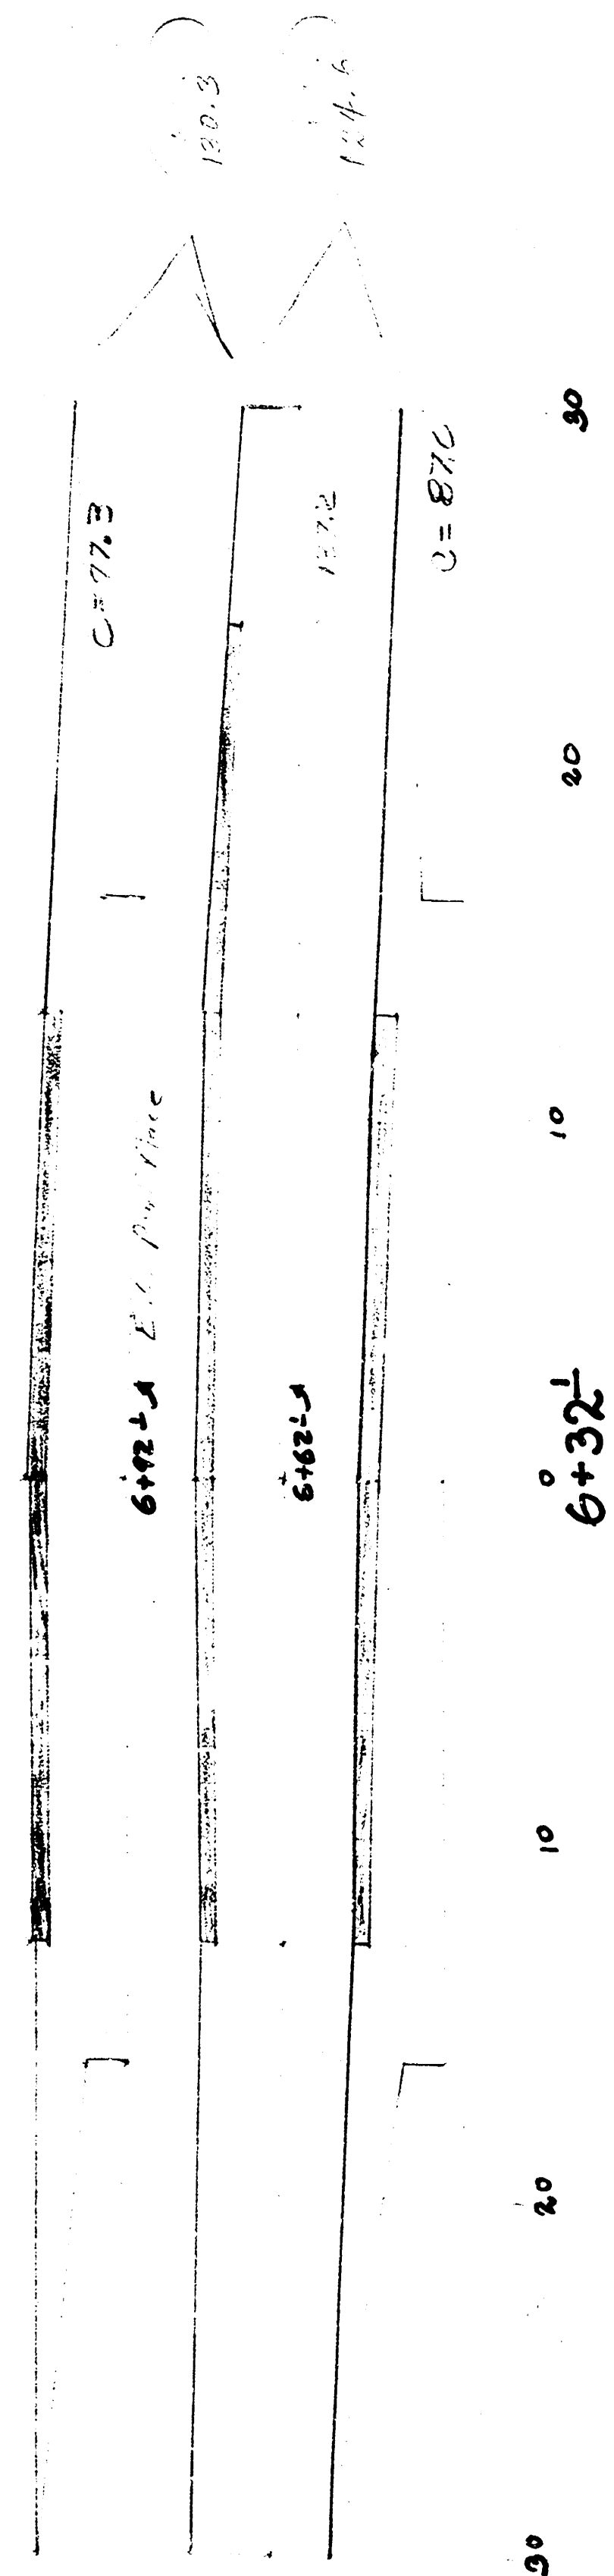


130

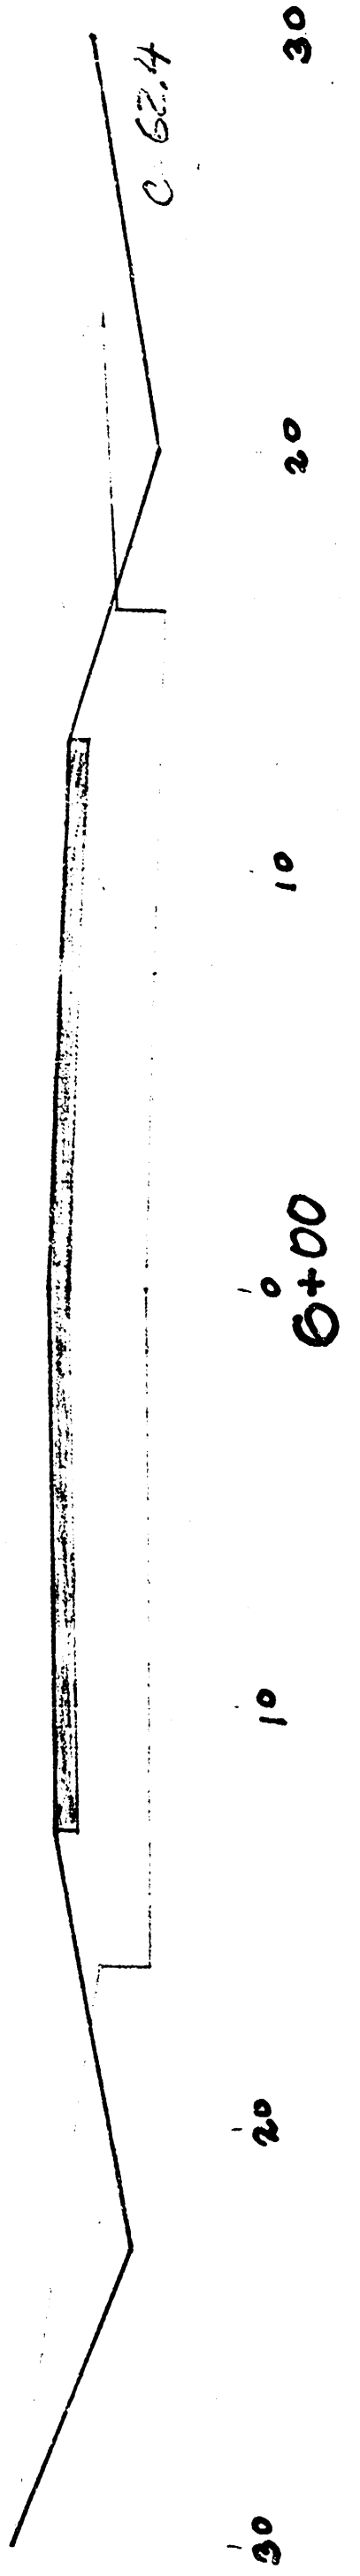


125

130

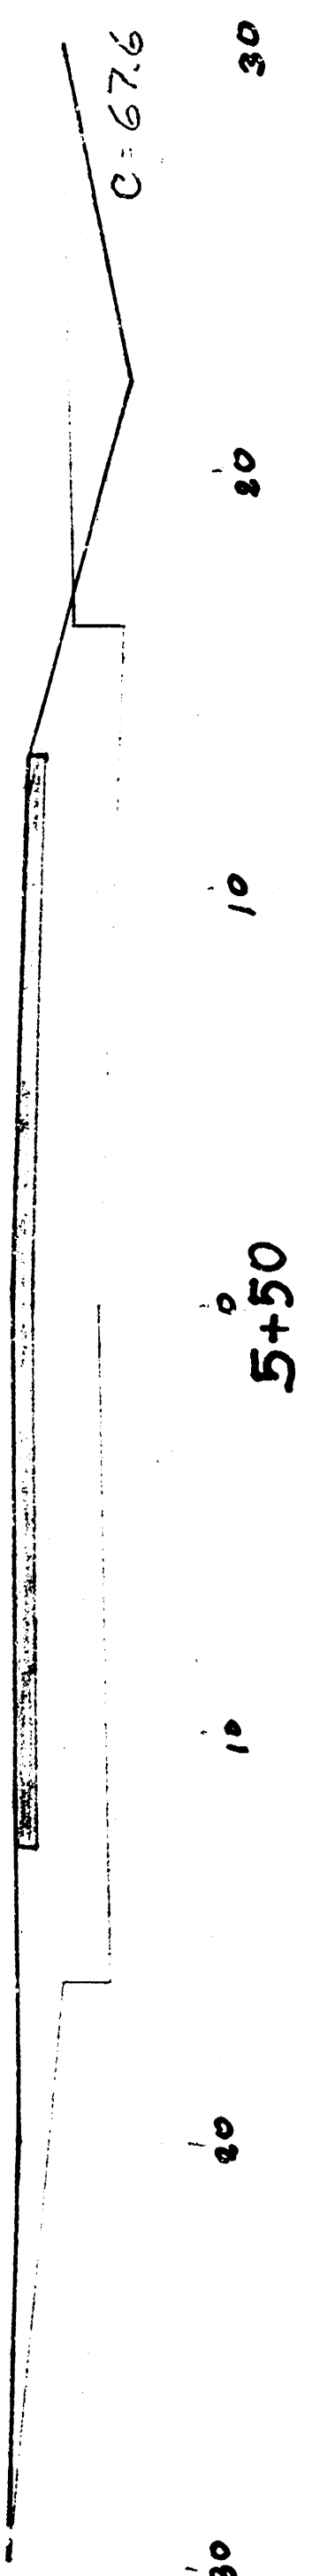


125

130

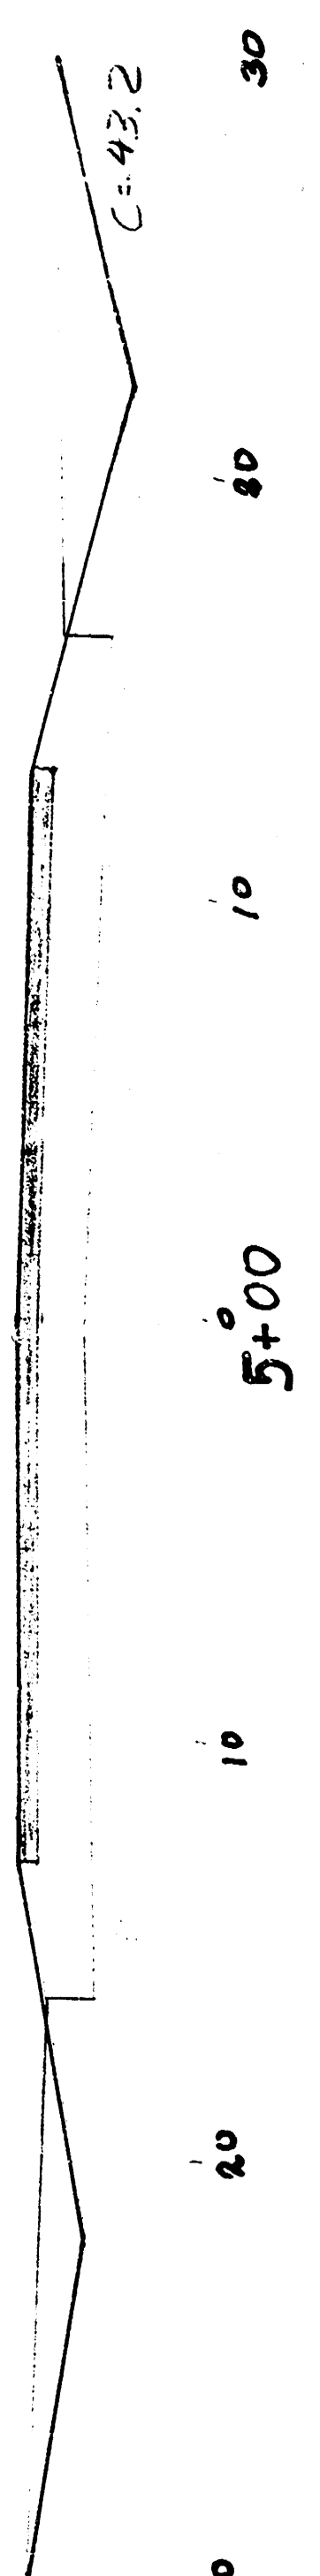


125

130

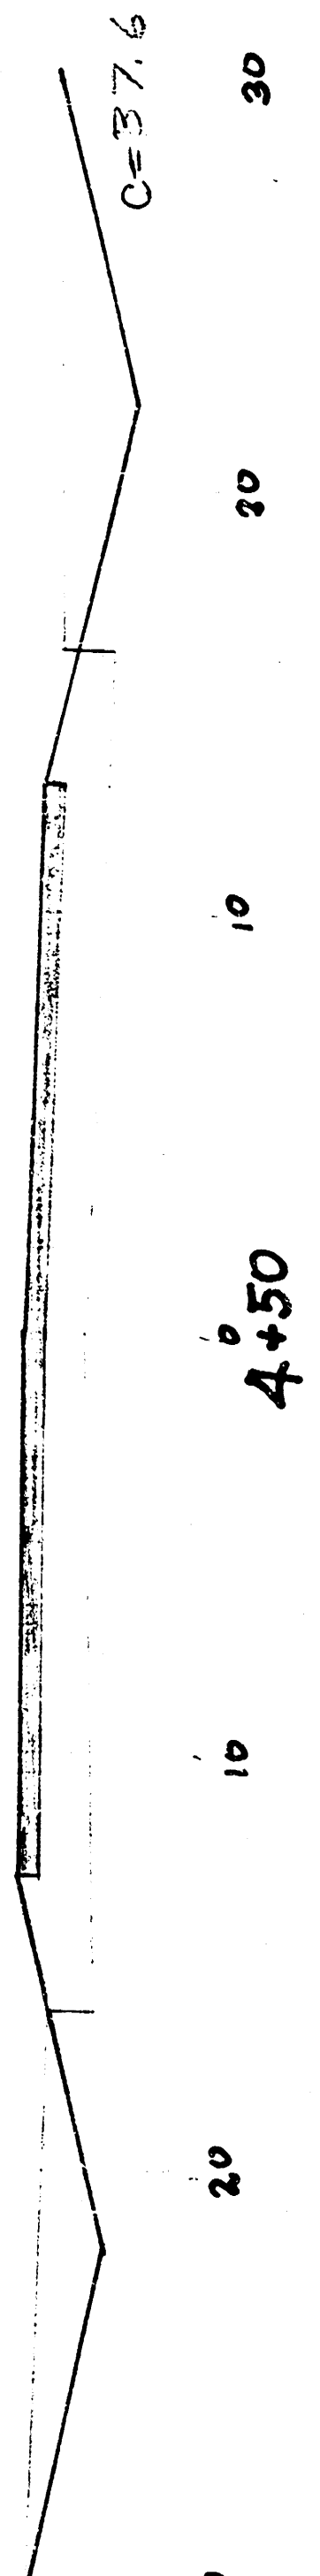


125

130

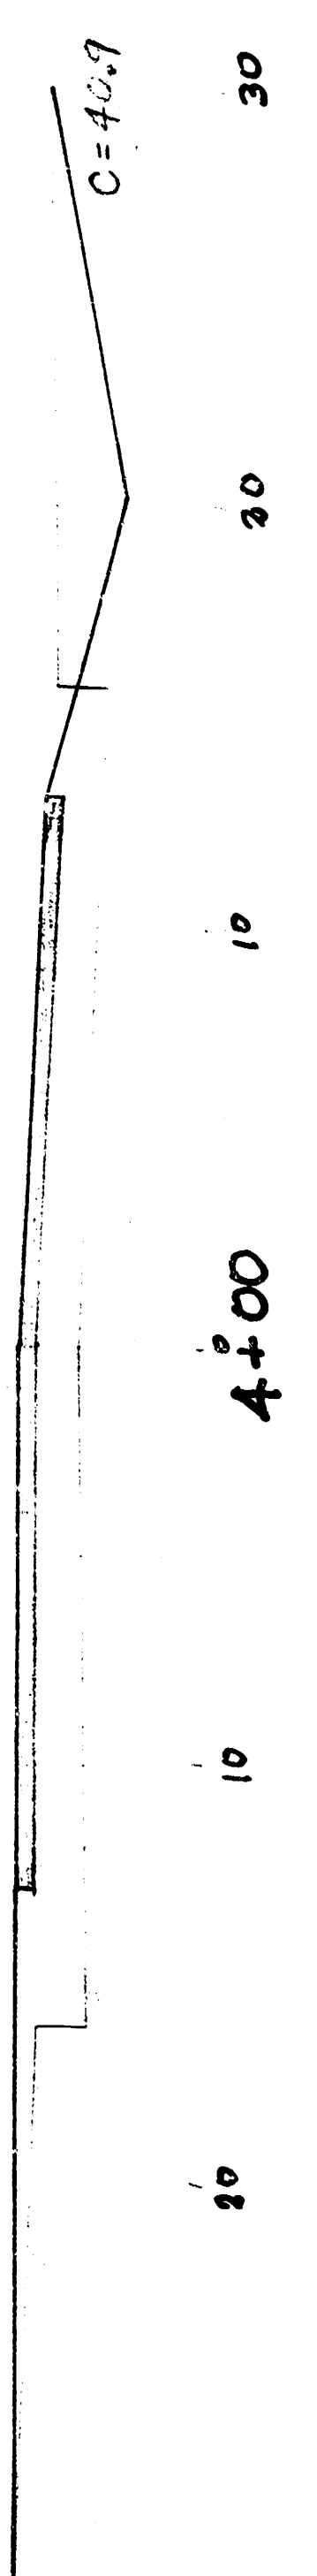


125

130

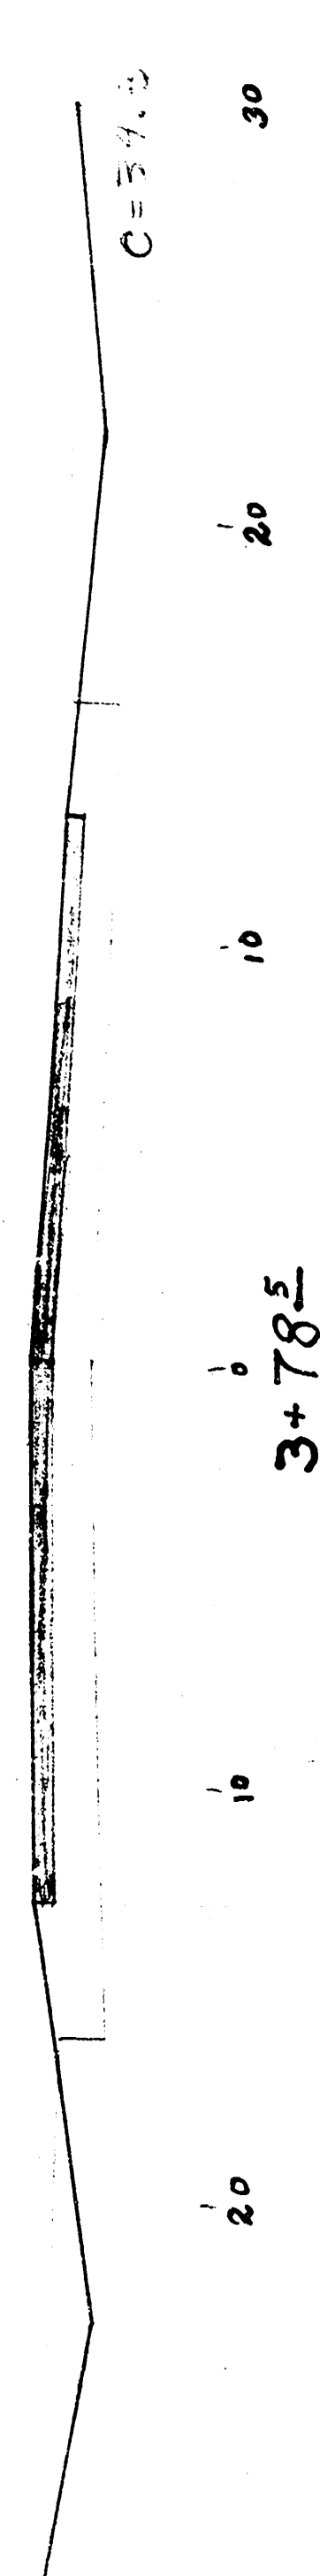


125

33rd St. N. E.L. Wellington
 Place to E.L. Park Place
 472-76-245-81328-000-001

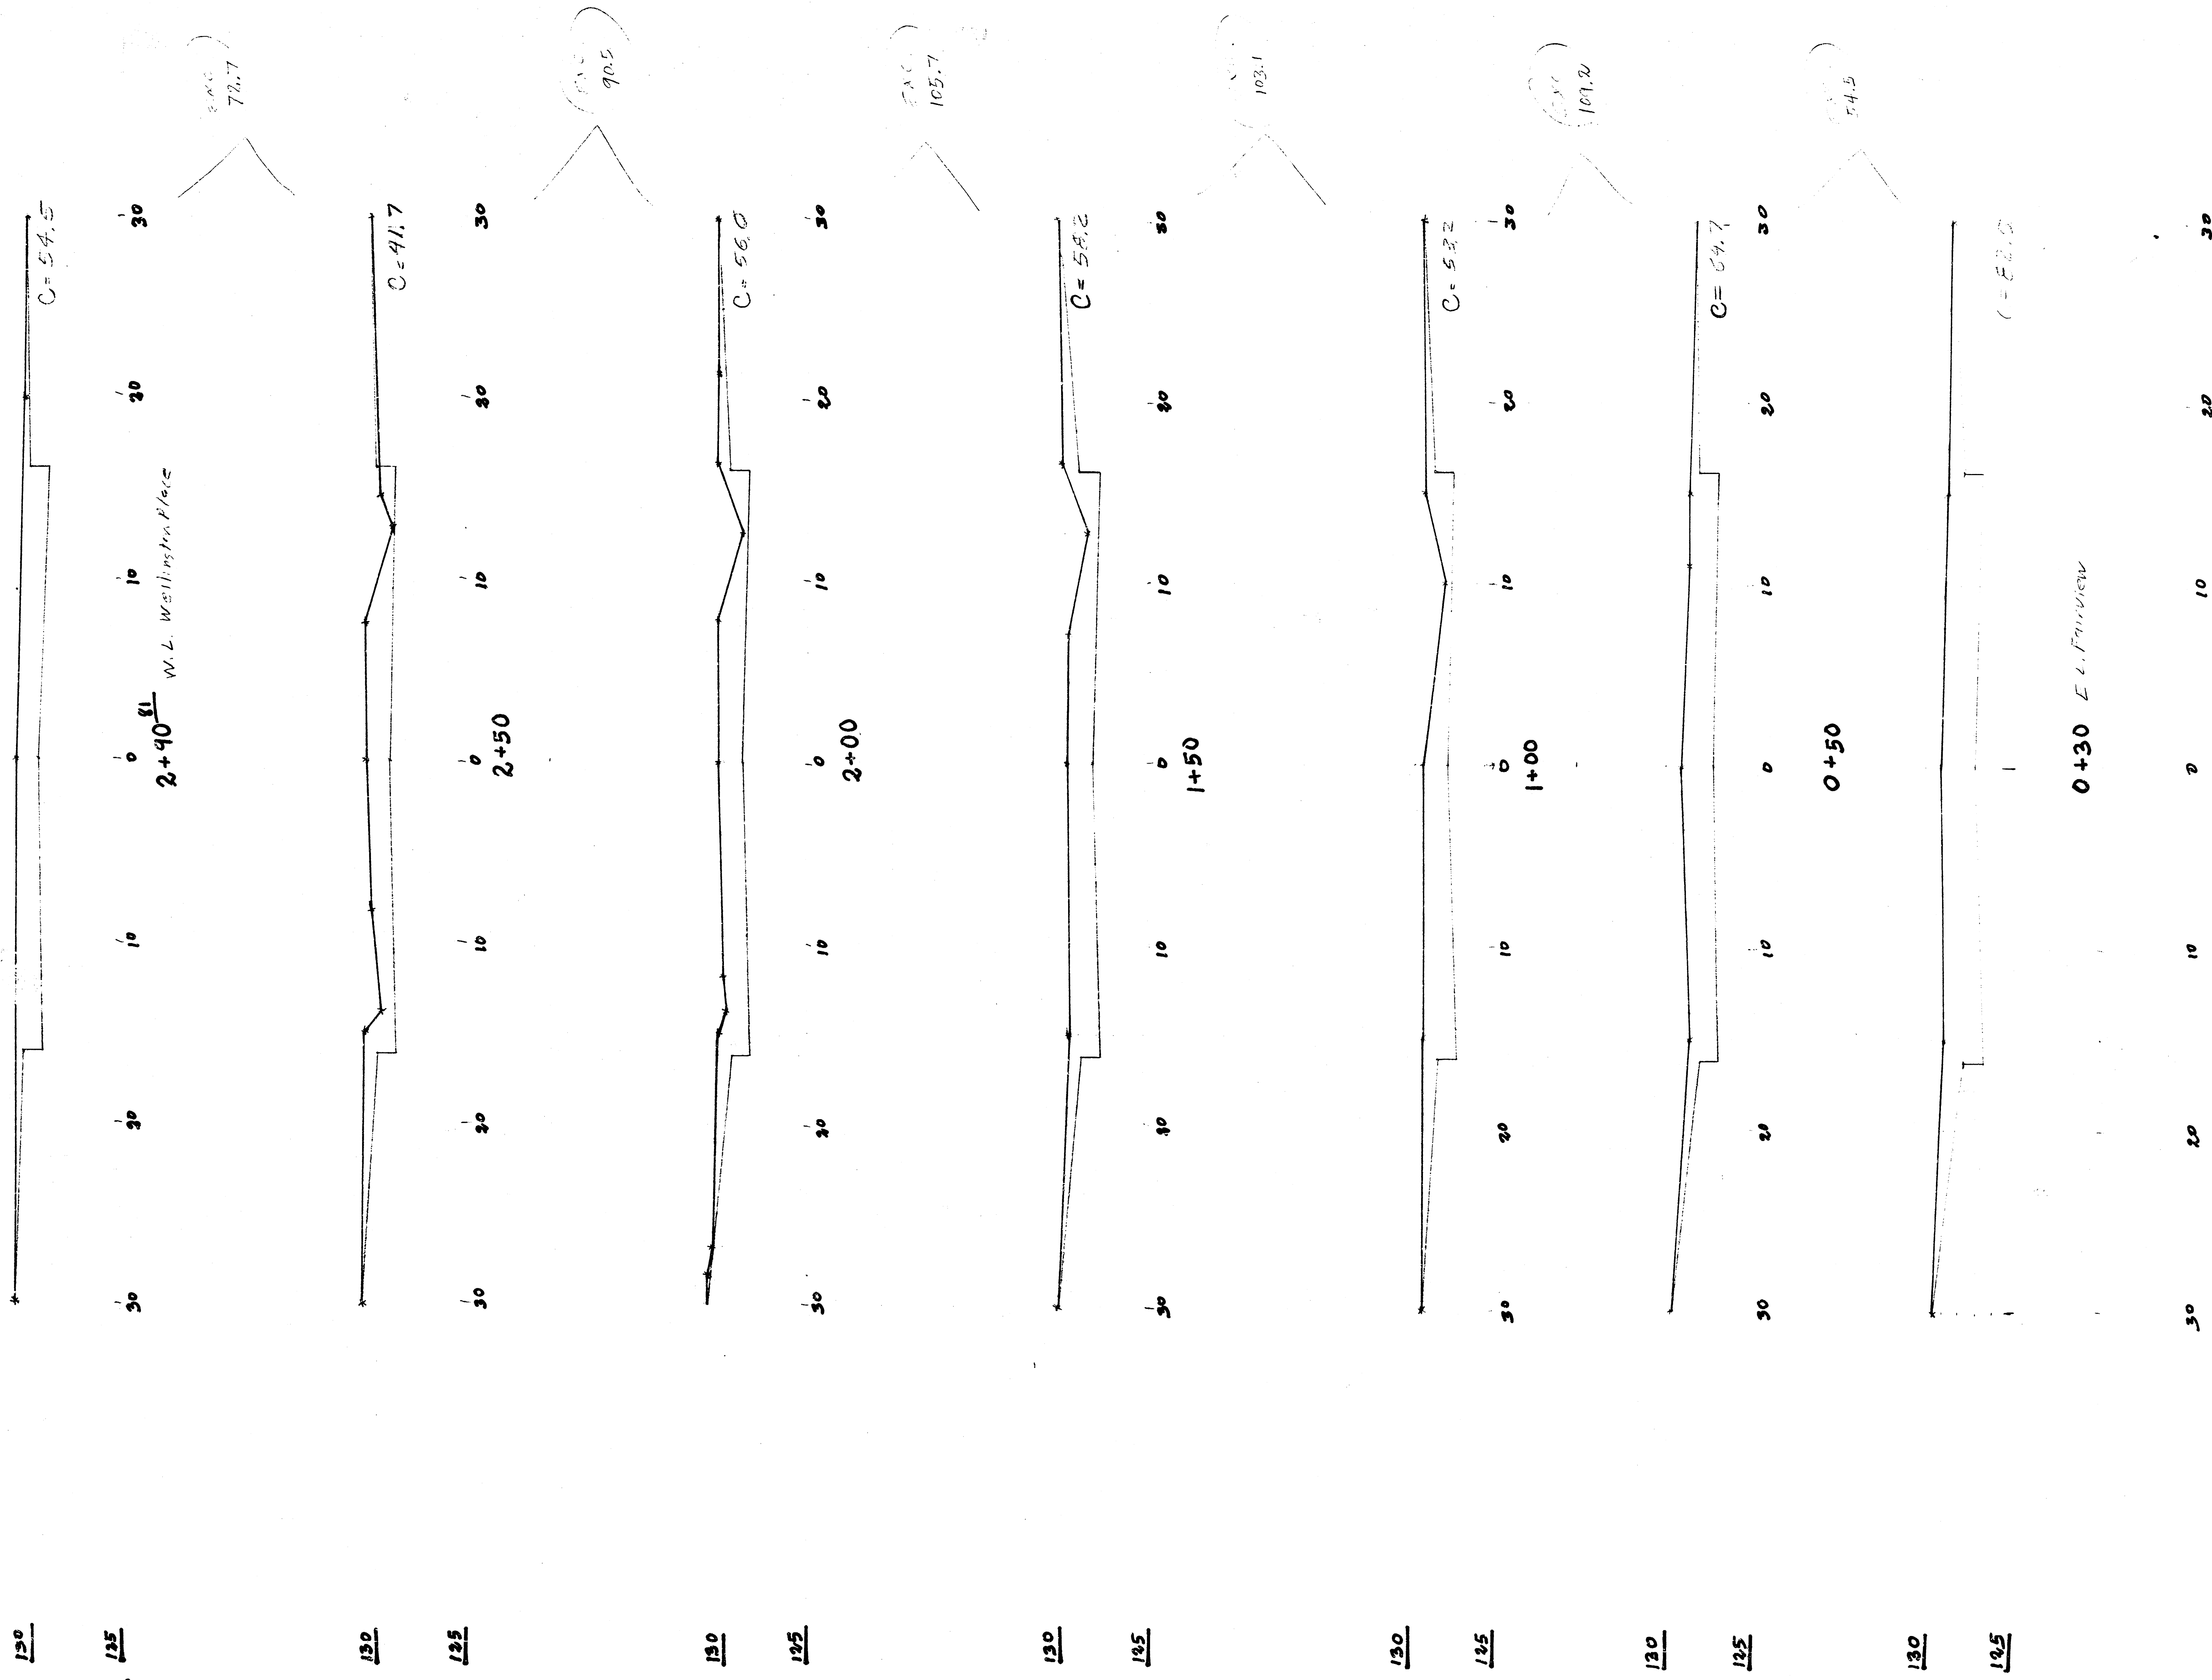


34TH ST NORTH
 EL. FARMVIEW TO
 W.L. WELLINGTON PLACE
 472-76-245-01320-000-001


Sheet 1 of 1
 5/25/11 4:11 PM

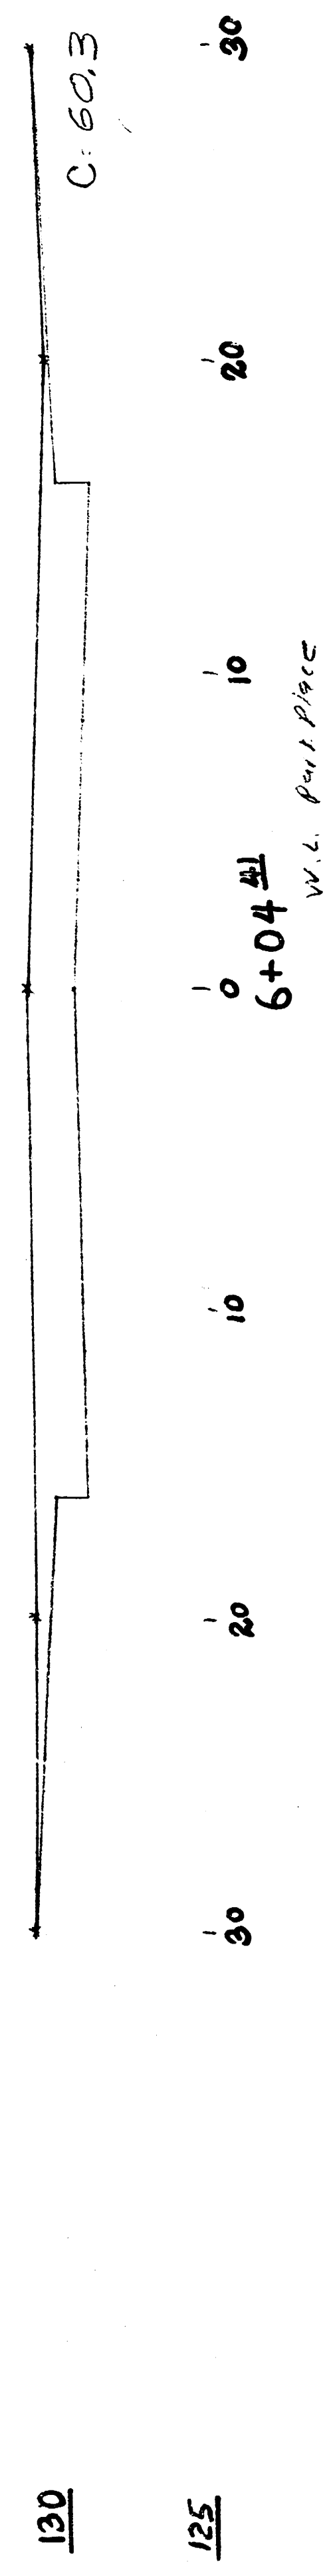


103.8

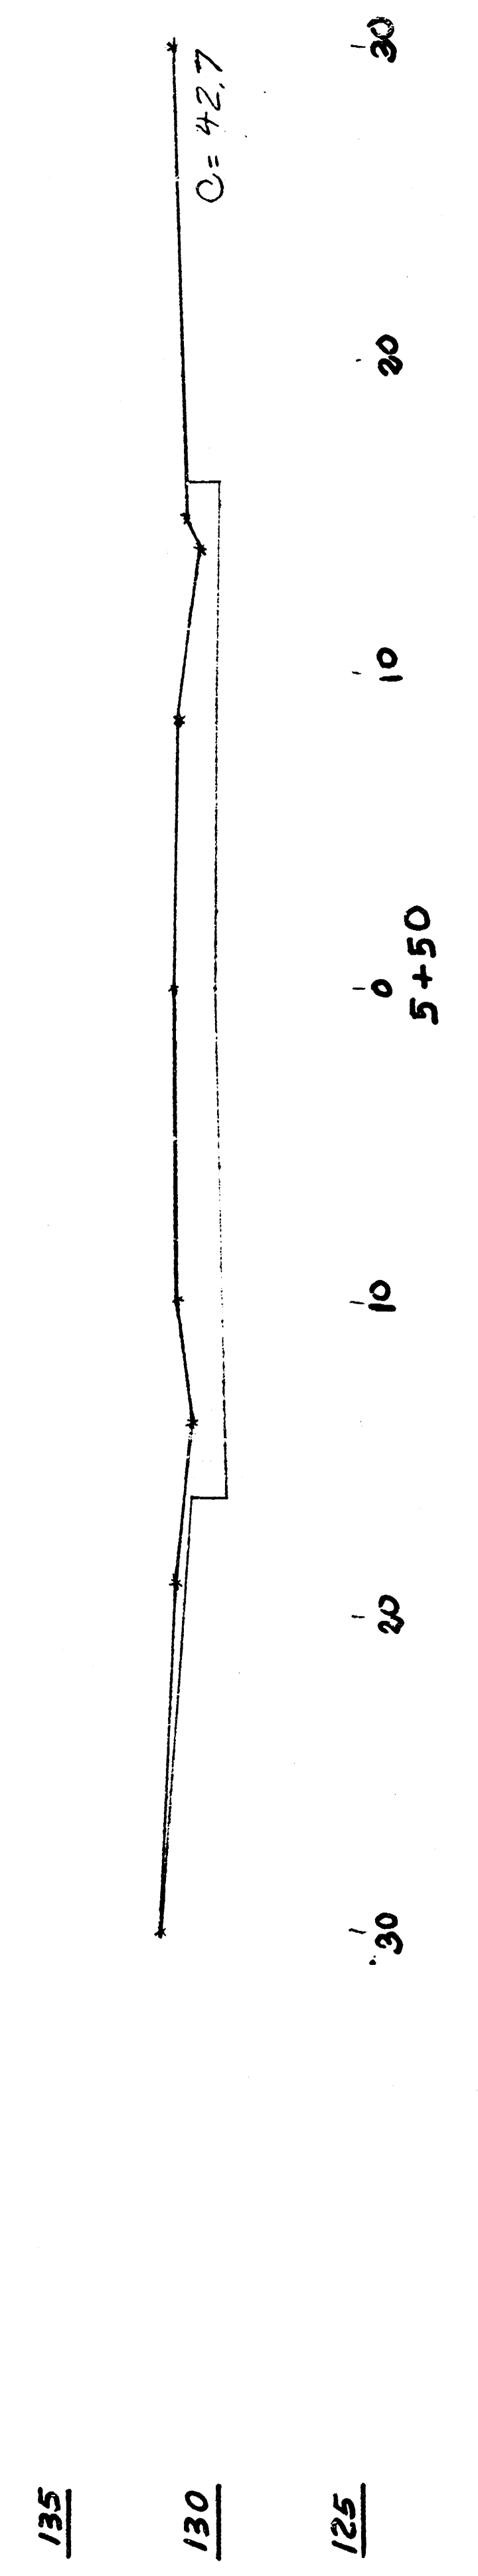


82.9

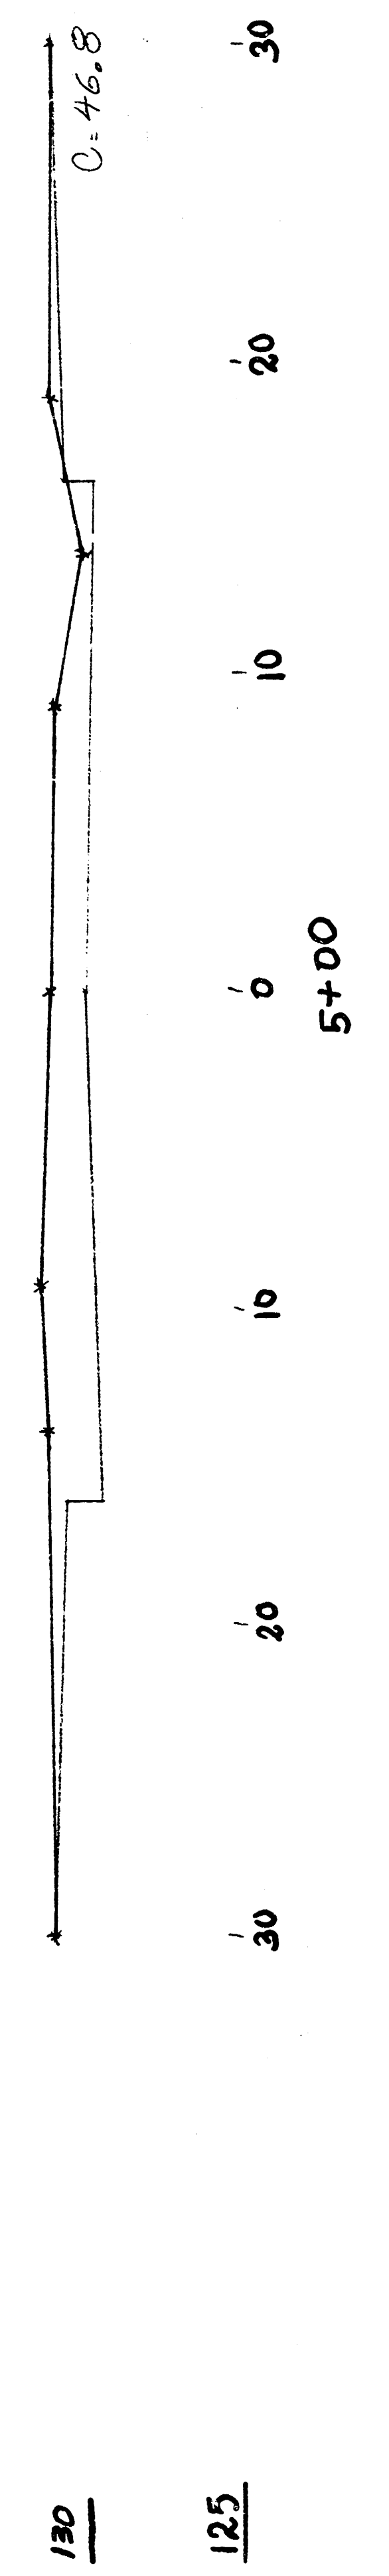


82.0

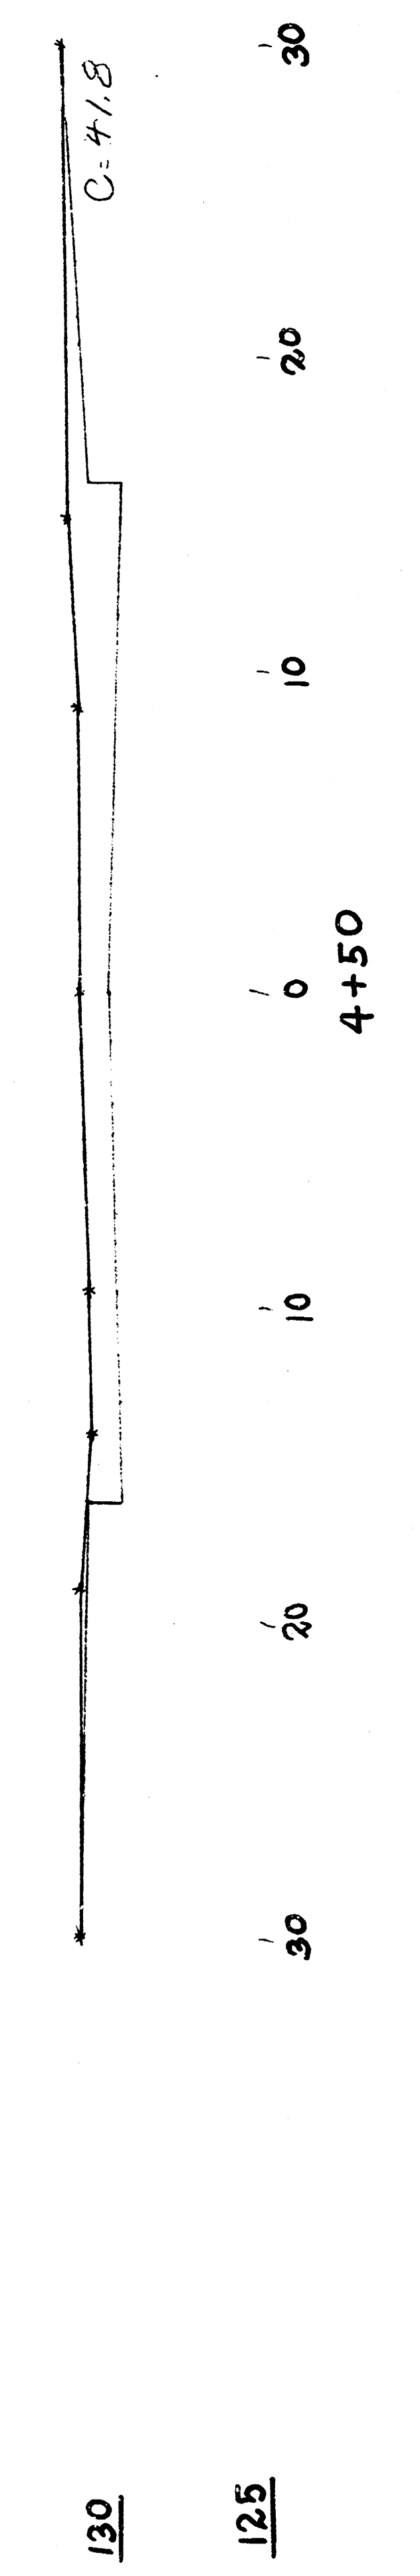

87.4

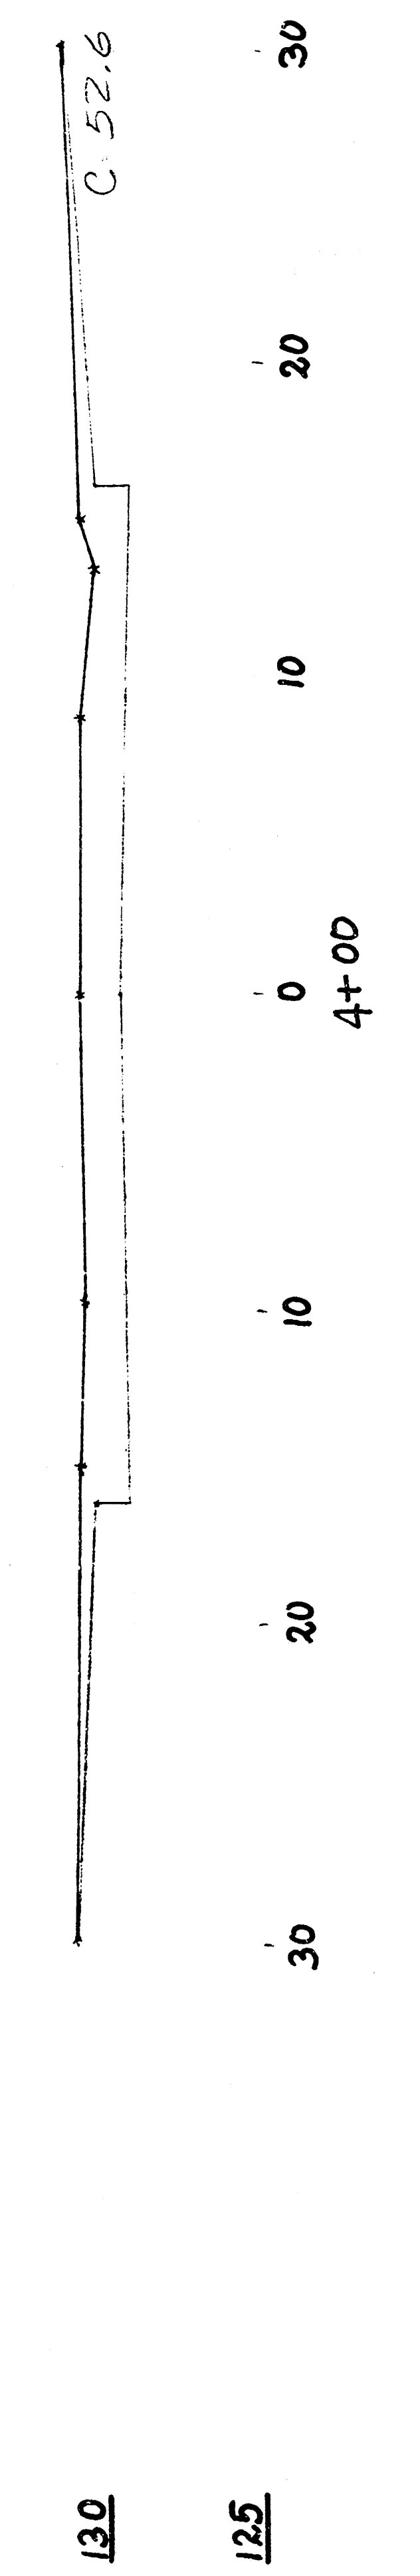

89.1


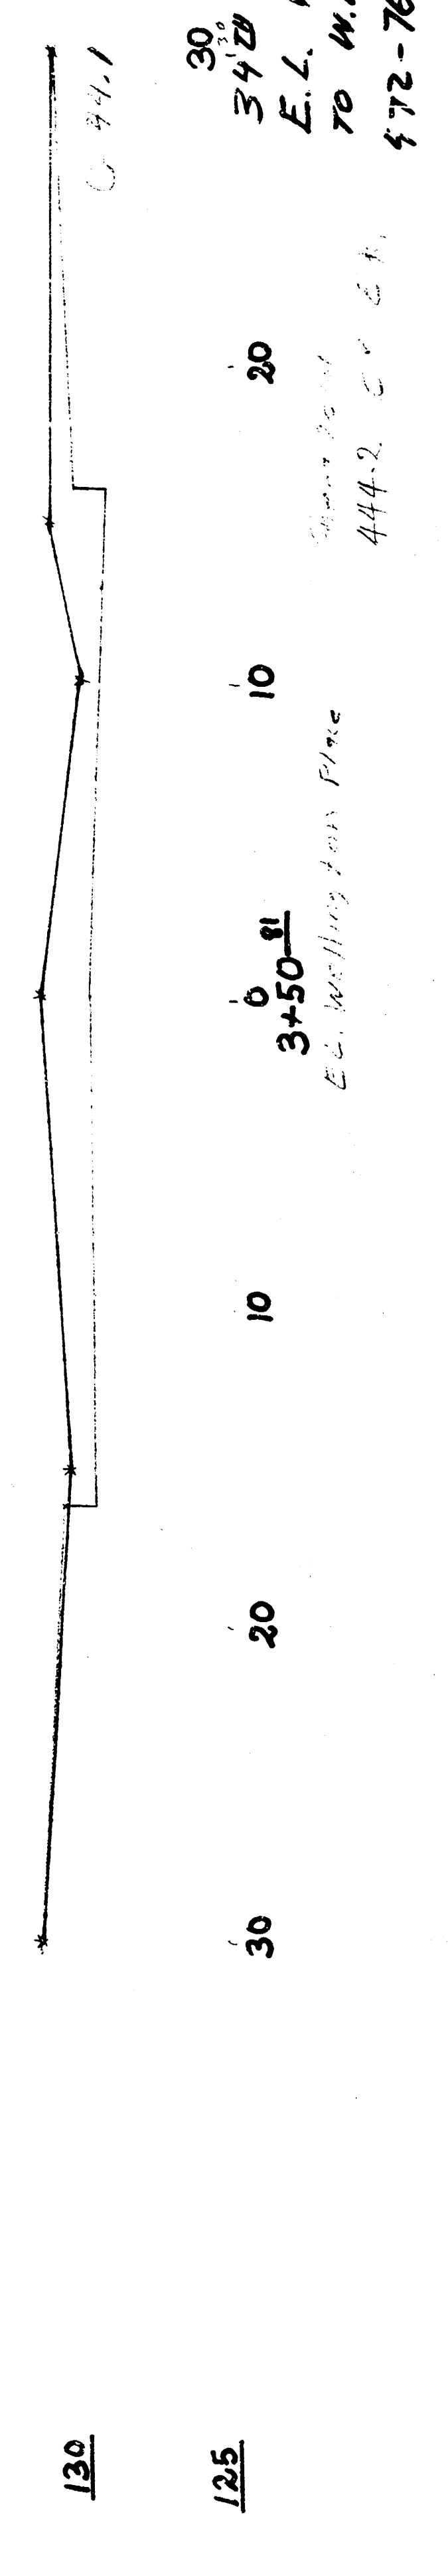


30 34th St. North Place
E.L. Wellington Place
TO W.L. Park Place
444.2 C.V. 2.11
472-76-245-8/128-000-000-001

1/12

1/12


FILMED FROM THE BEST AVAILABLE COPY

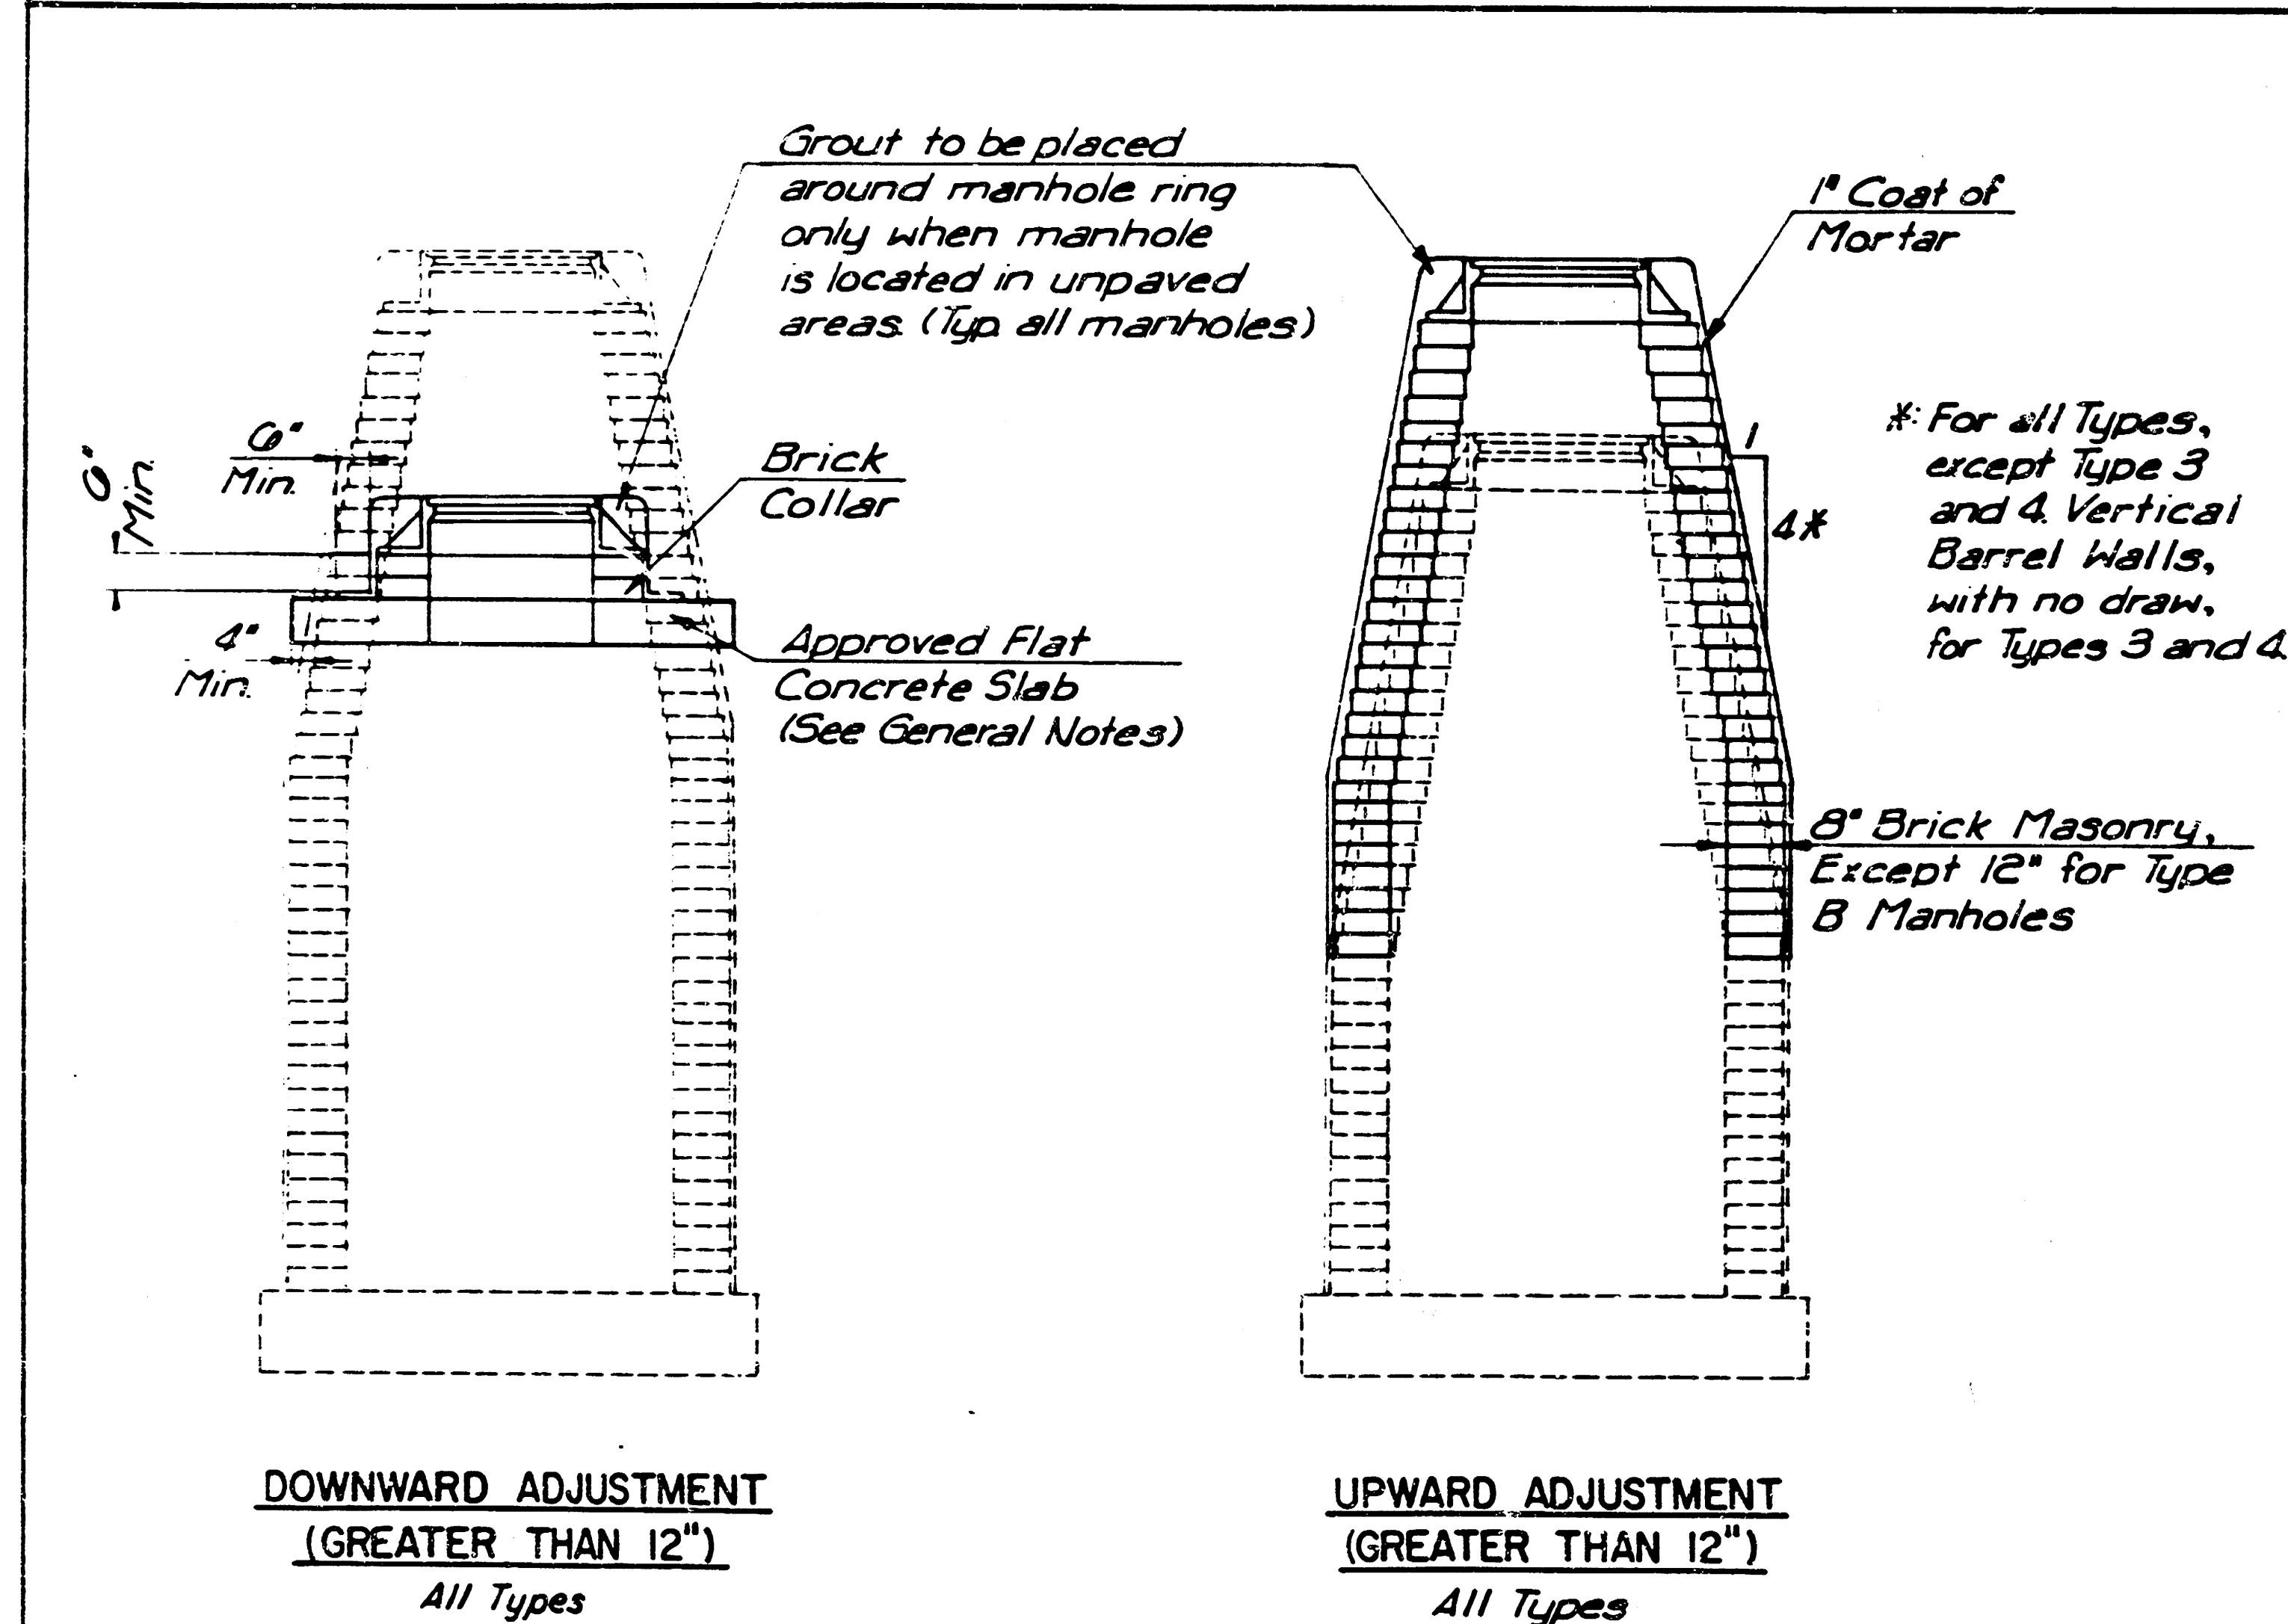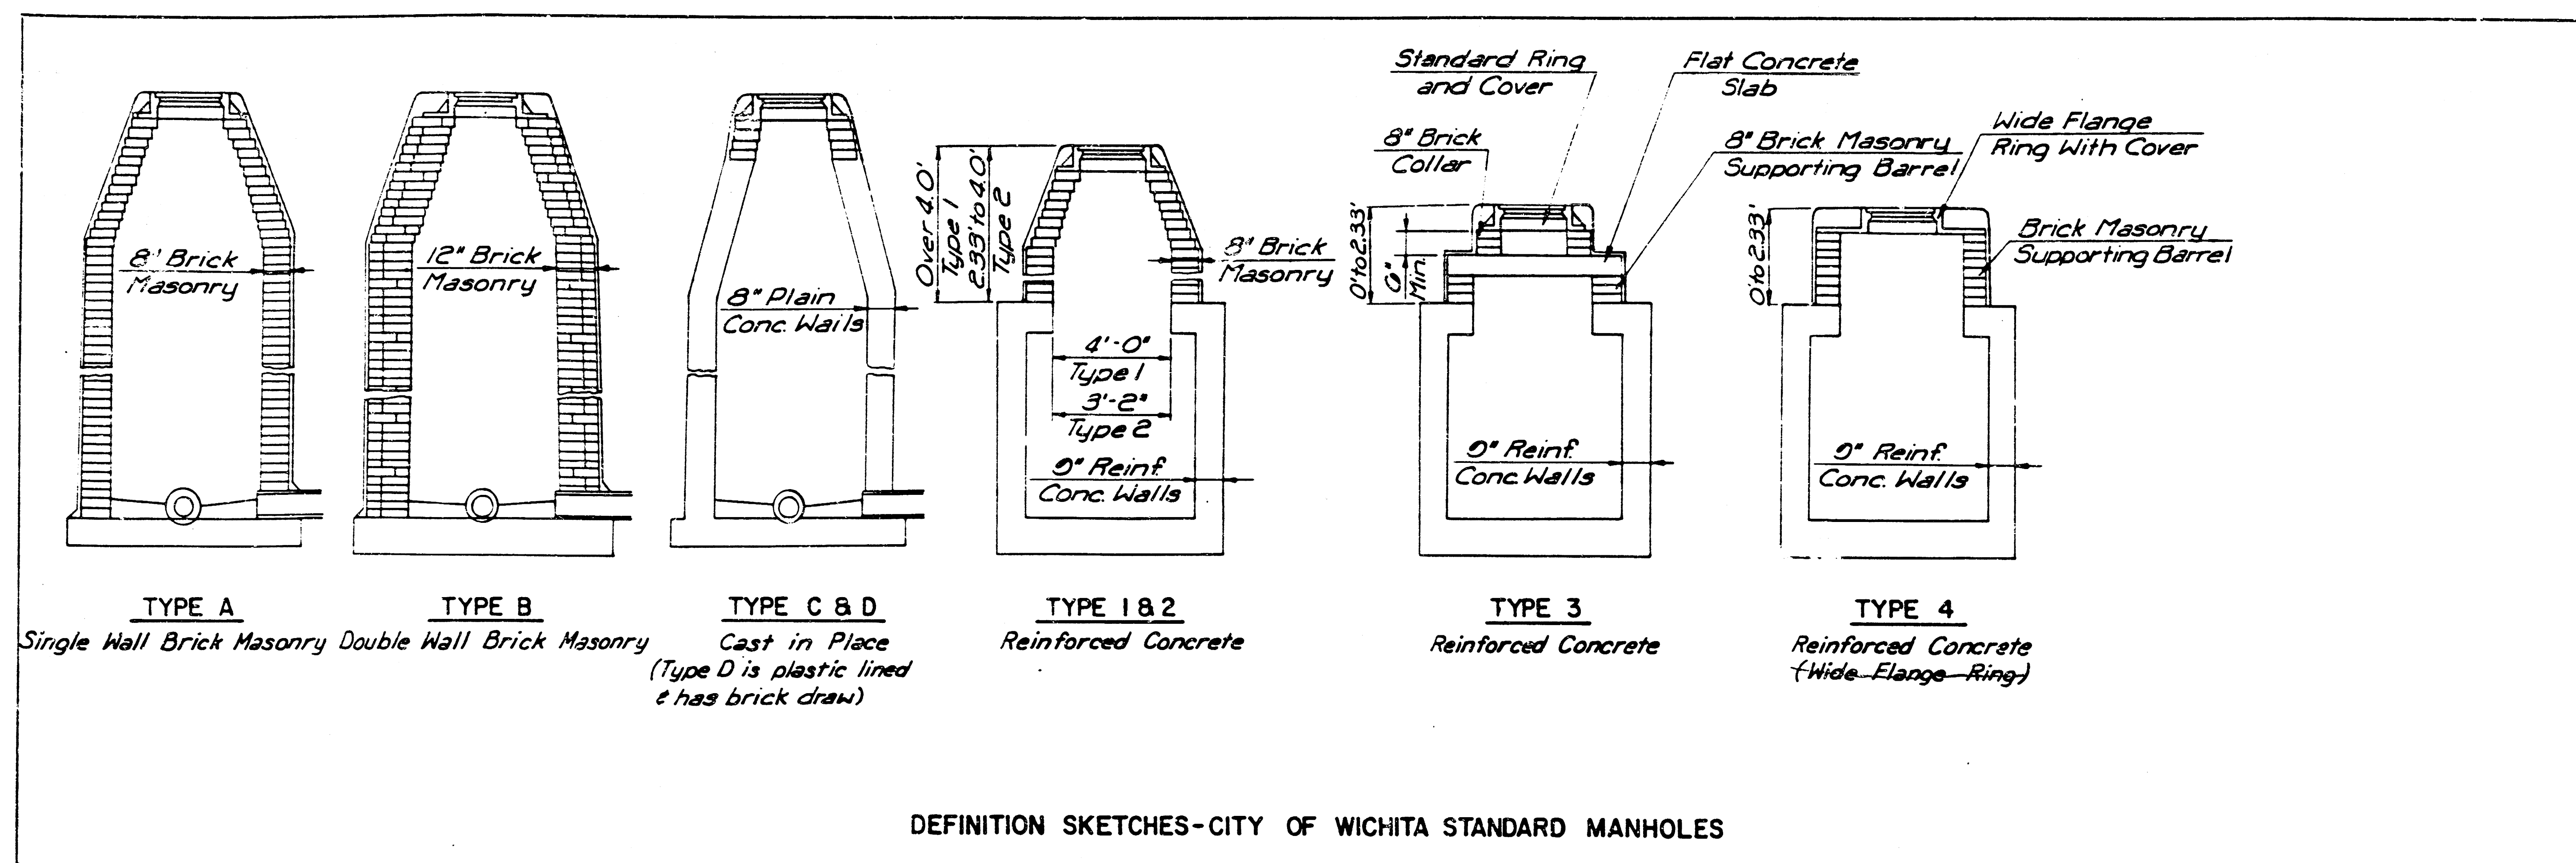

THE APPROPRIATE PORTIONS OF THE DRAW AND BARREL OF TYPE A, B, C, D, 1 AND 2 MANHOLES SHALL BE REMOVED. A FLAT CONCRETE SLAB SHALL BE PLACED AND THE RING AND COVER RESET. ALL WORK AND MATERIALS SHALL CONFORM TO THE DETAILS SHOWN AND THE GENERAL NOTES.

COURSES OF BRICK BARREL SUPPORTING THE WIDE FLANGE RING FOR TYPE 4 MANHOLES AND FLAT CONCRETE SLAB FOR TYPE 3 MANHOLES SHALL BE REMOVED AS NECESSARY PRIOR TO RESETTING THE WIDE FLANGE RING OR FLAT CONCRETE SLAB AND RING. ALL WORK AND MATERIALS SHALL CONFORM TO THE DETAILS SHOWN AND THE GENERAL NOTES.

THE ENTIRE DRAW OF TYPES A, B, C, D, 1 AND 2 MANHOLES SHALL BE REMOVED, THE MANHOLE BARREL RAISED THE APPROPRIATE AMOUNT, A NEW DRAW CONSTRUCTED, AND THE RING AND COVER RESET. THE UPPER PORTION OF TYPE 3 MANHOLES SHALL BE REMOVED TO THE BOTTOM OF THE FLAT CONCRETE SLAB, THE BRICK MASONRY BARREL SUPPORTING THE SLAB SHALL BE RAISED THE APPROPRIATE AMOUNT, AND THE SLAB AND RING AND COVER RESET. THE WIDE FLANGE RING AND COVER OF TYPE 4 MANHOLES SHALL BE REMOVED, THE BRICK MASONRY BARREL SUPPORTING THE RING SHALL BE RAISED THE APPROPRIATE AMOUNT AND THE RING AND COVER RESET. ALL WORK REQUIRED FOR A GREATER THAN TWELVE INCH (12") UPWARD ADJUSTMENT OF ANY MANHOLE SHALL BE ACCOMPLISHED WITH BRICK MASONRY IN ACCORDANCE WITH THE DETAILS SHOWN AND THE GENERAL NOTES.

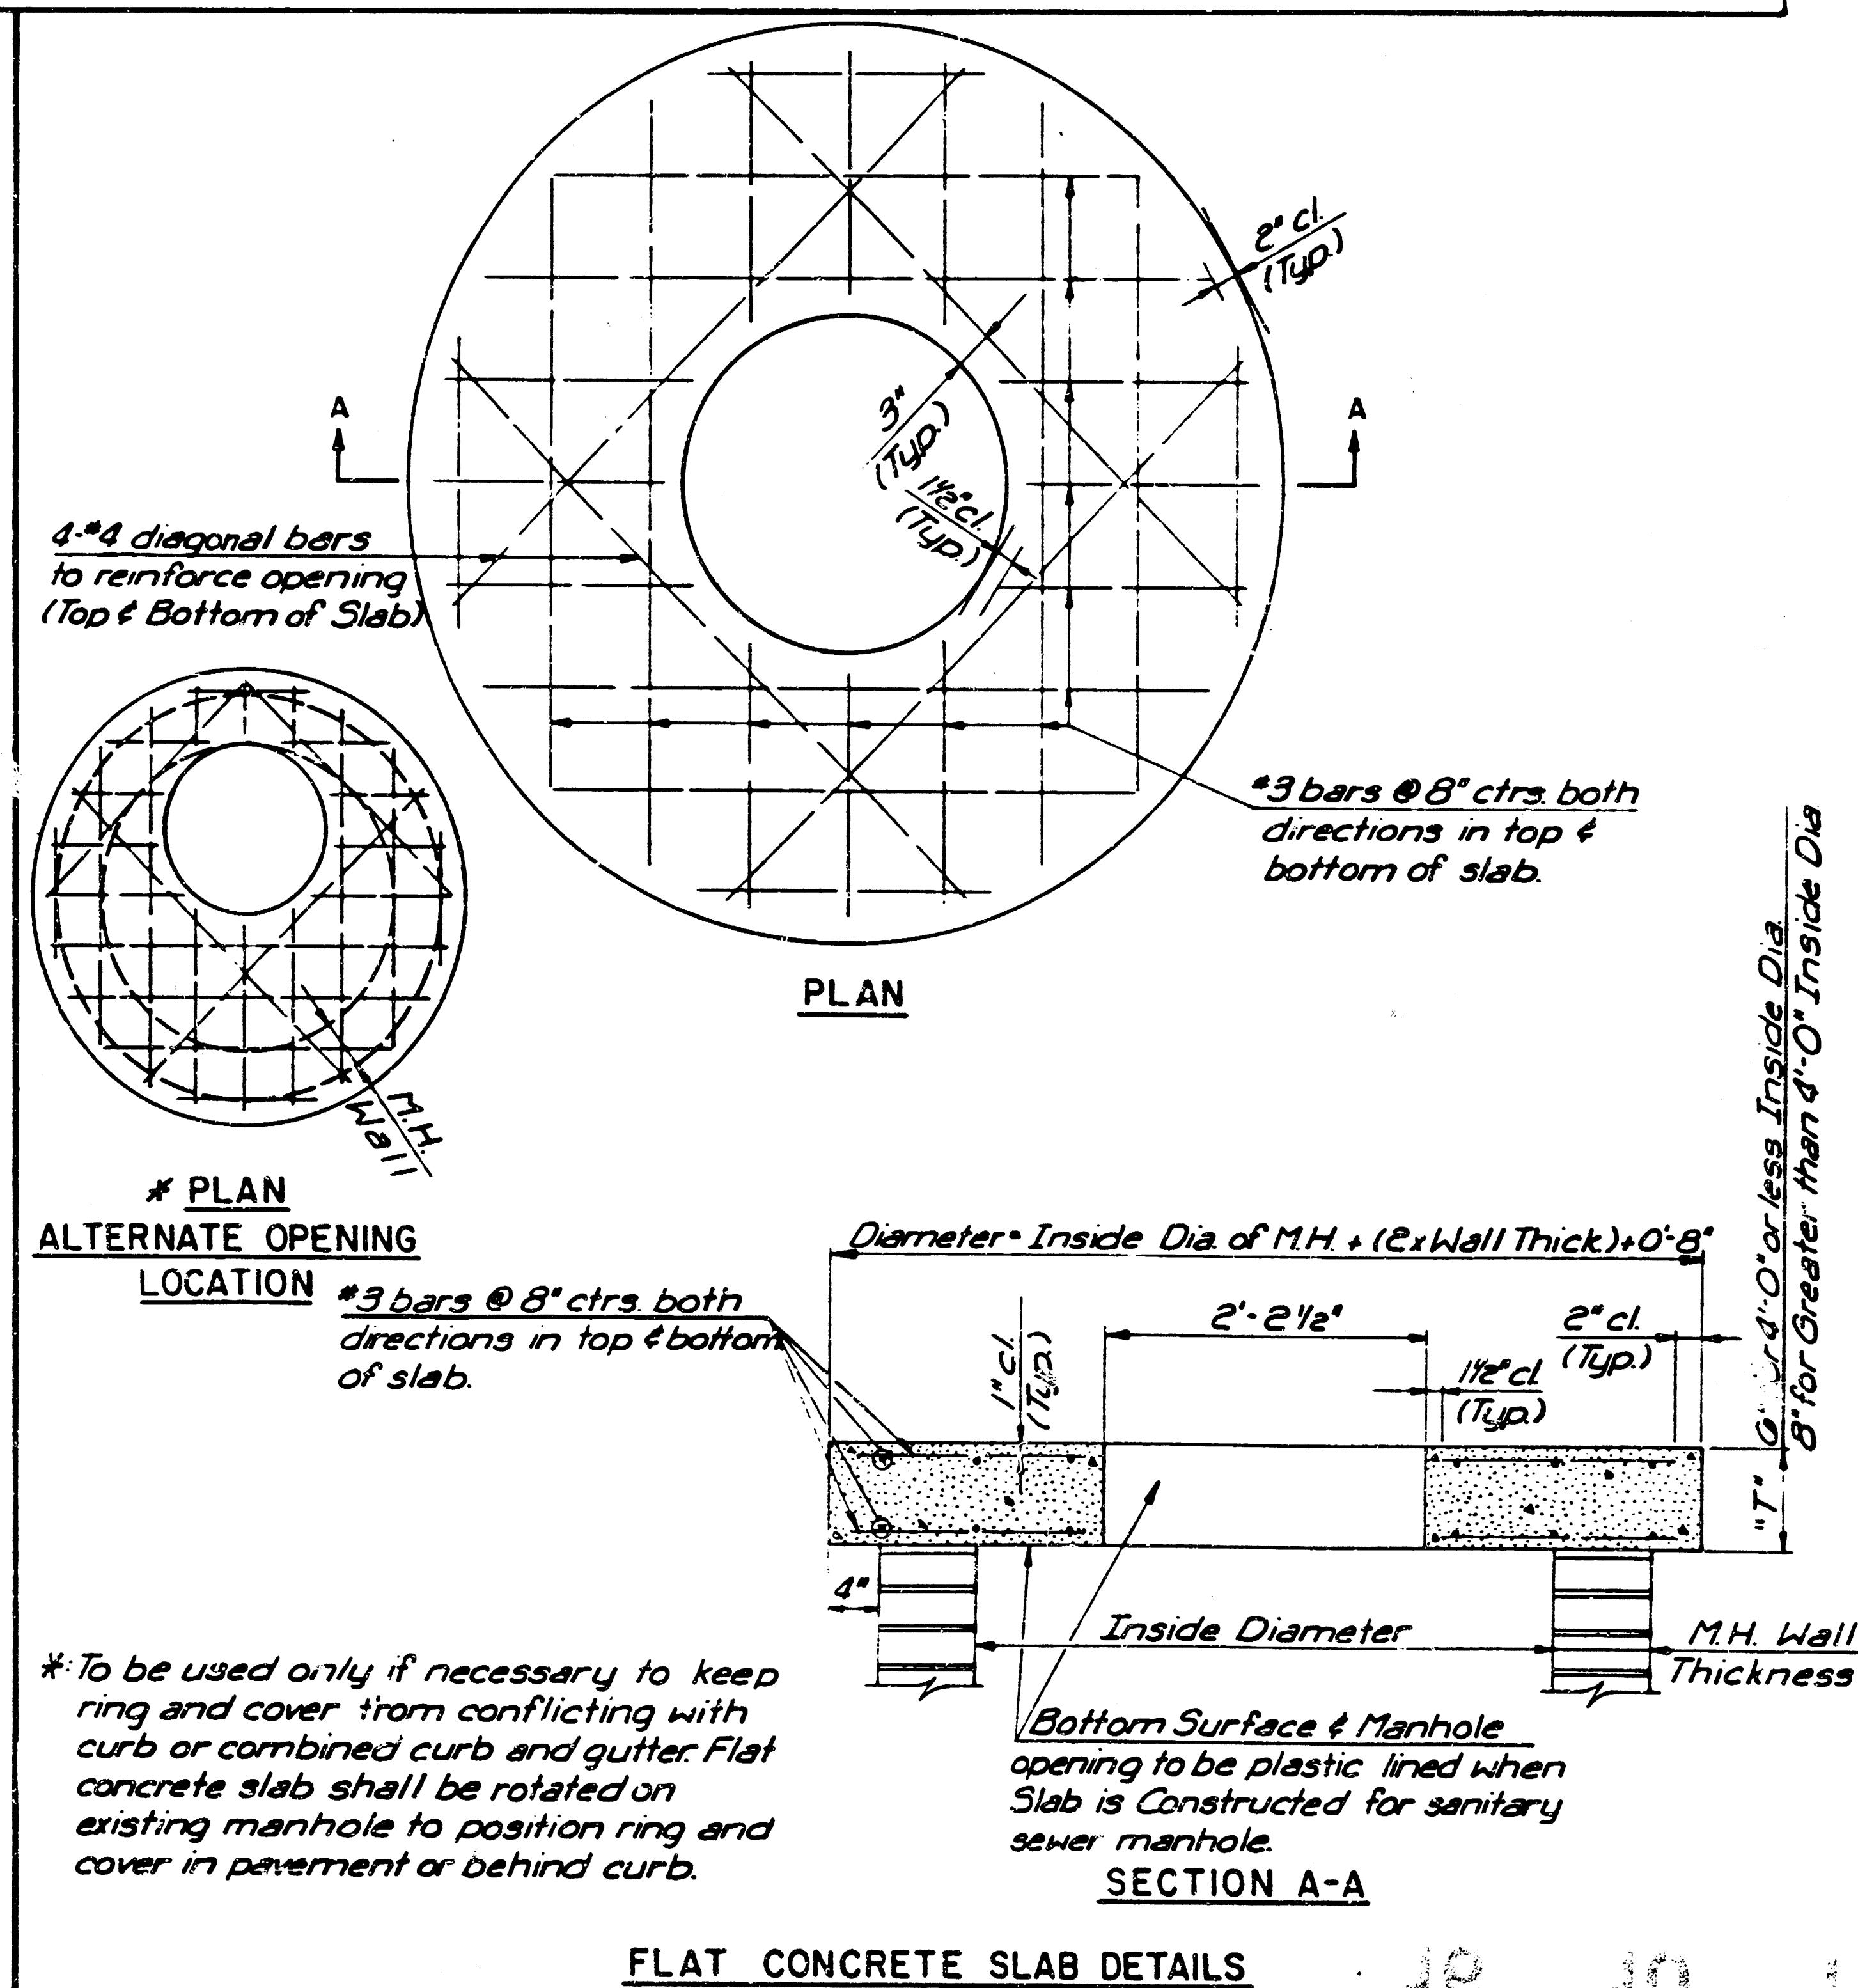

MANHOLE ADJUSTMENT DETAILS			
P.N. 472-76-245-81325-000-000-001			
CITY OF WICHITA, KANSAS			
M. E. LINDEBAK - CITY ENGINEER			
Designed by	Checked by		
Drawn by	Date	JOB No.	