

Drainage Report  
Fountain Square Addition  
MKEC Project 98130  
February 8, 1999

**Location**

The site is bounded on the southwest by Highway K-96, and on the east by Webb Road in the southeast quarter of Section 32, T26S, R2E. Adjacent lands include Comotara Industrial Park Fifth Addition and Mediterranean Plaza to the north, Casad Industrial Park to the west, and HPTCW Properties Trust to the south. Wichita Airport Authority/Jabara Airport lies east of the parcel across Webb Road.

The approximate dimensions of the parcel are 1,660 ft north-south, and 1,790 ft east-west. Highway K-96 removes part of the southwest quarter of the rectangle thus formed. The total area shown on the preliminary plat is 45.09 acres.

**Existing Site Conditions**

**Soils**

According to the NRCS (SCS) Sedgwick County Soil Survey, the site consists of approximately 2/3 Rosehill soils (Rd; silty clay, 1 to 3 percent slopes) and 1/3 Goessel soils (Gb; silty clay, 1 to 2 percent slopes). These soils are in gently sloping, moderately well drained to well drained areas on uplands, upland divides, and uneven side slopes. Both are classified as Hydrologic Soil Group (HSG) "D".

**Current Development**

The parcel is currently undeveloped. Adjacent parcels developed to date include HPTCW Properties Trust (Candlewood), Gorges Volvo, and Comotara Industrial Park Fifth Addition Lot 24 (W. K. Capital Enterprises). New construction is under way on Comotara Industrial Park Fifth Addition Lot 21 north of the site and on Casad Industrial Park (part of Mediterranean Plaza Addition) northwest of the site.

**Landform and Slope**

The site is near an upland divide. The USGS map of the area shows the beginnings of a channel. The general watershed slope is 1 to 3 percent.

**Drainage Conditions**

No portion of the site is included in a regulatory floodplain (FIRM Panel 15, City of Wichita, May 15, 1986). The nearest regulatory floodplain is a "Zone A" in the upper portion of Middle Branch Gypsum Creek. The deined A Zone ends near the intersection of Webb and 29<sup>th</sup> St, approximately 800 ft south of the site.

The drainage area on or affecting the site totals 57.4 acres. Slightly over 8 acres of the Comotara Industrial Park Fifth Addition south of 34<sup>th</sup> St. drains toward the site.

With the exception of the extreme southeast corner, runoff from the site is controlled. Watershed "A" discharges west toward existing detention at Casad Industrial Park. The remaining area flows to an existing 1.96 acre detention area along Highway K-96.

**Proposed Site Runoff Characteristics**

The proposed development is primarily commercial use, within the limitations of Limited Industrial zoning. Current runoff patterns will be essentially unchanged under proposed conditions. Runoff basin boundaries used in the analysis, overland flow directions, and preliminary storm sewer locations are shown on the Drainage and Utility Concept drawing. Following this report is a spreadsheet summarizing the Rational Formula analysis results for developed conditions.



Preliminary analysis indicates that total storage of approximately 12.7 acre-feet is required to maintain acceptable discharge flow rates. The 1.96 acre detention basin area, located near the center of the parcel's boundary with K-96, will be modified if required to provide the detention needs for most of the site. A small area in the southeast corner will continue to flow uncontrolled toward the south.

**Proposed Minimum Pad Elevation**

The minimum freeboard above the anticipated maximum 100-year water surface elevation in the detention basin will be two feet. The minimum building pad for this site will be 296.6 ft, City of Wichita Datum (1413.95 USGS). This minimum will be modified if necessary to reflect the final 100-year elevation in the detention basin.

FOUNTAIN SQUARE  
02/04/99

DRAINAGE AREA	AREA (ACRES)	ACCUM. AREA	C <sub>s</sub>	C <sub>100</sub>	T <sub>c</sub> (MIN)		I <sub>5</sub>	I <sub>100</sub>	Q <sub>5</sub>	Q <sub>100</sub>	RCP	%	INLET
					5	100							
Area "A"	11.92		0.85	0.92	15	15	4.56	7.37	46.7	80.8	36" RCP	@ 0.5%	Area Inlet
Area "B"	7.74		0.76	0.84	22.3	17.1	3.79	6.98	22.3	45.4	30" RCP	@ 0.3%	Area Inlet
Area "C"	22.24		0.85	0.92	17.2	15	4.29	7.37	82.1	150.8			4 Double/Double Drop Inlets
"B" and "C"	29.98		0.83	0.90	22.3	17.1	3.79	6.98	84.3	188.3	54" RCP	@ 0.23%	
Area "D"	3.14		0.87	0.91	15	15	4.56	7.37	12.5	21.1	24" RCP	@ 0.3%	Double Drop Inlet
Area "E"	5.20		0.87	0.91	15	15	4.56	7.37	20.6	34.9	30" RCP	@ 0.3%	2 Double Drop Inlets
"B", "C", "D" & "E"	38.32		0.84	0.90	22.3	17.1	3.79	6.98	122.0	240.7	72" RCP	@ 0.1%	
Lake	1.96		1.00	1.00	15	15	4.56	7.37	8.9	14.4			
"B", "C", "D", "E" & Lake	40.28		0.85	0.91	22.3	17.1	3.79	6.98	129.8	255.9	72" RCP	@ 0.1%	
Area "F"	5.20		0.87	0.91	15	15	4.56	7.37	20.6	34.9	30" RCP	@ 0.25%	2 Double Drop Inlets
Plus Lake													
Outlet Structure													

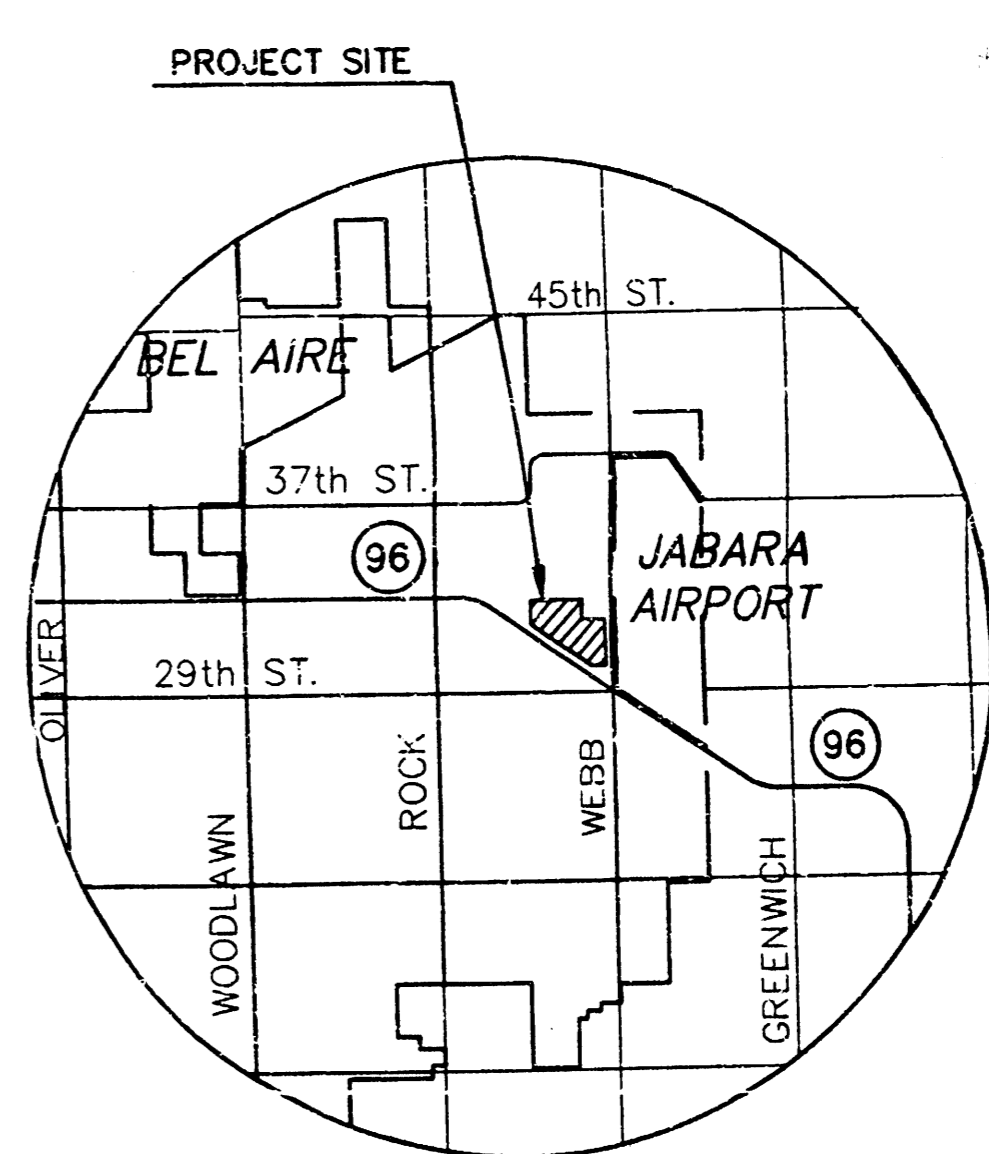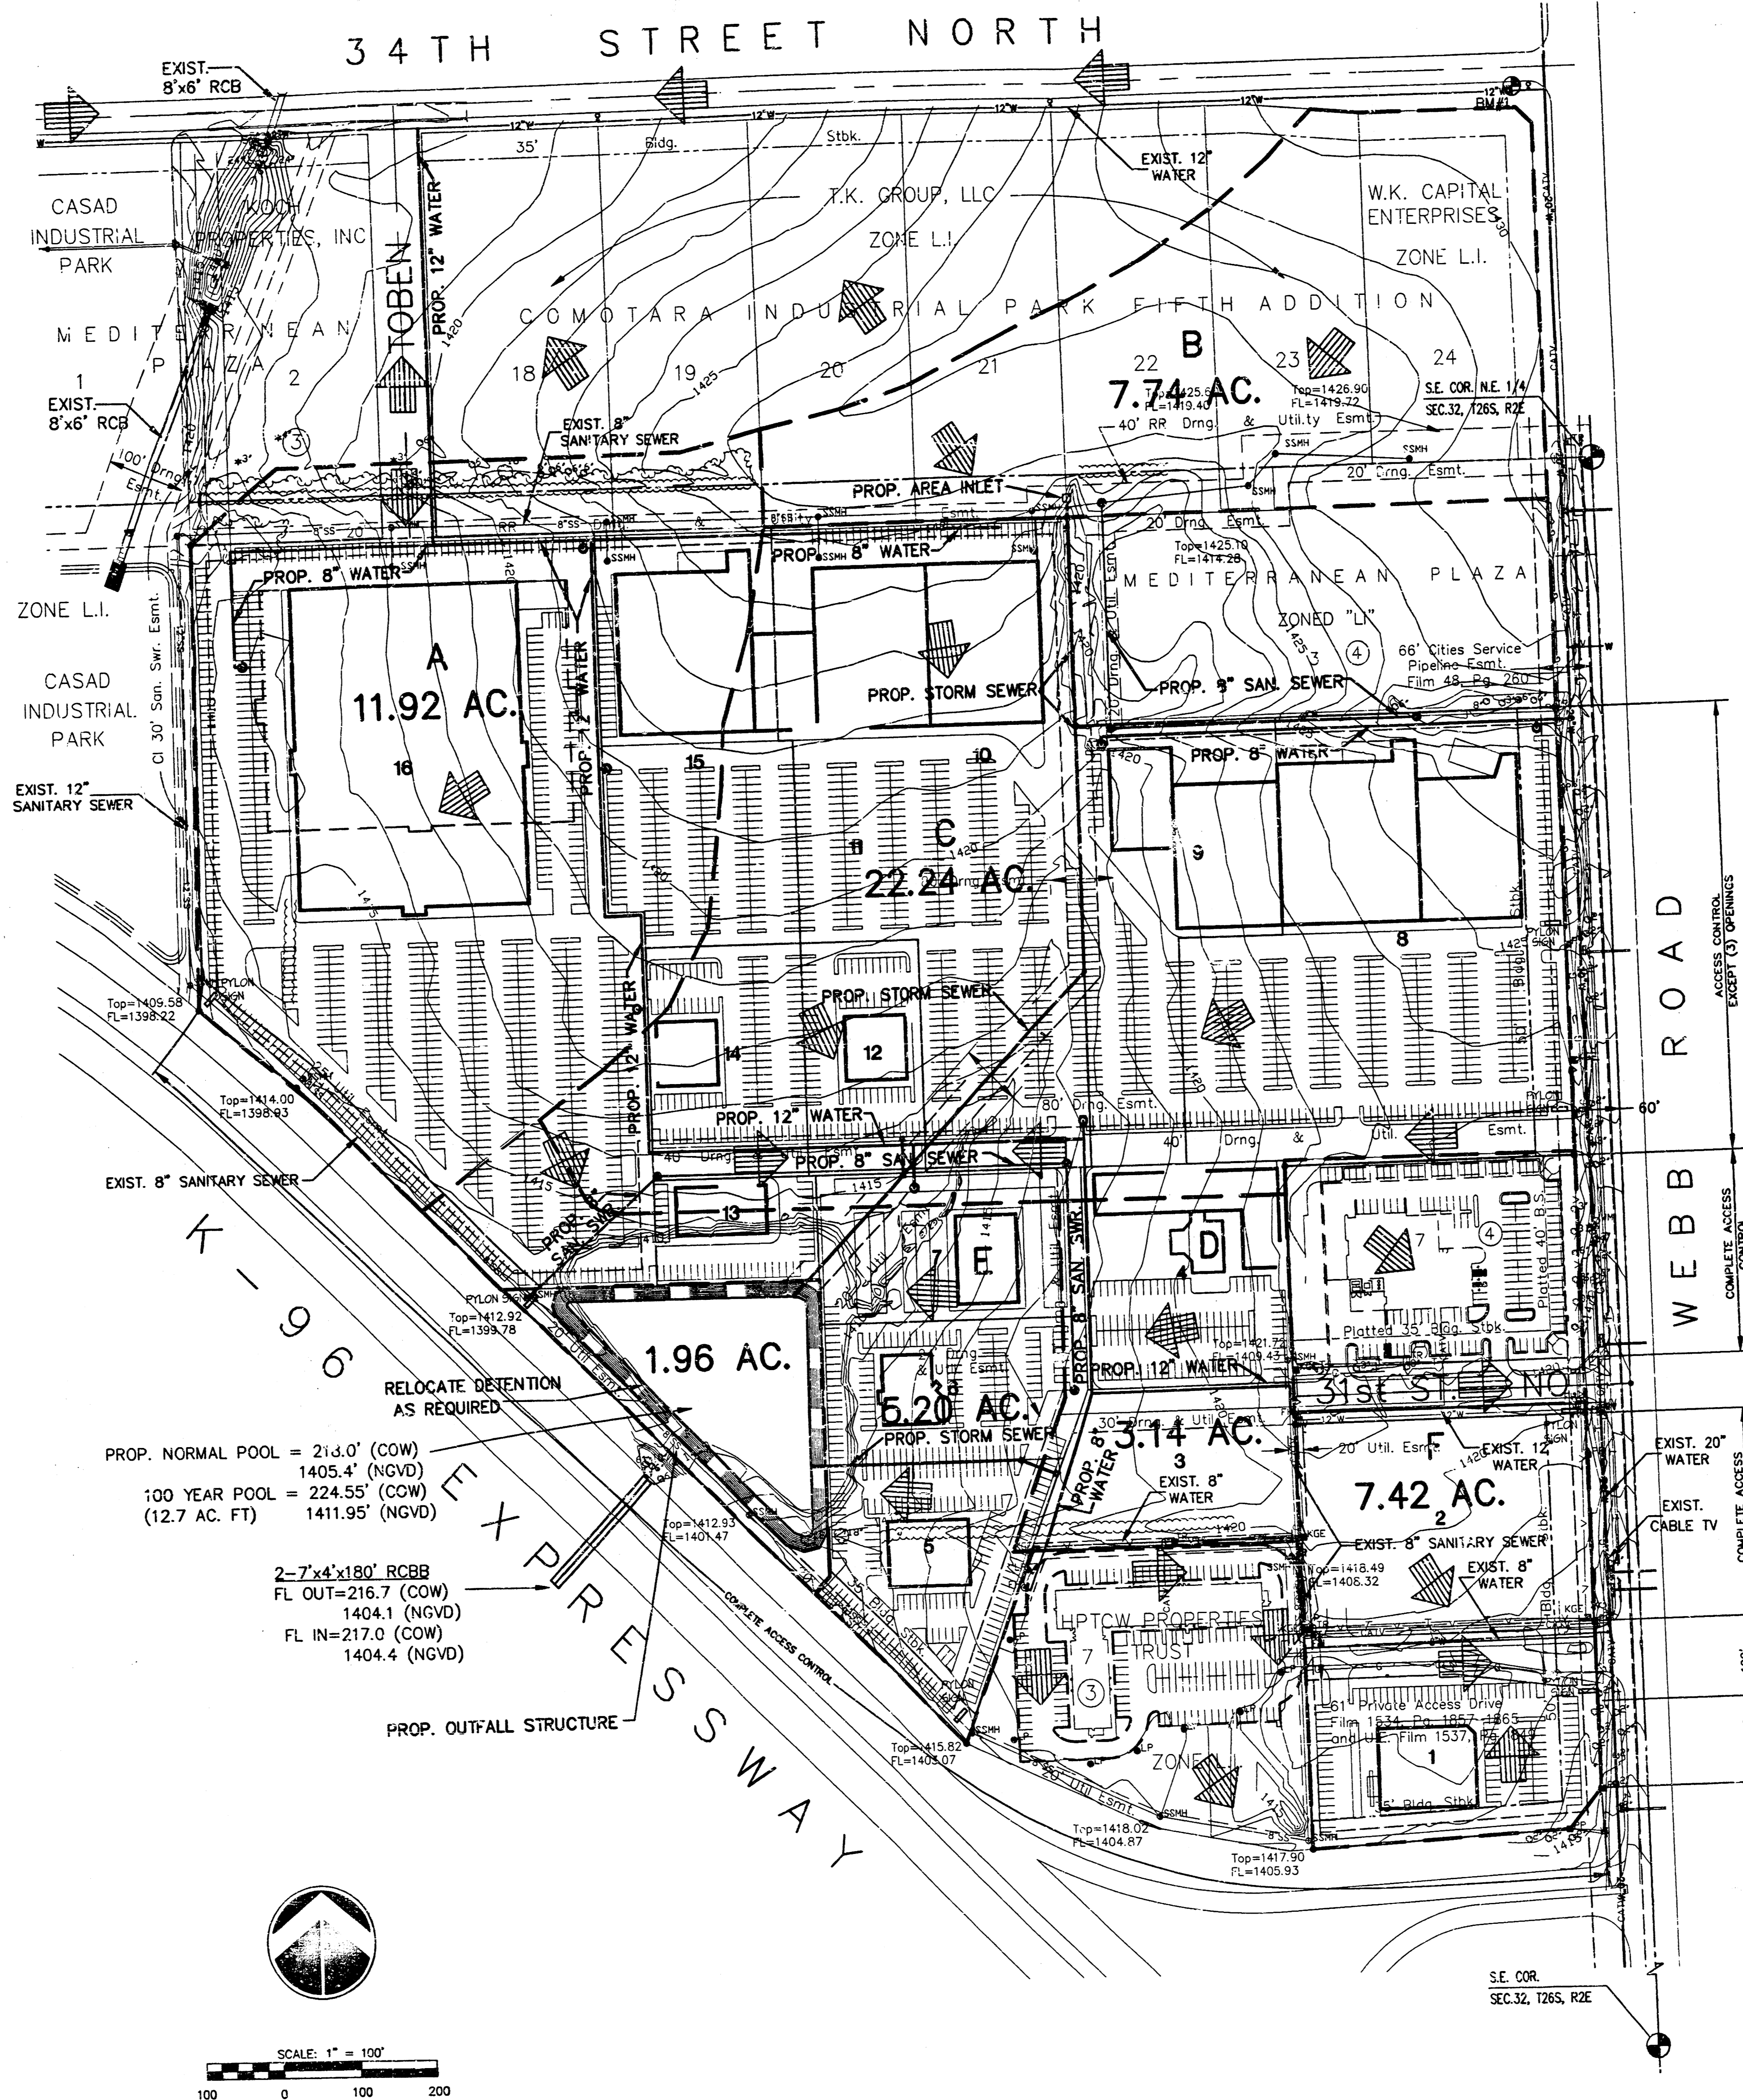

**VICINITY MAP**

**BENCHMARK**


BM#1 COW BENCHMARK, NW Cor. WEBB & 34TH ST. NO.  
 3' N. OF BACK OF CURB & 84' W OF CL OF WEBB  
 ELEV. = 244.18 (1431.58 U.S.G.S.)

**LEGEND**

- ⊙ IP IRON PIN
- ⊙ FH FIRE HYDRANT
- ⊙ WV WATER VALVE
- ⊙ RZ RISE
- ⊙ KE ELECTRIC
- ⊙ SSM SANITARY MANHOLE
- ⊙ LP LIGHT POLE
- ⊙ TR TRANSFORMER
- ⊙ PP POWER POLE
- W WATER LINE
- C CABLEVISION
- E ELECTRIC LINE
- T TELEPHONE LINE
- G GAS LINE

PROP. NORMAL POOL = 214.0' (COW)  
 1405.4' (NGVD)  
 100 YEAR POOL = 224.55' (CCW)  
 (12.7 AC. FT) 1411.95' (NGVD)

2-7'x4'x180' RCBB  
 FL OUT=216.7 (COW)  
 1404.1 (NGVD)  
 FL IN=217.0 (COW)  
 1404.4 (NGVD)

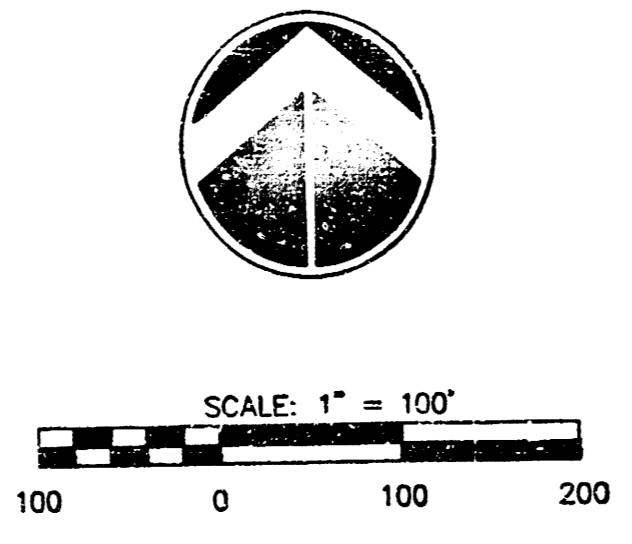

# DRAINAGE & UTILITY CONCEPT FOUNTAIN SQUARE ADDITION

OWNER: KOCH INDUSTRIES, 4111 E. 37TH STREET NORTH WICHITA, KS. 67220 (316) 828-5500  
 DEVELOPER: DELMAR REALTY INVESTORS, INC 15900 DOOLEY ROAD DALLAS, TEXAS 75244 (972) 702-0044 FAX: (972) 233-1501



© 2004 MID-KANSAS ENGINEERING CONSULTANTS, INC. MAY FEB 08 09 54 AM 1999  
 6. UTILITY AND DRAINAGE CONCEPTS FOR THE FOUNTAIN SQUARE ADDITION