

SUMMARY QUANTITIES (FOR INFO. ONLY)*		
Excavation	3130	Cu. Yds.
Compaction	2320	Cu. Yds.
60"x60" C.R.P.	840	Lin. Ft.
H.M.A. (Commercial Gr. (Class C))	105	Tons
Snow Fence w/T-Posts	660	Lin. Ft.

\* Quantities shown are based on the Typical Section shown on this sheet (for both pedestrian and contractor access).

**NOTE:**

The Contractor shall Construct and Maintain the Causeway/Pedestrian Crossing until the bridge is open to traffic.


The Pedestrian Crossing to be Surfaced with 4" Bituminous Surfacing (Commercial Grade).

The Contractor shall be responsible for replacing of the Crossing in the event of Wash-Outs.


The material, equipment, and labor necessary for the construction of the Crossing, shall not be paid for directly, but shall be subsidiary to the bid item "Pedestrian River Crossing".

The Contractor shall Eradicate the Temporary Crossing after completion of the bridge, the C.R.P.'s shall become the property of the Contractor and shall be removed from project site by the Contractor.

PLAN

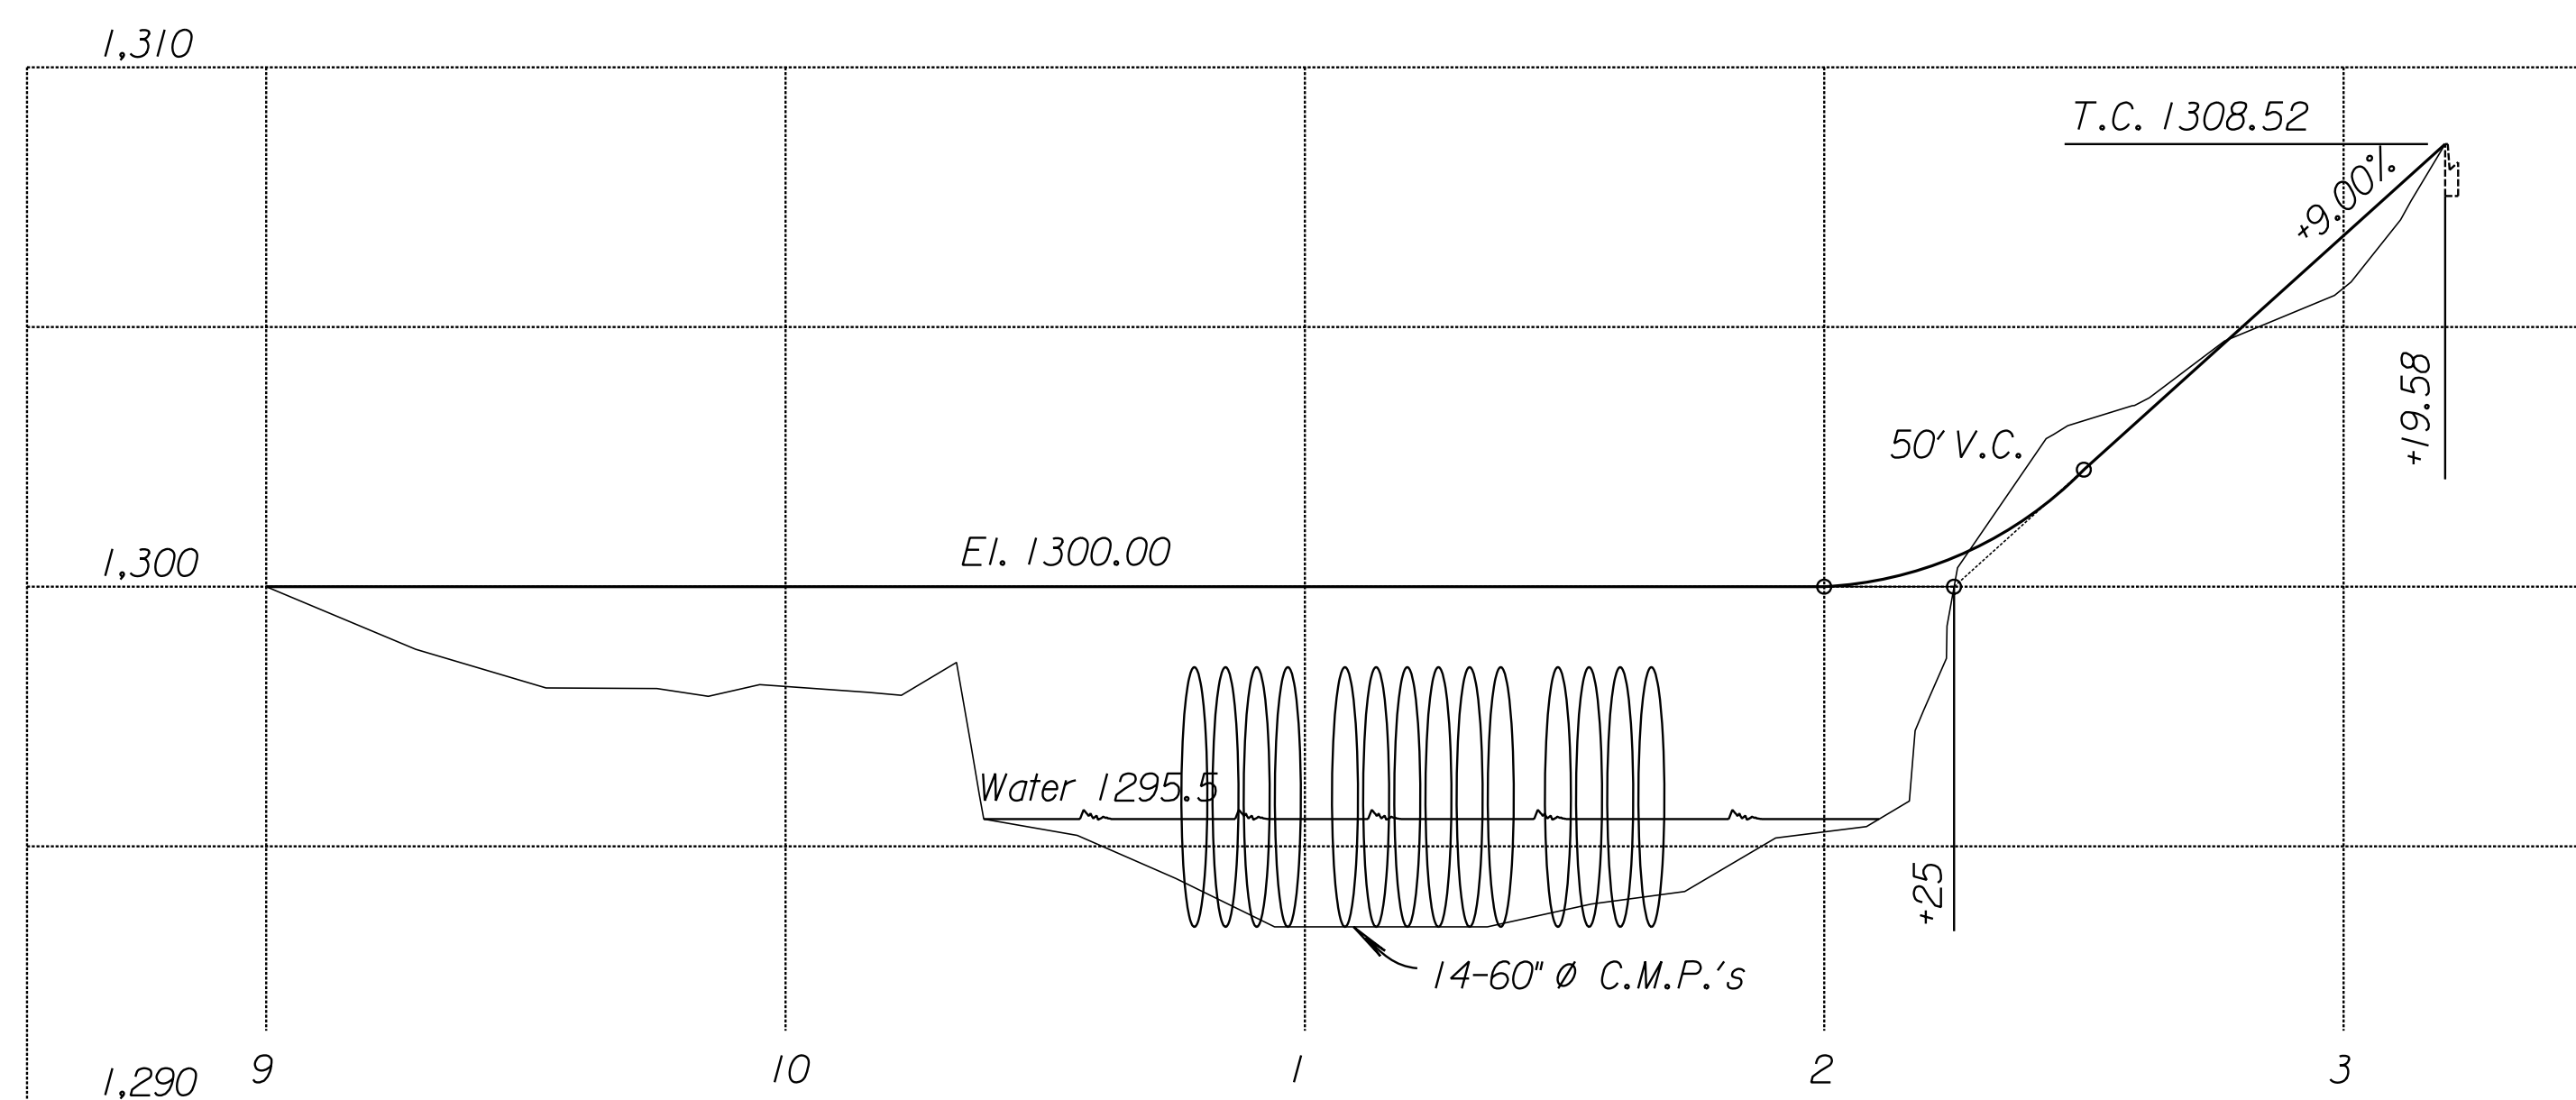

PROFILE

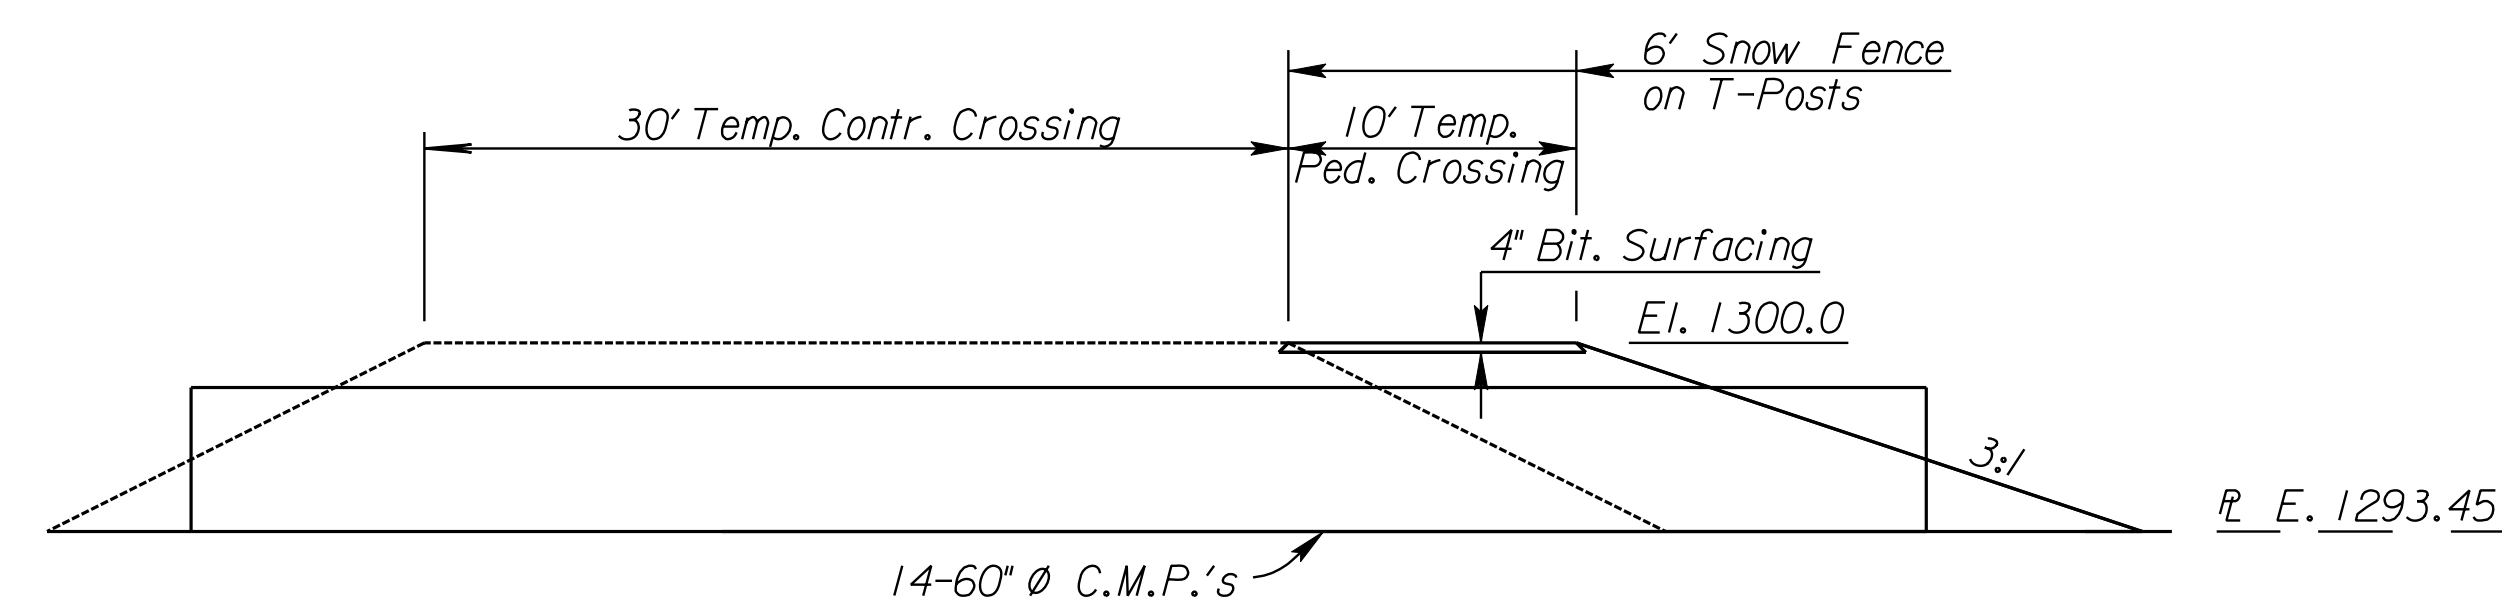

TYPICAL SECTION

CITY OF WICHITA JAMES ARMOUR, P.E., CITY ENGINEER 13TH STREET BRIDGE OVER LITTLE ARKANSAS RIVER <b>TEMPORARY PEDESTRIAN SIDEWALK</b>		
<b>PB PARSONS BRINCKERHOFF</b> Wichita, Kansas		
SCALE	DATE 11/8/2007	DWG NO. 35750A