STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
KANSAS	54–87 K–8258–08	2005	53	223

SCHEDULE OF INLETS & MANHOLES

STRUCT. NO.	STATION	LOCATION	OFFSET		GRATE INLET SPECIAL	GRATE INLET SPECIAL (2)	STD. TYPE P MH	PRE–CAST MH	CURB INLET TYPE 1A		DROP INLET		PIPE DATA									STRUCTURE INFO.						STORM SEWER – RCP (m)												Ht. Fill (m)	Remarks
													INFLOW PIPES						OUTFLOW PIPE																							
			DIST. (m)	SIDE					150x1500	150x3000			SIZE (mm)	FL EL.	SIZE (mm)	FL EL.	SIZE (mm)	FL EL.	SIZE (mm)	FL EL.	SLOPE (%)	TOP ELEV.	FLOOR ELEV.	H mm	W mm	L mm	STEPS (No.)	– (mm)	375 (mm)	450 (mm)	600 (mm)	750 (mm)	900 (mm)	1050 (mm)	1200 (mm)	1350 (mm)	1500 (mm)	1650 (mm)	2100 (mm)	– (mm)		
471	4+277.500	Kellogg	29.661	Lt.		1							–	–	–	–	–	–	375(S)	408.304	1.429%	409.679	–	–	–	–	–	–	0.7	–	–	–	–	–	–	–	–	–	–	
472	4+273.500	Kellogg	16.708	Lt.	1	–							–	–	–	–	–	–	375(SE)	407.641	0.706%	409.354	–	–	–	–	–	–	3.4	–	–	–	–	–	–	–	–	–	–	
473	4+277.500	Kellogg	1.000	Rt.	–	–	1						600(E)	407.693	–	–	–	–	600(N)	407.603	0.458%	409.760	–	–	–	–	–	–	–	15.5	–	–	–	–	–	–	–	–	–	–	
474	4+277.500	Kellogg	28.209	Lt.	–	–	1						600(S)	407.390	375(N)	408.294	–	–	600(N)	407.300	0.400%	409.740	–	–	–	–	–	–	–	2.0	–	–	–	–	–	–	–	–	–	–	
475	4+277.500	Kellogg	15.958	Lt.	–	–	1						600(S)	407.532	–	–	375(NW)	407.617	600(N)	407.442	0.482%	409.458	–	–	–	–	–	–	–	–	10.8	–	–	–	–	–	–	–	–	–	
481	4+320.000	Kellogg	1.000	Rt.	–	–	1						600(E)	408.006	375(N)	408.231	375(S)	408.310	600(W)	407.916	0.540%	409.496	–	–	–	–	–	–	–	–	41.0	–	–	–	–	–	–	–	–	–	
482	4+362.500	Kellogg	1.000	Rt.	–	–	1						450(E)	408.743	375(N)	408.818	375(S)	408.941	600(W)	408.503	1.212%	411.231	–	–	–	–	–	–	–	–	41.0	–	–	–	–	–	–	–	–	–	
483	4+405.000	Kellogg	1.000	Rt.	–	–	1						450(E)	409.523	375(N)	409.597	375(S)	409.714	450(W)	409.432	1.676%	411.965	–	–	–	–	–	–	–	–	–	41.1	–	–	–	–	–	–	–	–	
484	4+447.500	Kellogg	1.000	Rt.	–	–	1						375(E)	410.279	375(N)	410.279	375(S)	410.364	450(W)	410.114	1.431%	412.600	–	–	–	–	–	–	–	–	–	41.3	–	–	–	–	–	–	–	–	
485	4+490.000	Kellogg	1.000	Rt.	–	–	1						375(E)	410.796	375(N)	410.796	375(S)	410.836	375(W)	410.706	1.034%	413.072	–	–	–	–	–	–	41.3	–	–	–	–	–	–	–	–	–	–	
486	4+532.500	Kellogg	1.000	Rt.	–	–	1						–	–	375(N)	411.129	375(S)	411.147	375(W)	411.039	0.589%	413.380	–	–	–	–	–	–	41.3	–	–	–	–	–	–	–	–	–	–	
491	4+320.000	Kellogg	27.882	Lt.	–	1	–						–	–	–	–	–	–	375(S)	408.404	0.616%	409.967	–	–	–	–	–	–	28.1	–	–	–	–	–	–	–	–	–	–	
492	4+362.500	Kellogg	26.123	Lt.	–	1	–						–	–	–	–	–	–	375(S)	408.981	0.617%	410.694	–	–	–	–	–	–	26.4	–	–	–	–	–	–	–	–	–	–	
493	4+405.000	Kellogg	24.357	Lt.	–	1	–						–	–	–	–	–	–	375(S)	409.750	0.617%	411.463	–	–	–	–	–	–	24.8	–	–	–	–	–	–	–	–	–	–	
494	4+447.600	Kellogg	22.575	Lt.	–	1	–						–	–	–	–	–	–	375(S)	410.421	0.617%	412.134	–	–	–	–	–	–	23.0	–	–	–	–	–	–	–	–	–	–	
495	4+490.000	Kellogg	20.874	Lt.	–	1	–						–	–	–	–	–	–	375(S)	410.927	0.615%	412.640	–	–	–	–	–	–	21.3	–	–	–	–	–	–	–	–	–	–	
496	4+532.500	Kellogg	19.904	Lt.	–	1	–						–	–	–	–	–	–	375(S)	411.254	0.616%	412.967	–	–	–	–	–	–	20.3	–	–	–	–	–	–	–	–	–	–	
501	4+320.000	Kellogg	23.626	Rt.	–	1	–						–	–	–	–	–	–	375(N)	408.446	0.621%	410.009	–	–	–	–	–	–	21.9	–	–	–	–	–	–	–	–	–	–	
502	4+362.500	Kellogg	21.844	Rt.	–	1	–						–	–	–	–	–	–	375(N)	409.066	0.622%	410.779	–	–	–	–	–	–	20.1	–	–	–	–	–	–	–	–	–	–	
503	4+405.000	Kellogg	20.354	Rt.	–	1	–						–	–	–	–	–	–	375(N)	409.830	0.617%	411.543	–	–	–	–	–	–	18.8	–	–	–	–	–	–	–	–	–	–	
504	4+447.500	Kellogg	19.768	Rt.	–	1	–						–	–	–	–	–	–	375(N)	410.477	0.621%	412.190	–	–	–	–	–	–	18.2	–	–	–	–	–	–	–	–	–	–	
505	4+490.000	Kellogg	19.768	Rt.	–	1	–						–	–	–	–	–	–	375(N)	410.949	0.621%	412.662	–	–	–	–	–	–	18.2	–	–	–	–	–	–	–	–	–	–	
506	4+532.500	Kellogg	19.768	Rt.	–	1	–						–	–	–	–	–	–	375(N)	411.260	0.621%	412.970	–	–	–	–	–	–	18.2	–	–	–	–	–	–	–	–	–	–	
521	4+815.200	Kellogg	22.059*	Lt.	–	–	1						–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
522	4+776.670	Kellogg	20.443*	Lt.	–	–	1						–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
523	4+776.670	Kellogg	1.000	Rt.	–	–	1						450(W)	407.591	375(S)	408.871	–	–	600(N)	407.501	3.500%	412.006	–	–	–	–	–	–	–	–	22.1	–	–	–	–	–	–	–	–	–	
524	4+735.000	Kellogg	1.000	Rt.	–	–	1						450(W)	409.091	375(S)	410.231	375(N)	410.231	450(E)	409.001	3.500%	412.611	–	–	–	–	–	–	–	40.3	–	–	–	–	–	–	–	–	–	–	
525	4+695.000	Kellogg	1.000	Rt.	–	–	1						375(W)	410.614	375(S)	410.704	375(N)	410.704	450(E)	410.449	3.500%	413.056	–	–	–	–	–	–	–	38.8	–	–	–	–	–	–	–	–	–	–	
526	4+655.000	Kellogg	1.000	Rt.	–	–	1						–	–	375(S)	411.010	375(N)	411.010	375(E)	410.920	0.789%	413.357	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
532	4+815.200	Kellogg	23.504	Lt.	–	1	–						–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
533	4+776.670	Kellogg	21.893	Lt.	–	1	–						–	–	–	–	–	–	375(S)	409.841	1.429%	411.554	–	–	–	–	–	–	0.70	–	–	–	–	–	–	–	–	–	–	
534	4+735.000	Kellogg	20.415	Lt.	–	1	–						–	–	–	–	–	–	375(S)	410.475	1.173%	412.188	–	–	–	–	–	–	20.8	–	–	–	–	–	–	–	–	–	–	
535	4+695.000	Kellogg	19.791	Lt.	–	1	–						–	–	–	–	–	–	375(S)	410.932	1.129%	412.645	–	–	–	–	–	–	20.2	–	–	–	–	–	–	–	–	–	–	
536	4+655.000	Kellogg	19.757	Lt.	–	1	–						–	–	–	–	–	–	375(S)	411.234	1.109%	412.947	–	–	–	–	–	–	20.2	–	–	–	–	–	–	–	–	–	–	
542	4+815.200	Kellogg	28.759	Rt.	–	1	–						–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
543	4+776.670	Kellogg	27.168	Rt.	–	1	–						–	–	–	–	–	–	375(N)	409.760	3.500%	411.472	–	–	–	–	–	–	25.4	–	–	–	–	–	–	–	–	–	–	
544	4+735.000	Kellogg	25.300	Rt.	–	1	–						–	–	–	–	–	–	375(N)	410.377	0.616%	412.090	–	–	–	–	–	–	23.7	–	–	–	–	–	–	–	–	–	–	
545	4+695.000	Kellogg	23.487	Rt.	–	1	–						–	–	–	–	–	–	375(N)	410.859	0.711%	412.572	–	–	–	–	–	–	21.8	–	–	–	–	–	–	–	–	–	–	
546	4+655.000	Kellogg	21.571	Rt.	–	1	–						–	–	–	–	–	–	375(N)	411.198	0.940%	412.911	–	–	–	–	–	–	20.0	–	–	–	–	–	–	–	–	–	–	
		TOTALS			1	23	15	–	–	–	–																		537.6	161.5	132.4	–	–	–	–	–	–	–	–	–	

* OFFSET IS TO ℄ MANHOLE

NOTE: STORM SEWER PIPE SHALL BE CLASS III REINFORCED CONCRETE PIPE IN ACCORDANCE WITH THE CITY OF WICHITA STANDARD SPECIFICATIONS.

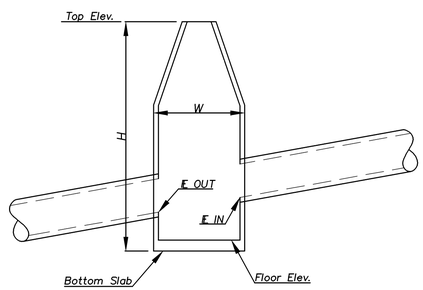

STRUCTURE INFO.

CFS Cook, Flatt & Strobel ENGINEERS, P.A.

KANSAS DEPARTMENT OF TRANSPORTATION

SCHEDULE OF INLETS & MANHOLES

Wichita, Kansas — Sedgwick, Co.

DATE | BY | REFERENCE NOTED | REFERENCE CHECKED

SCALE | Plotted: | Drawn by: | File:

J:\00011ph2\KELLOGG ROCK TO END\053 SCHEDULE OF INLETS.dwg 7/14/2005 11:52:11 AM CDT