



LEGEND:
 Fill

The geology shown is the best information available to the Kansas Department of Transportation.

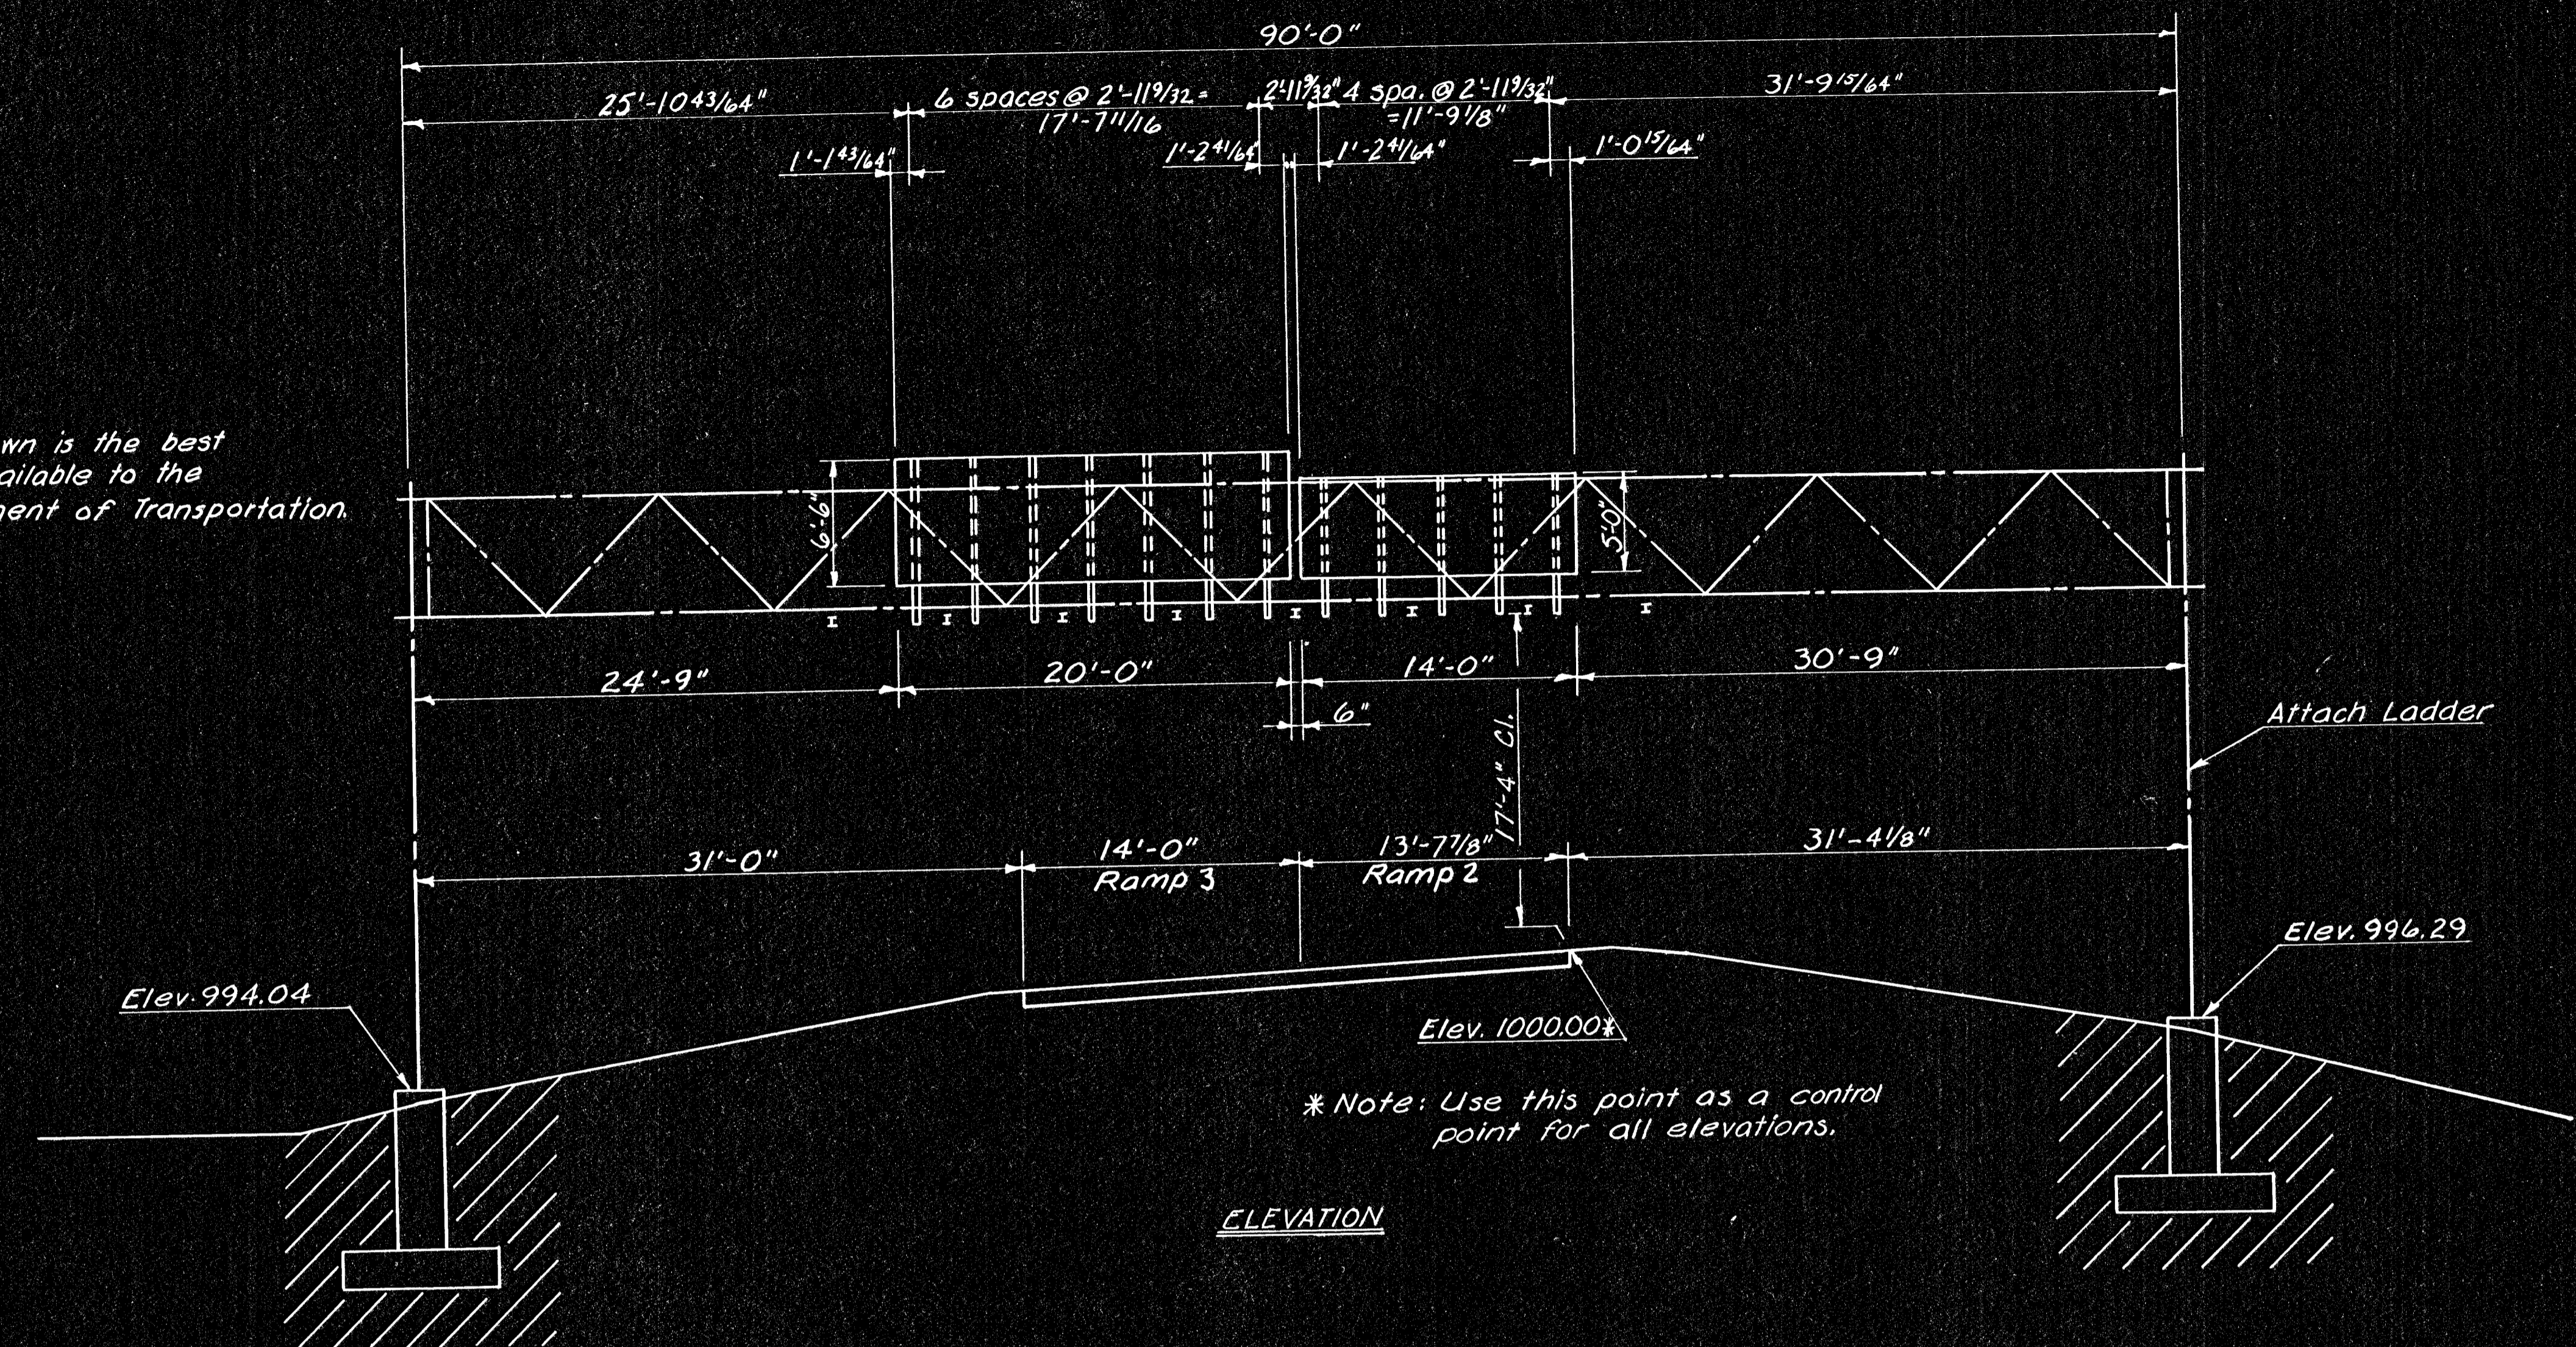

* Note: Use this point as a control point for all elevations.

ELEVATION

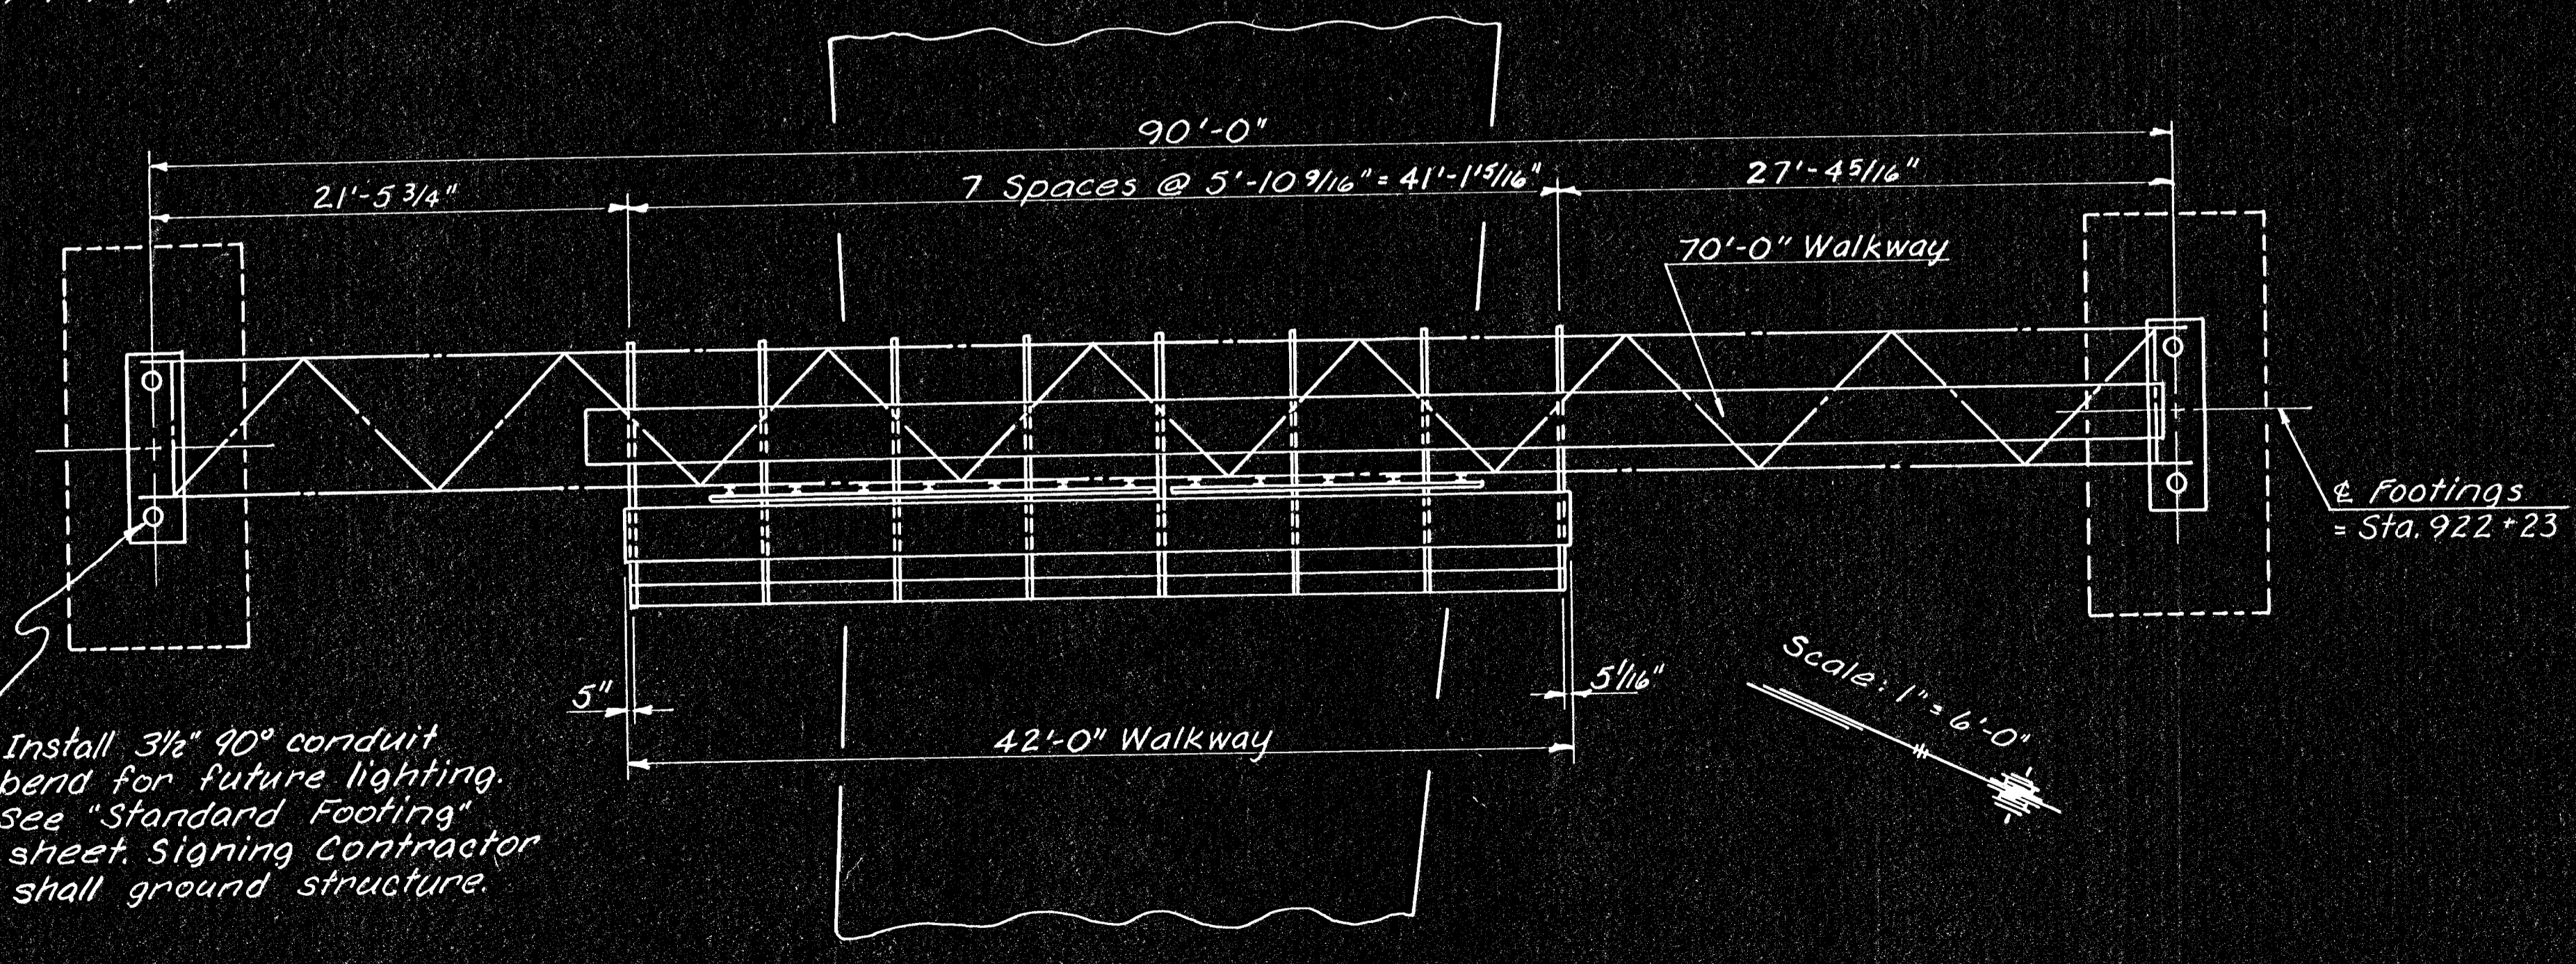

Install 3/2" 90° conduit bend for future lighting, see "Standard Footing" sheet. Signing Contractor shall ground structure.

PLAN

DETAILS ALUMINUM ALTERNATE	
Truss	Member 1 Wall thickness .250"
	Member 2 Wall thickness .226"
	N = 15 X = 10 2/32" S = 5' 10 9/16" Camber = 1 1/4"
End	Member 1 Wall thickness .365"
	Member 2 Wall thickness .237"
Supports	Left N = 4 S = 5' 7 1/2" L = 30' 6 1/2"
	Right N = 3 S = 6'-9" L = 28' 3 1/2"
Footings	Left Type E Right Type E

NO.	DATE	REVISIONS	BY	APP'D
3				
2				
1				

KANSAS DEPARTMENT OF TRANSPORTATION
 RAMP 3 STA. 922+23
 CONSTRUCTION LAYOUT AND GEOLOGY
 OVERHEAD SIGN STRUCTURE
 ALUMINUM ALTERNATE
 PROJ. NO. (BC)96-87-K044-1(28) SEDGWICK CO.

SHEET NO. 101 OF 143	SCALE	APPRO	QUANTITIES	TRACED S.A.
DESIGNED L.E.S.	DETAILS L.E.S.	QUAN. CK.	TRACE CK. L.E.S.	
DESIGN CK. D.R.E.	DETAIL CK. D.R.E.			