


FIJWA REGION NO.	STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
7	KANSAS	(BC)96-87-K044-1 (28)	1978	115	143

GENERAL NOTES

PAYMENT: The cost of all material and labor needed to construct its footing shall be included in the unit price bid for each Cantilever Type Overhead Sign Support.



TYPICAL EXCAVATION DETAILS

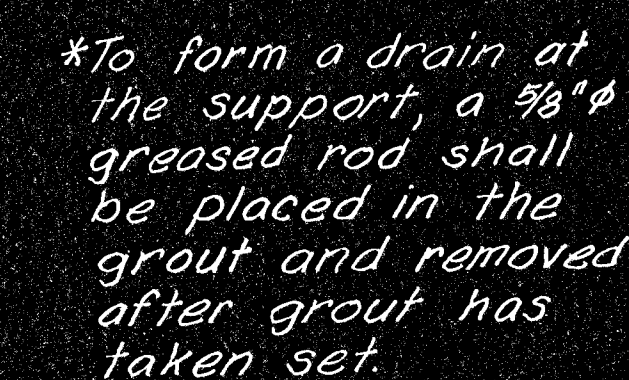


FOOTING PLAN



BENDING DIAGRAM


Technical drawings of reinforcement bars for a concrete slab:

- Top View:** A rectangular bar with a width of 2'-6" and a height of 2'-6". The bar is labeled *t1 bar*, *t2 bar*, *t3 bar*, and *t4 bar*.
- Side View:** A U-shaped bar with a vertical leg of 2'-5" and a horizontal leg of 5'-8". The bar is labeled *u1 bar*.
- Front View:** A stepped bar with a total width of 2'-6", a total height of 4'-2 3/4", and a sloped section of 1'-5 1/8" at a 2'-0 3/4" horizontal distance. The bar is labeled *u2 bar*.

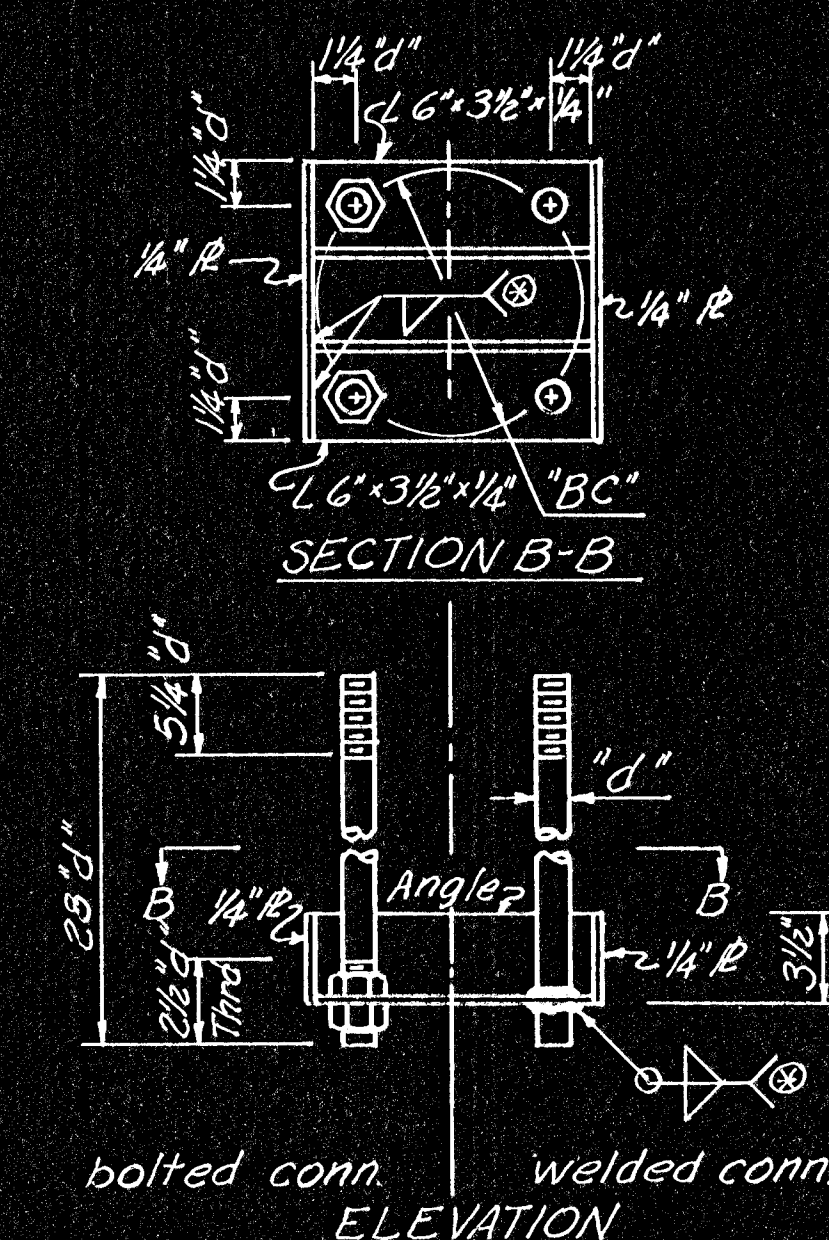

ANCHOR BOLT ASSEMBLY DETAIL

⊗ 1/4" weld - typ.

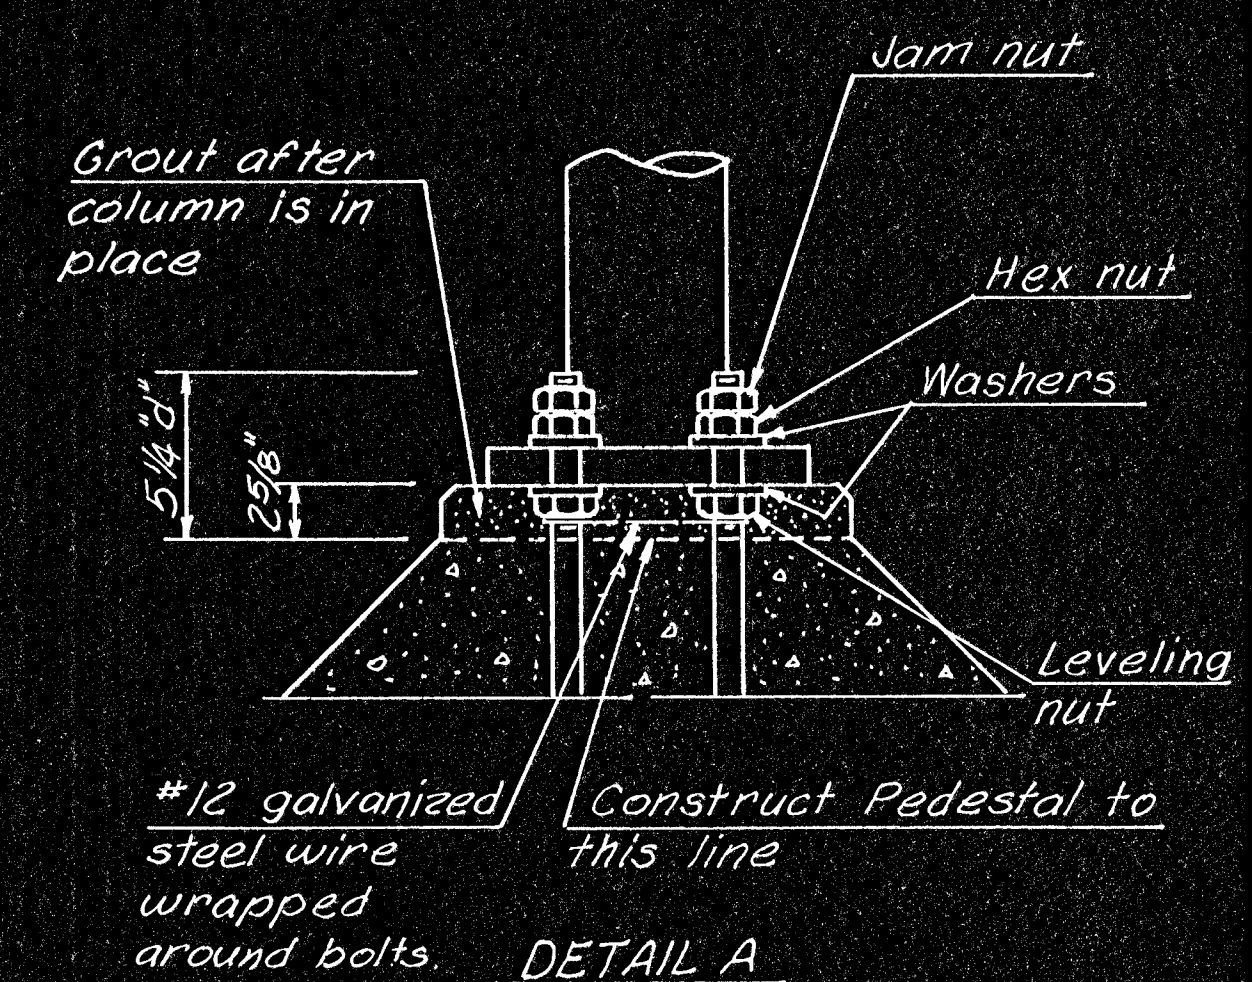

3				
2				
1				
NO.	DATE	REVISIONS	BY	APP'D

DEPARTMENT OF TRANSPORTATION - KANSAS

STANDARD STRUCTURAL SIGN SUPPORTS
CANTILEVER TYPE OVERHEAD
FOOTING DETAILS

8-75

SHEET NO. <i>115</i> OF <i>113</i>		SCALE	<i>LES</i>	APP'D	QUANTITIES	<i>LES</i>	TRACED
DESIGNED	<i>LES</i>	DETAILED	<i>LES</i>	QUAN.	CK.	<i>DRE</i>	TRACE CK.
CHECKED	<i>DRE</i>	DETAIL CK.	<i>DRE</i>				