


REMOVE EXISTING SPLIT RAIL FENCE. DO NOT REPLACE. SUBSIDIARY TO BID ITEM FOR "SITE CLEARING AND RESTORATION".



REGRADE 440 L.F. EXISTING DITCH TO 0.68% WITH A 3" FLAT BOTTOM. SUBSIDIARY BID ITEM FOR "EXCAVATION".

TREES ALONG NORTH LINE OF PLAT SHALL BE TRIMMED ONLY AS NECESSARY FOR CONSTRUCTION. TREES SHALL BE SAWCUT TO PROVIDE BEST CHANCE OF SURVIVAL. WORK SHALL BE SUBSIDIARY TO BID ITEM FOR "SITE CLEARING AND RESTORATION".



EXCESS EXCAVATION SHALL BE PLACED AS BERMS AT THE REAR OF LOTS 1-3, BLOCK 3. THE BERMS SHALL NOT BLOCK DRAINAGE AND SHALL BE A MIN. OF 3' IN HEIGHT.

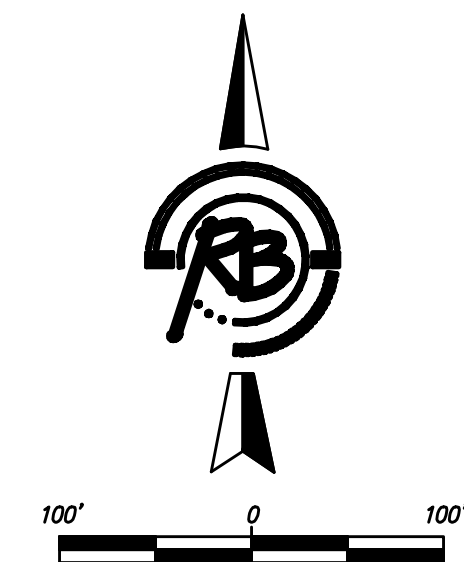

EARTHWORK QUANTITIES
(FOR INFORMATION ONLY)
CUT: 67140 C.Y.
FILL: 65800 C.Y.

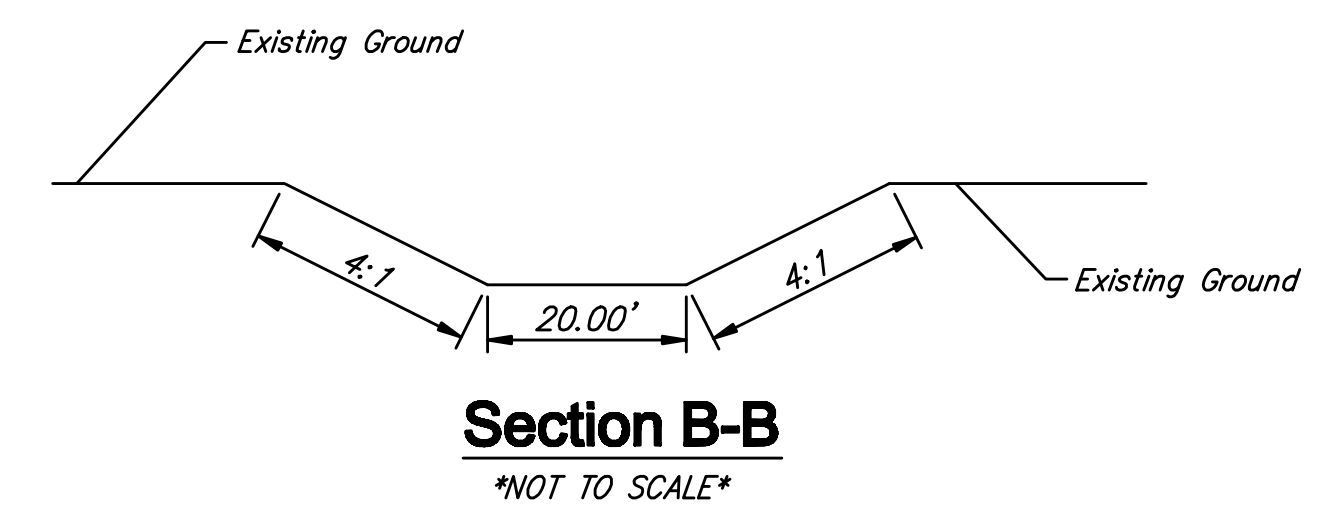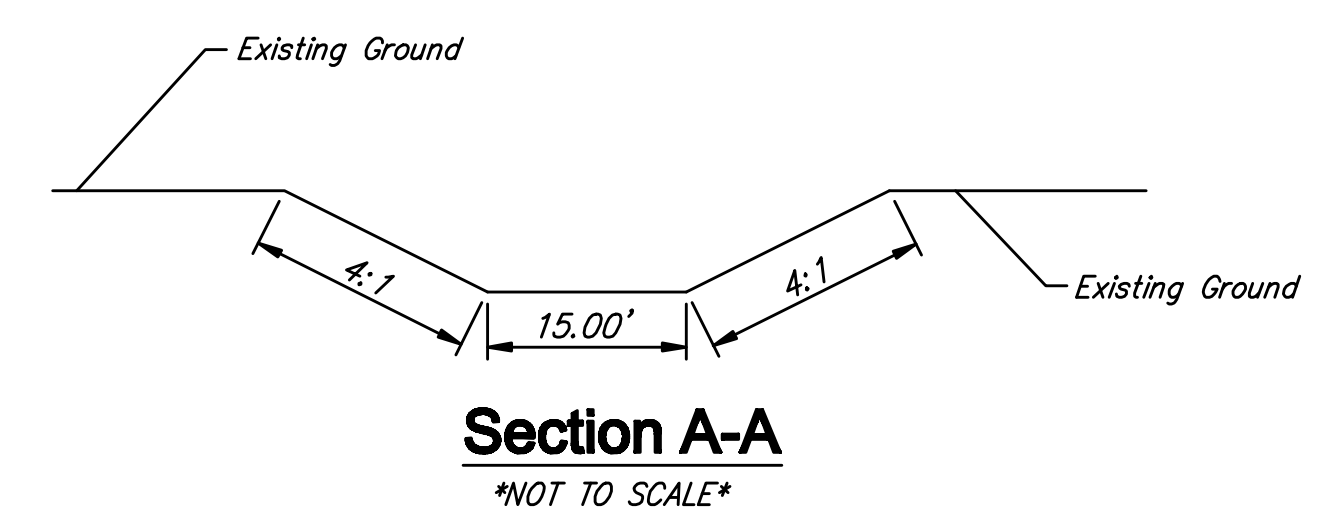

Strip soil to a depth 9" below existing ground beneath berm areas and re-compact to 95% Standard Density. Cost of stripping and re-compact incidental to the bid item for Excavation.

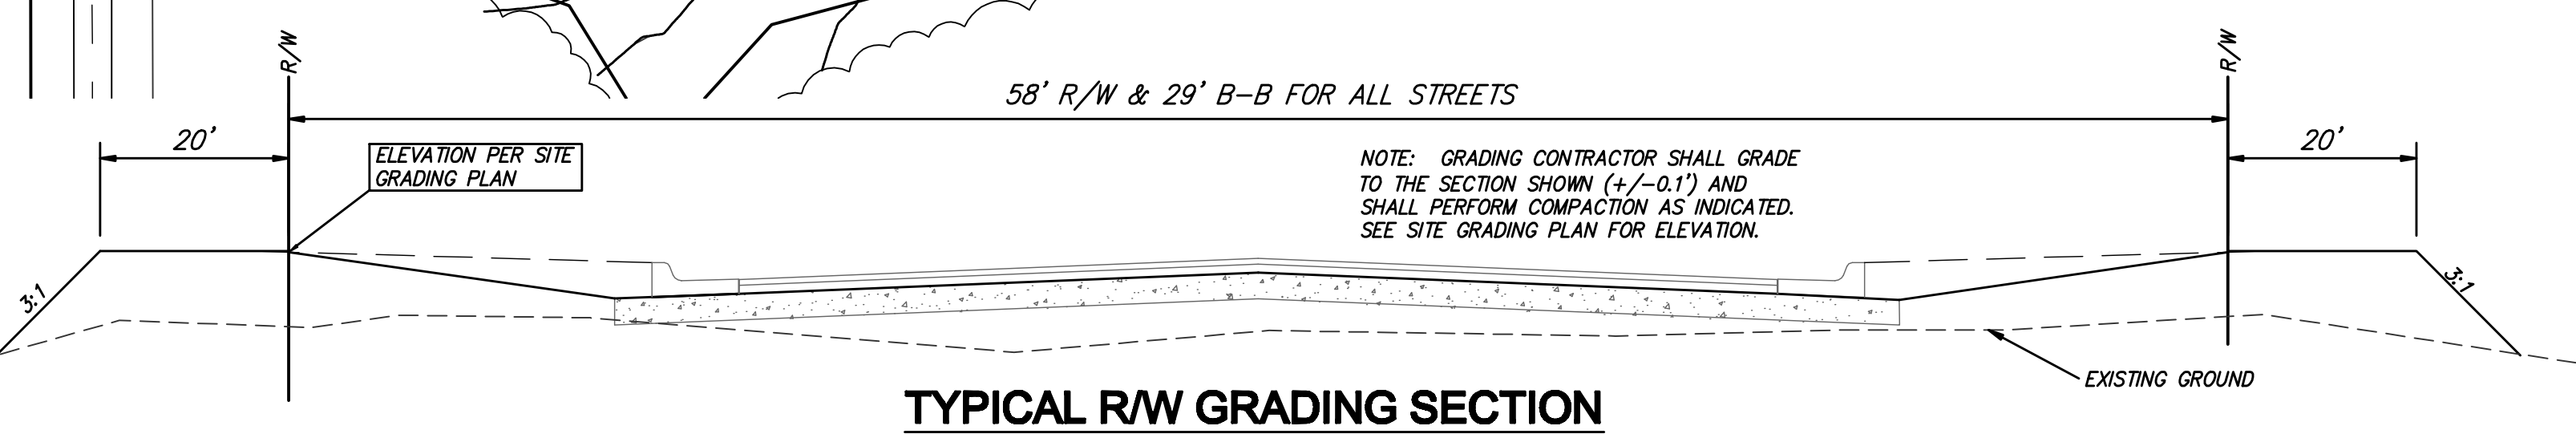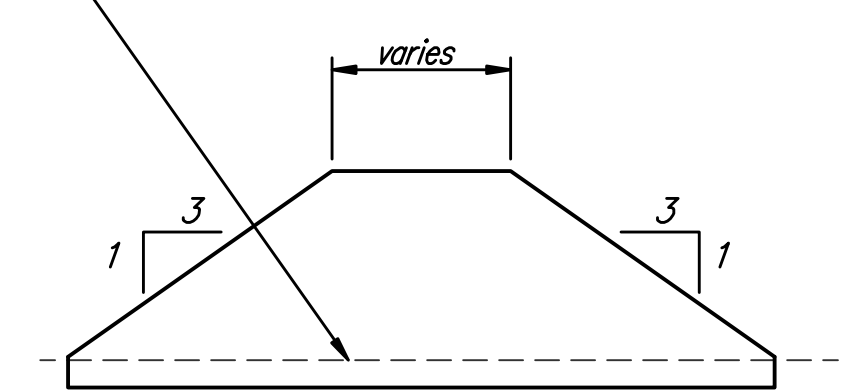

NOTE: GRADING CONTRACTOR SHALL GRADE TO THE SECTION SHOWN (+/-0.1') AND SHALL PERFORM COMPACTION AS INDICATED. SEE SITE GRADING PLAN FOR ELEVATION.

TYPICAL BERM SECTION

CAMBRIA ADDITION GRADING PLAN WICHITA, KANSAS		DATE	3/19/08
Ruggles & Bohm, P.A. Engineering, Surveying, Land Planning		SCALE	AS SHOWN
834 North Main Wichita, Kansas 67203 www.rbkansas.com		PROJECT	2
(913) 264-8888 (913) 264-4821 fax E-mail: info@rbkansas.com		DATE	Feb. 20, 2008
PROJECT FILE	SWD Plan01 {Pond 1}	PROJECT NUMBER	468-84481
		DATE	Feb. 20, 2008