

B.M. 10165 R.R. Spike N. face light pole. So. side 31st St 100' W. of E. West St.  
 B.M. 10462 \*GO Spike E. face 4th p. pole N. of 31st St. E. W. side West St.


**\*SECTIONS\* STA 0+00 STD M.H. TYPE "B"**  
 NOTE: All exposed conc pipe surface to be protected with plastic lining as approved by the field engineer. Method of removing the top of 6" R.C.P. is to be approved by the field engineer.

NOTE: Outside of brick manhole of Sta 0+00 shall be given two coats of Bitumastic Super Service Black as manufactured by Koppers chemicals and coatings, or an approved equal. Application shall be according to manufacturer's recommendations.  
 WYO-BOND BENTONITE as manufactured by Archer Daniels Midland Co. or an approved equal shall be mixed with the backfill material lying below water table elevation of the manhole location at Sta 0+00. Approximately 40 pounds of Bentonite is to be uniformly mixed with the backfill material.

**NOTE TO CONTRACTOR**  
 This project will be constructed under the supervision of the CITY ENGINEER and conforming to the SPECIFICATIONS of the CITY OF WICHITA. The CONTRACTOR will reimburse the City of Wichita for all cost of Engineering, Plans, and Inspection.

PLAN SCALE 1"=80'  
 PROFILE 1"=20' HORIZ  
 1"=5' VERT

WICHITA, KANSAS  
 PROFESSIONAL ENGINEER  
 6363

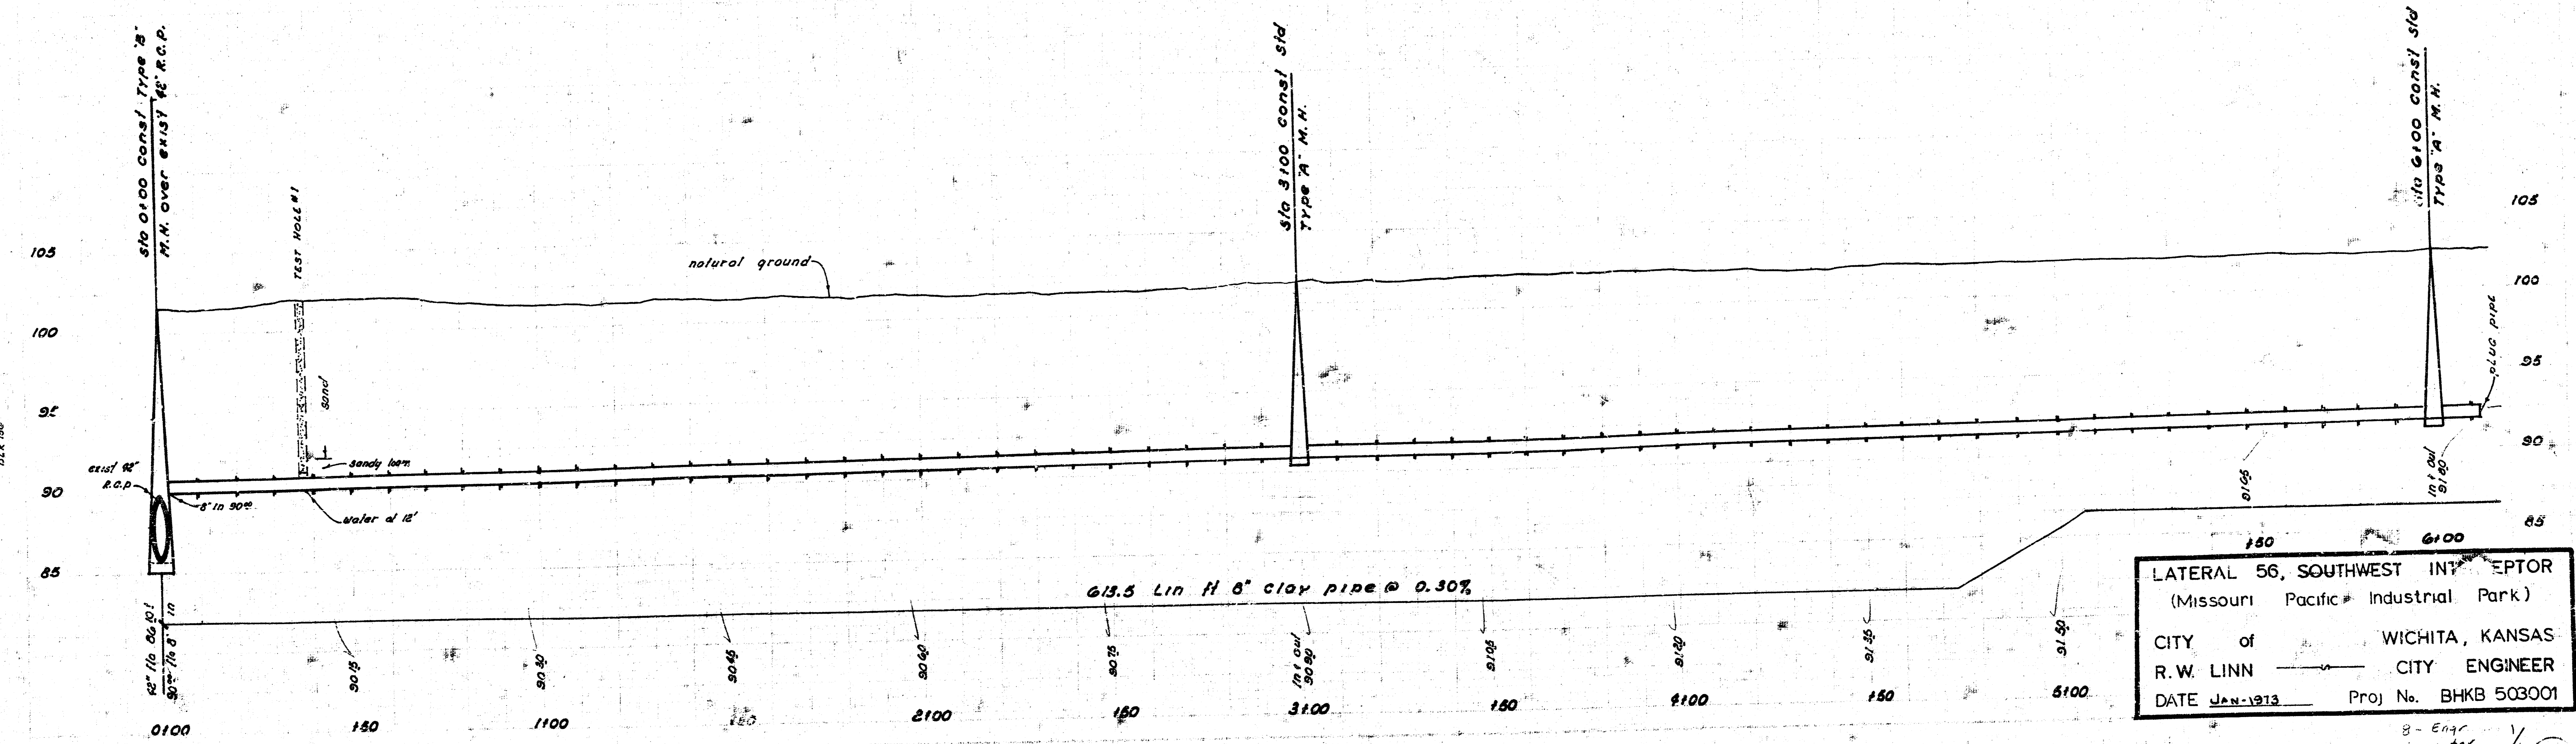

LATERAL 56, SOUTHWEST INDUSTRIAL PARK  
 (Missouri Pacific Industrial Park)  
 CITY of WICHITA, KANSAS  
 R.W. LINN CITY ENGINEER  
 DATE JAN-1913 Proj No. BHKB 503001

8-Eng  
 1-Water