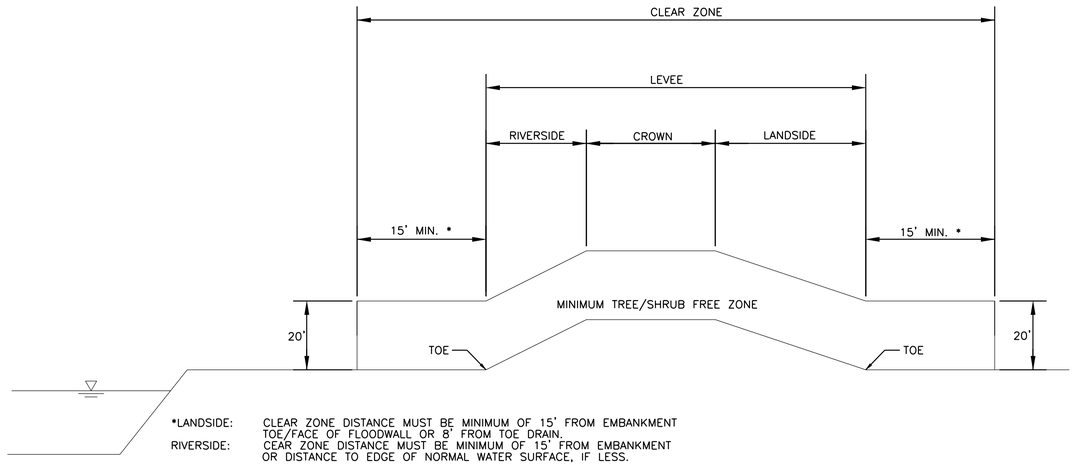

*LANDSIDE: CLEAR ZONE DISTANCE MUST BE MINIMUM OF 15' FROM EMBANKMENT TOE/FACE OF FLOODWALL OR 8' FROM TOE DRAIN.
RIVERSIDE: CEAR ZONE DISTANCE MUST BE MINIMUM OF 15' FROM EMBANKMENT OR DISTANCE TO EDGE OF NORMAL WATER SURFACE, IF LESS.

ROOTBALL EXTRACTION IS NOT REQUIRED OUTSIDE "CLEAR ZONE". OUTSIDE THE "CLEAR ZONE" TREES MAYBE CUT FLUSH WITH GROUND SURFACE AND TREATED TO PREVENT FUTURE GROWTH.

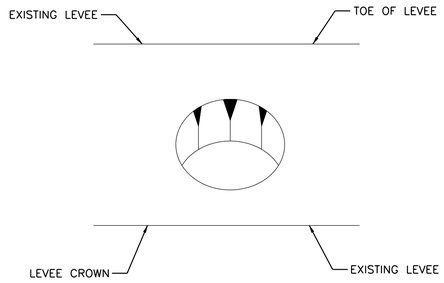

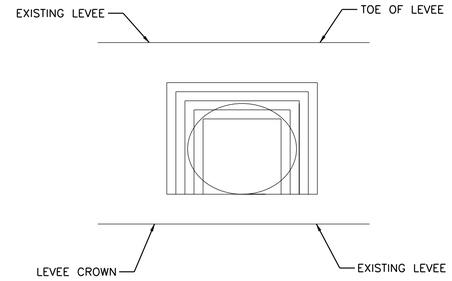

PLAN VIEW OF TREE REMOVAL
N.T.S.

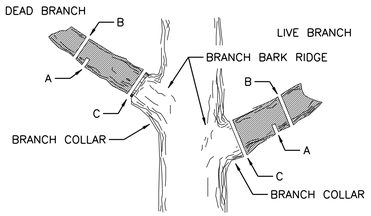

FIRST, CUT PART WAY THROUGH THE BRANCH AT A; THEN CUT IT OFF AT B. MAKE THE FINAL CUT C.

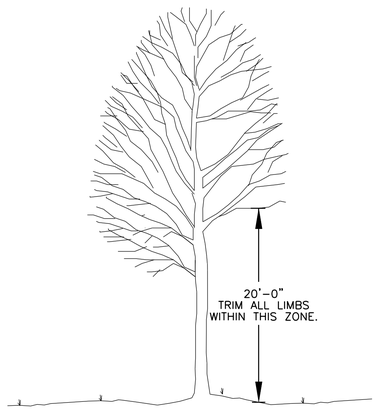

TREE TRIMMING DETAIL
N.T.S.

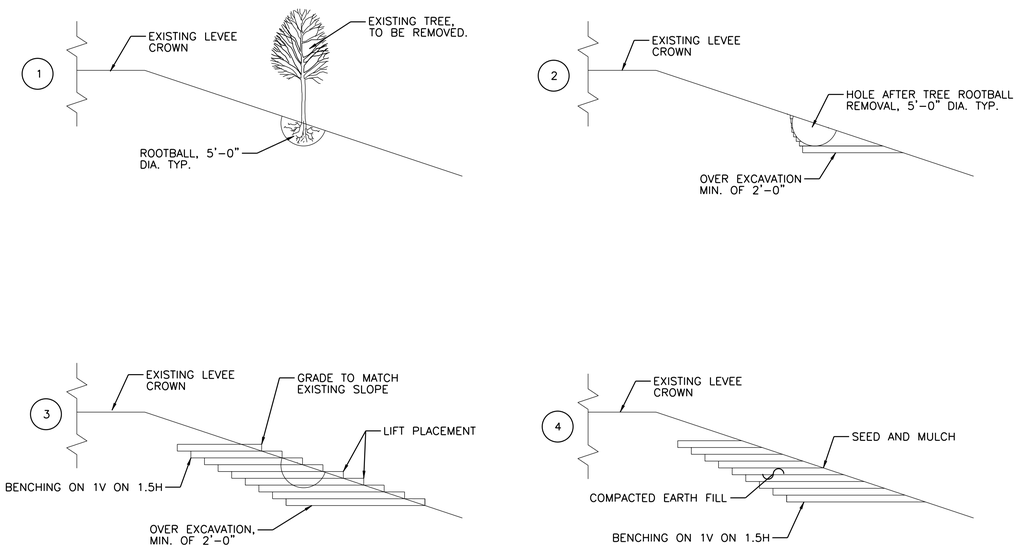

TYPICAL TREE REMOVAL FROM EXISTING LEVEE – SEQUENCE OF WORK
N.T.S.

MARK	DESCRIPTION	DATE	APPR

amec
AMEC Earth & Environmental, Inc.
1129 SW Wanamaker
Topeka, Kansas 66604
Phone: (785) 272-4600
Fax: (785) 272-4678

CITY OF WICHITA

SYSTEMWIDE VEGETATION MAINTENANCE - PHASE 1
WICHITA-VALLEY CENTER LOCAL FLOOD PROTECTION PROJECT
WICHITA, KANSAS

PREPARED FOR
THE CITY OF WICHITA, KANSAS
455 N. Main
Wichita, KS 67202

LAWRENCE J. SAMPLE
LICENSED
15955
5-28-10
KANSAS
PROFESSIONAL ENGINEER

DESIGNED BY: Larry Sample, PE		DATE: 5-28-2010
DWN BY: DSM	CKD BY: LBK	APP BY: L. SAMPLE
FILE NAME: 561500000-GI-103.dgn		
AMEC PROJ. NO. 5-6150-0000		

TREE REMOVAL DETAILS

G-1.03
SHEET 4 OF 38