

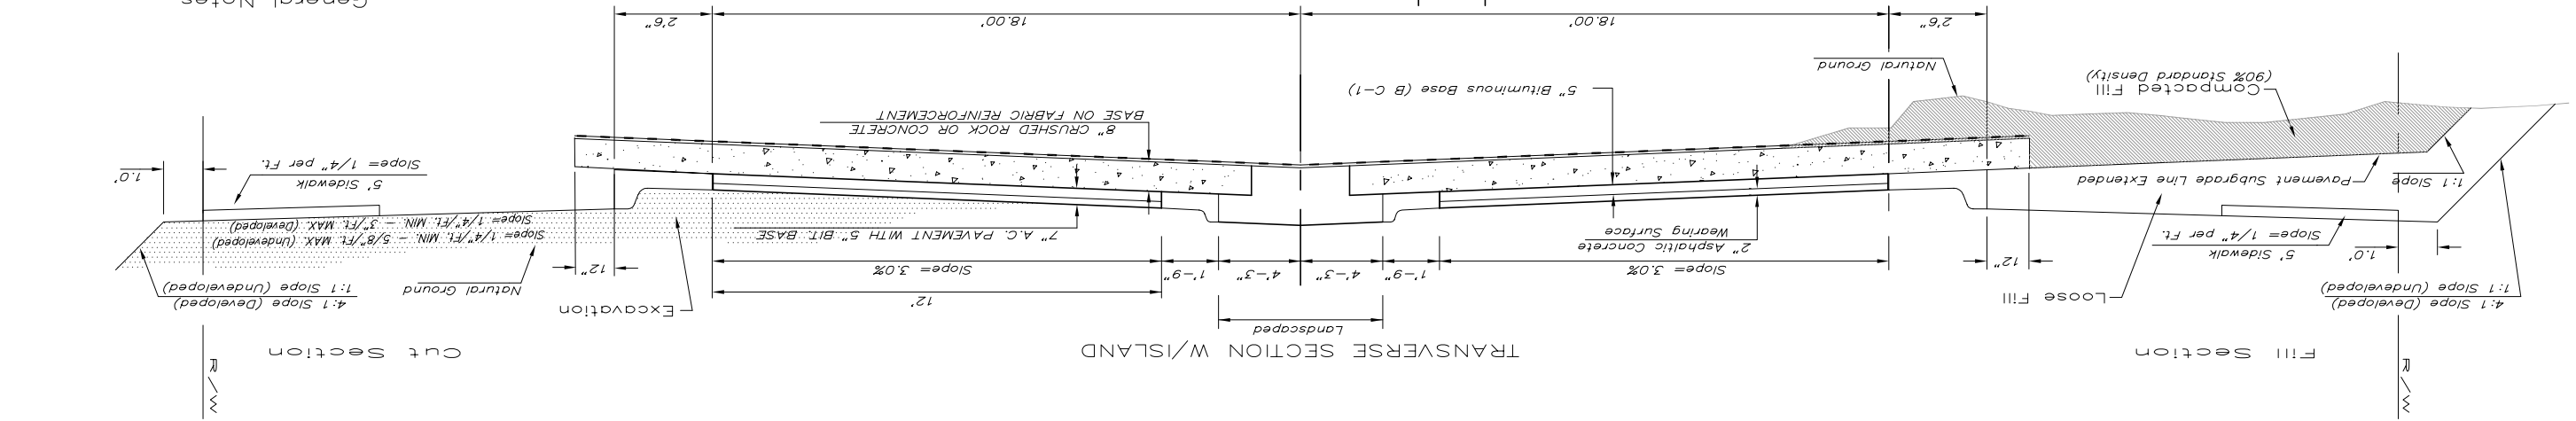


TYPICAL B-B PAVEMENT DETAILS


7	KANSAS	87 N-0301-01	2003	3	36
RHM		PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS

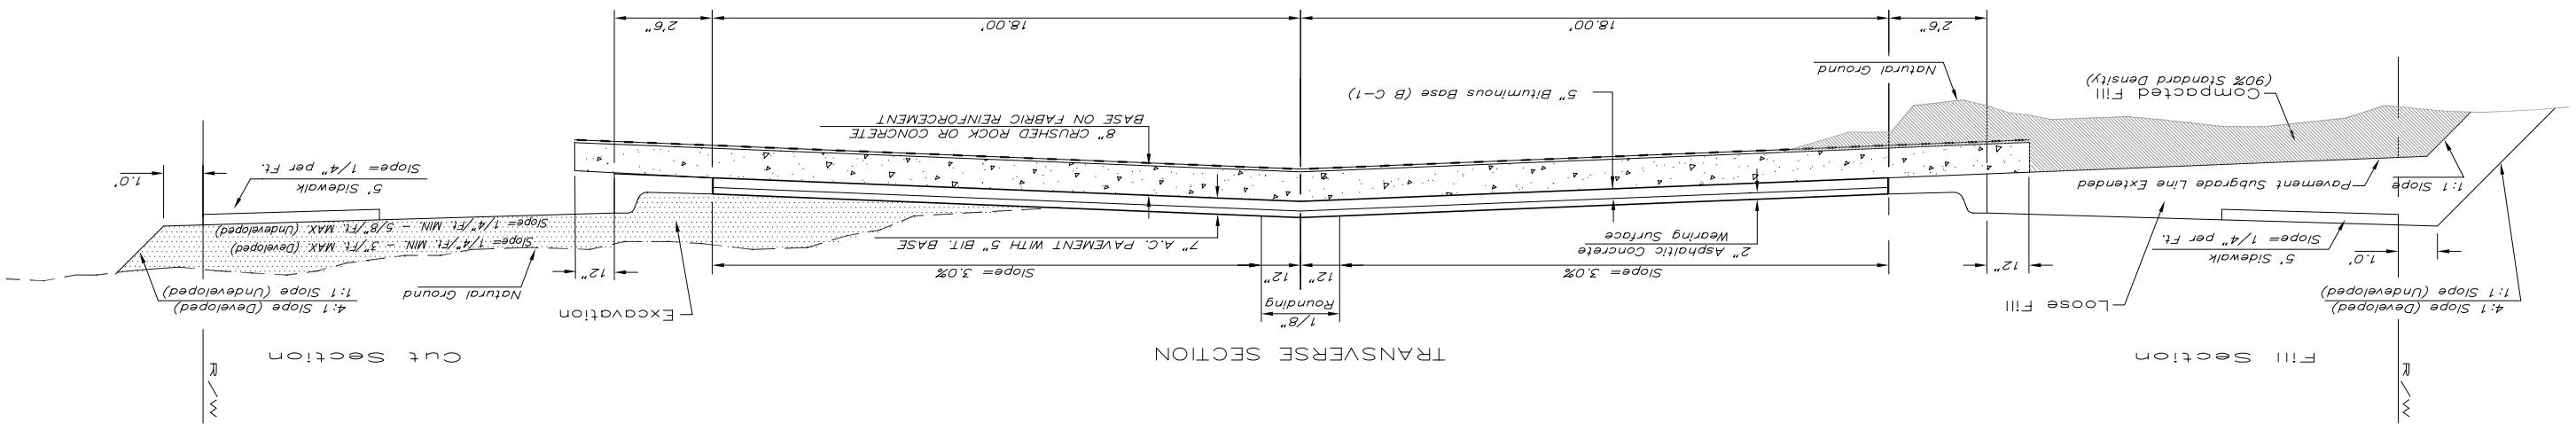


STATE CURB
MODIFIED TYPE I
COMBINED CURB & GUTTER



COMBINED CURB & GUTTER




COMBINED ROLL TYPE CURB & GUTTER

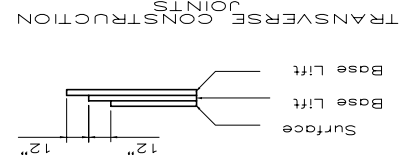


TRANSVERSE CONSTRUCTION

Surface
Base Lift
Base Lift


Transverse construction joints shall be constructed in existing flexible base pavements as shown by the detail. All costs associated with the construction of the transverse joint shall be included in the bid price for Square Yards 7\"/>



MEDIAN CURB

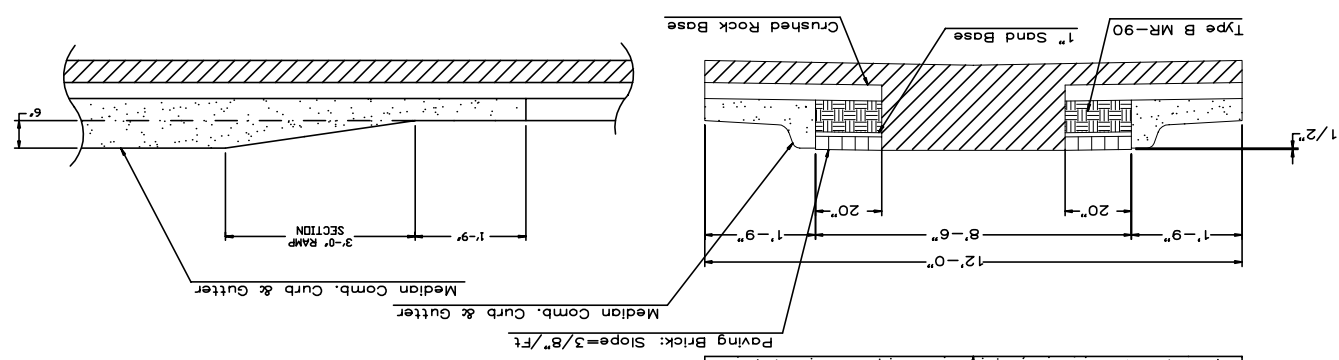

Median Comb. Curb & Gutter
Paving Brick: Slope=3/8\"/>

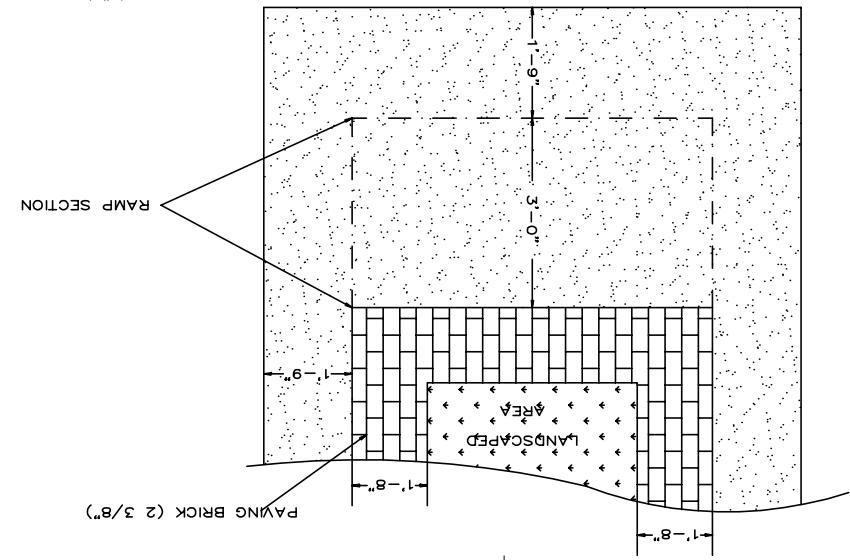

RAMP SECTION

THE CITY OF WICHITA
CITY ENGINEER'S OFFICE
1000 SOUTH MAIN STREET
WICHITA, KANSAS 67202
(316) 266-4114 FAX
(316) 266-4901

Revised: 1-24-00, MOC

41' PAVEMENT 6\"/>		PROJECT NUMBER 472-83890	DATE JUN 01
W/ CRUSHED ROCK BASE		OCN NUMBER 706875	SHEET 3 OF 36
NEIL D. CABLE, P.E. - CITY ENGINEER			

General Notes

FABRIC BASE REINFORCEMENT SHALL BE B X 1100 GEORGD AS MANUFACTURED BY TENSAR CORPORATION OR APPROVED EQUAL. FABRIC BASE REINFORCEMENT SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS. CRUSHED ROCK SHALL BE UNIFORMLY GRADED FROM 1-1/2\"/>

ROCK BASE IS TO BE COMPACTED AND SMOOTHED WITH A STEEL FACED ROLLER PRIOR TO PLACEMENT OF ASPHALT. TACK COAT WILL NOT BE APPLIED TO ROCK BASE.

A TACK COAT OF EMULSIFIED ASPHALT (SC-1H OR CSS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE OF 0.05 GALLONS PER SQUARE YARD BETWEEN EACH LIFT OF ASPHALTIC MATERIAL.

BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC CONTROLS FOR LINE AND GRADE.

CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF ONE (1) FOOT FROM JOINTS IN PRECEDING LIFTS AND PLACED SO THAT A JOINT WILL BE CONSTRUCTED ON THE CENTERLINE OF THE TOP LIFT.

THE ASPHALTIC CONCRETE PAVEMENT BETWEEN THE COMBINED CURB AND GUTTER SHALL BE PAID AS SQUARE YARDS OF 7\"/>