


STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
KANSAS	472-84295	2010	5	194

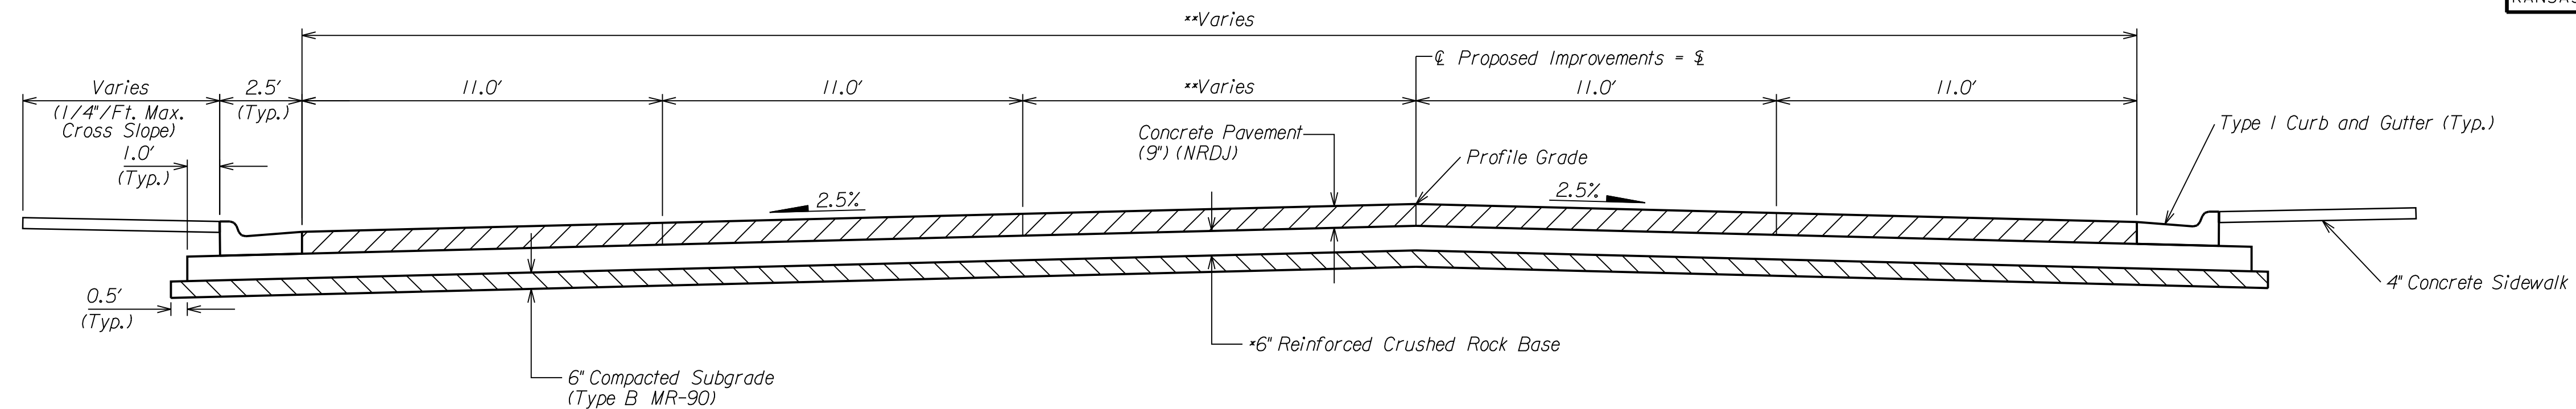


TYPICAL SECTION 21st STREET
 **Sta. 47+00.83 to Sta. 47+86.91 Varies 0'-12'
 Sta. 52+39.03 to Sta. 54+47.00 Varies 12'-0'

NOTE:
 Contractor Shall See Streetscape Plans for all Items of Construction Beyond the Back of Curb and Brick Treatment for Median. See Shts. 22-40


*Reinforced Crushed Rock Base shall be reinforced with Tensar BX1100 Geogrid, or Approved Equal. Geogrid is SUBSIDIARY to Reinforced Crushed Rock Base Bid Item.

Sta. 50+80.07 to Sta. 51+54.62 Railroad Approaches to be Constructed. See Shts. Rem & Rep 8 Conc Pavement


Sta. 50+80.07 to Sta. 51+54.62 Cross Slope Varies, Lt. & Rt. See Cross Sections

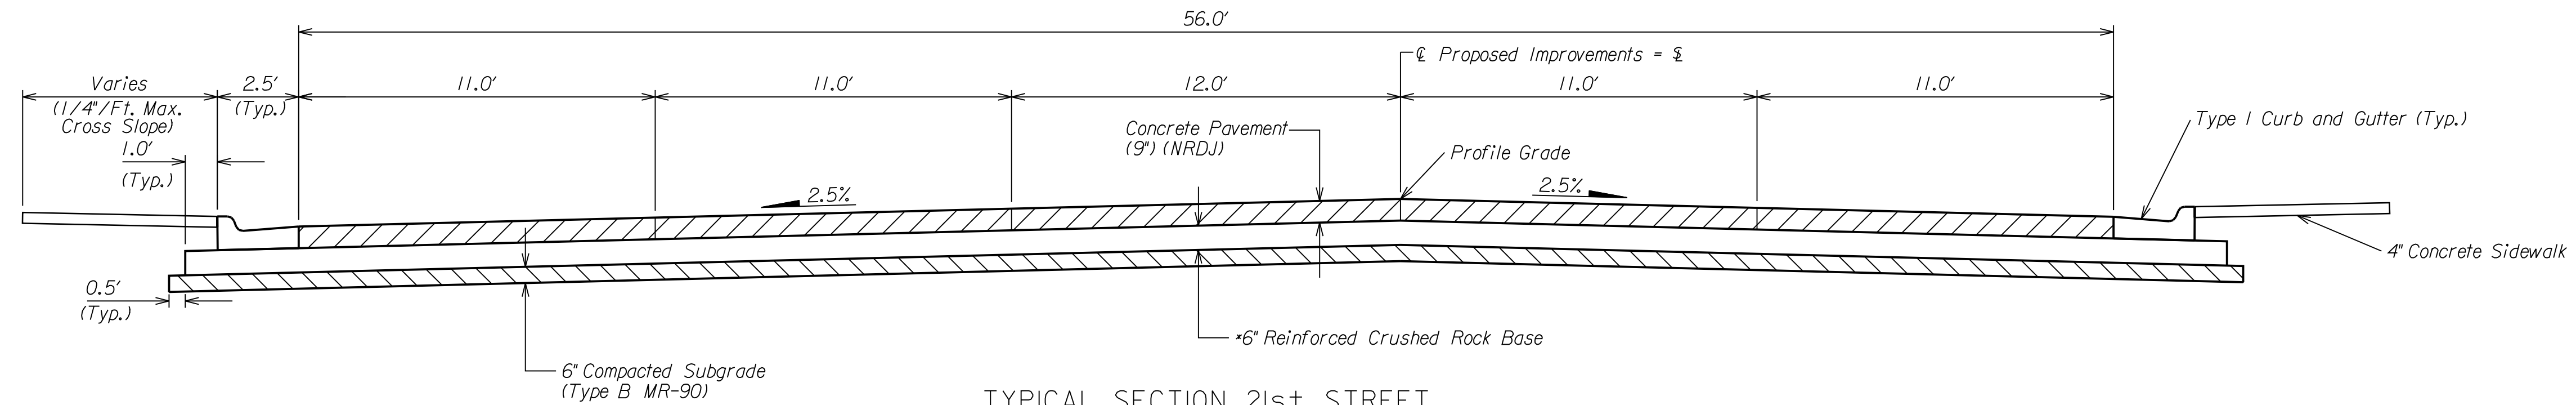

TYPICAL SECTION 21st STREET
 Sta. 47+86.91 to Sta. 49+23.35

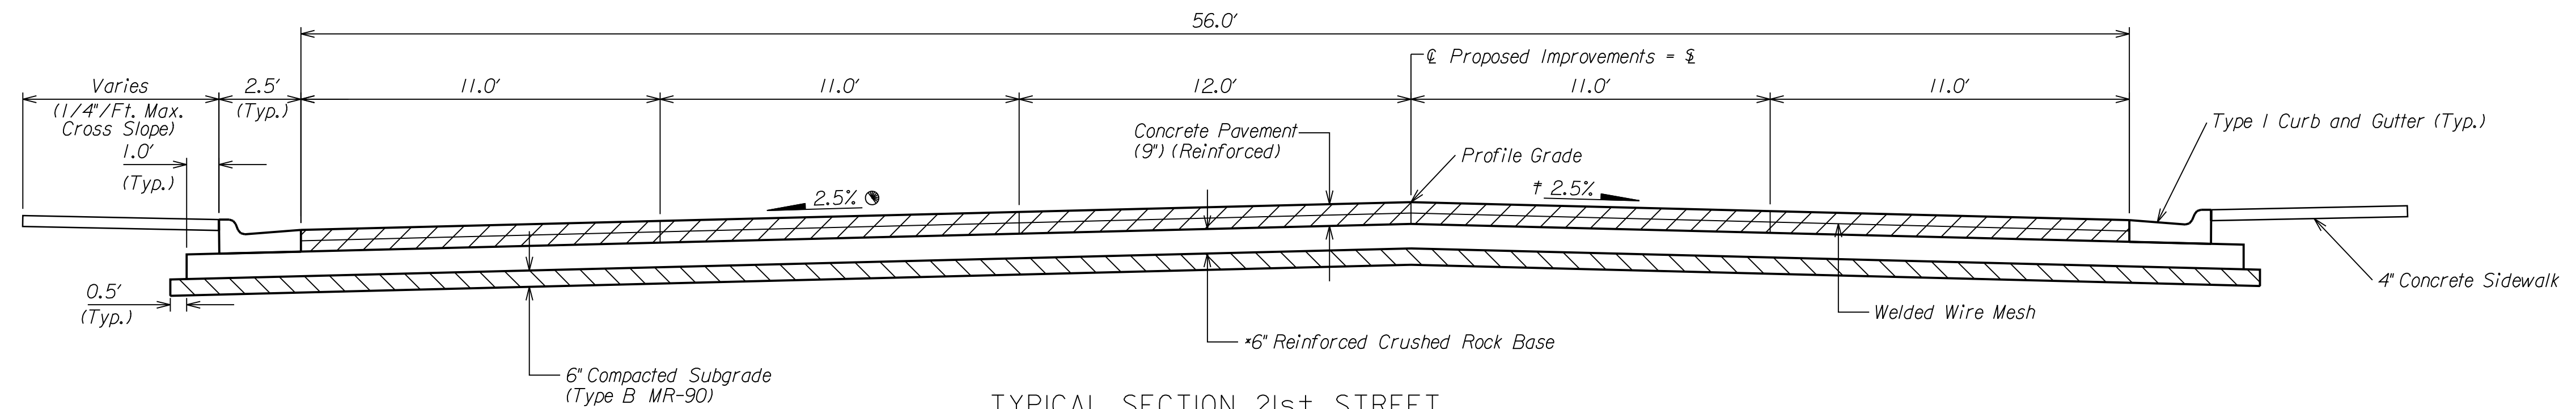

TYPICAL SECTION 21st STREET
 Sta. 49+23.35 to Sta. 50+80.07
 ● † Cross Slope Varies Sta. 49+23.35 to Sta. 50+80.07, Lt. & Rt. (See Cross Sections)

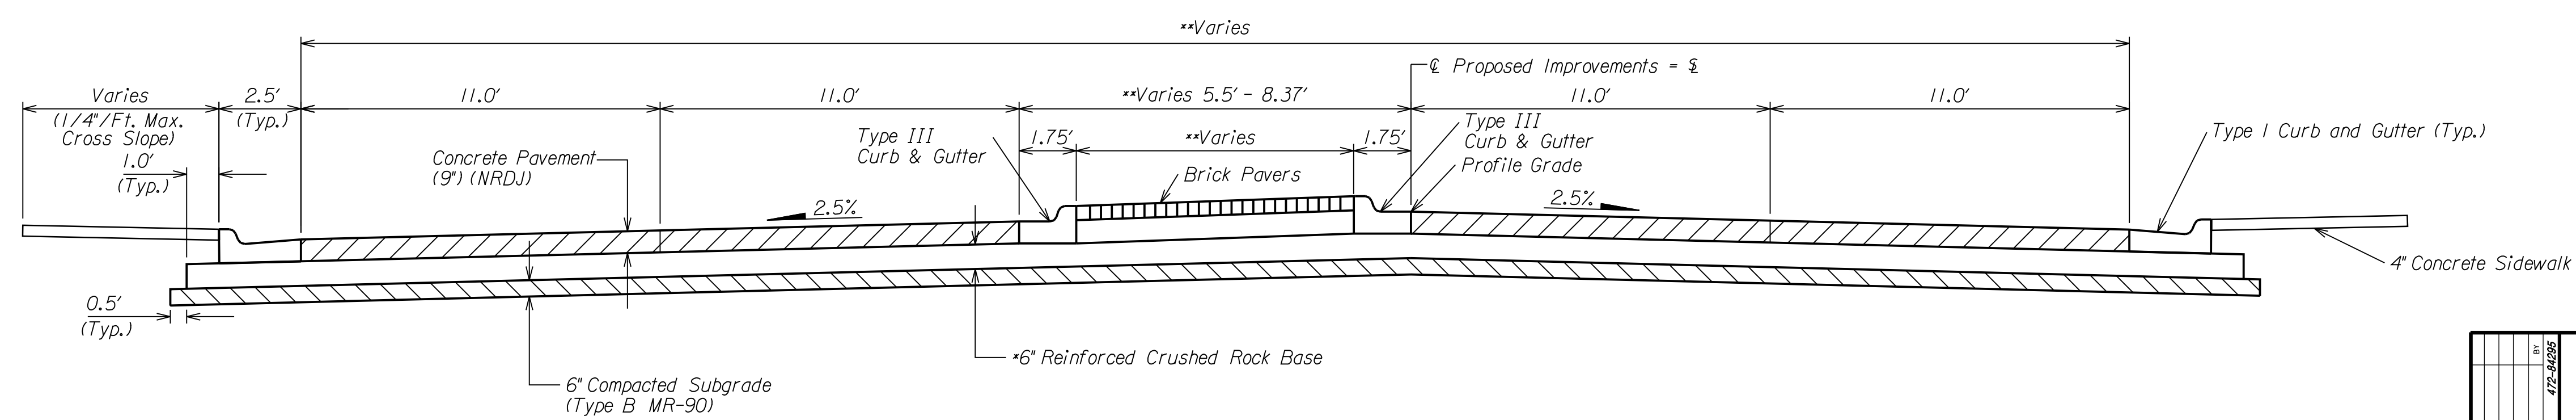

TYPICAL SECTION 21st STREET
 **Sta. 51+48.55 to Sta. 52+39.03 Width Varies

DATE	
BY	
REFERENCES NOTED	
REFERENCES CHECKED	

Plotted By: danavarrro
 Plotted: 1/8/2010
 File: g:\W05\0001\ROAD\001typ01.sht

CITY OF WICHITA 21ST STREET NORTH & BROADWAY AVENUE INTERSECTION TYPICAL SECTIONS 21st STREET WICHITA, KANSAS	
DESIGNED M.D.B.	DRAWN D.A.N.
CHECKED B.A.L.	DATE 1/8/2010

TranSystems