



TYPICAL SECTION A.C. SIDE STREET HOOKUP

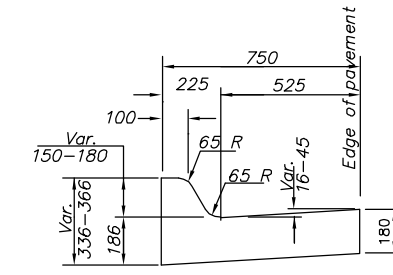


TYPICAL SECTION COMBINED CURB & GUTTER - STD CITY (750 mm WIDTH)

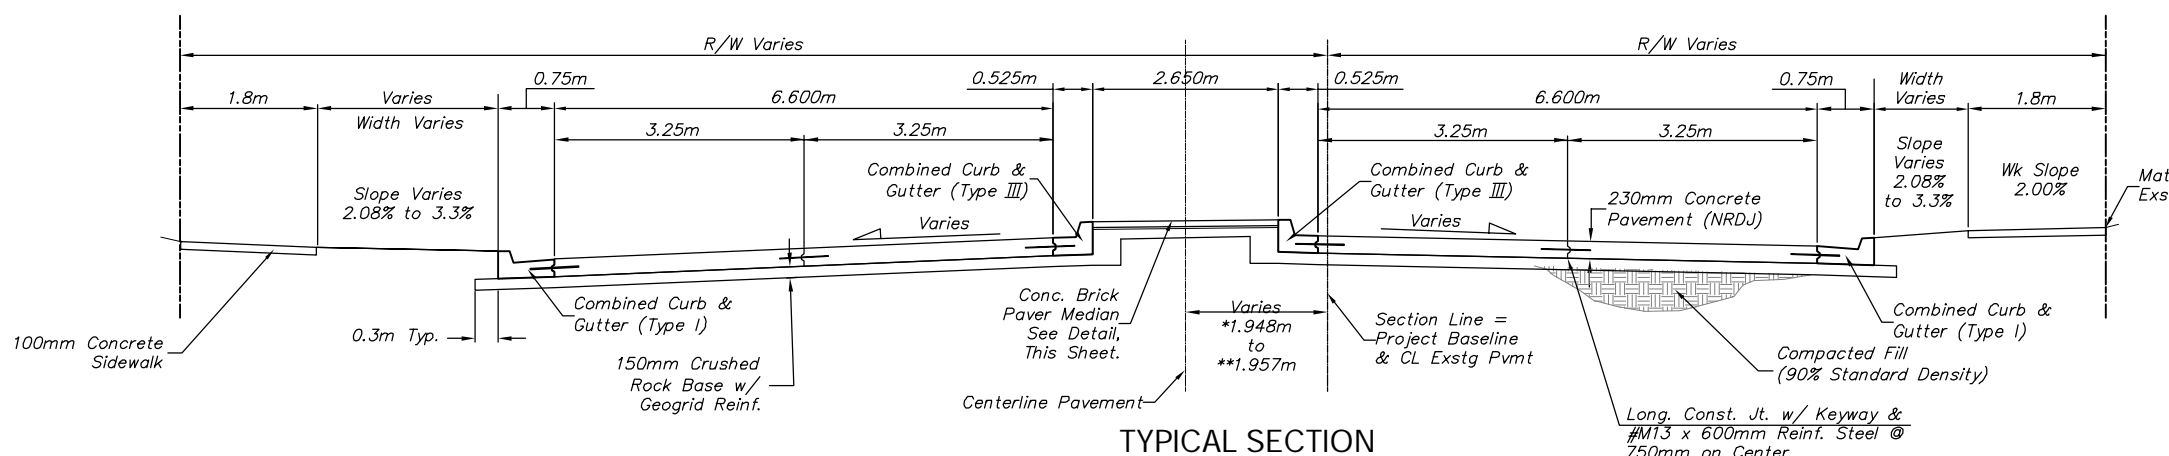


TYPICAL SECTION

*Sta. 0+990.000 to Sta. 0+998.865
 **Sta. 1+225.924 to Sta. 1+233.360

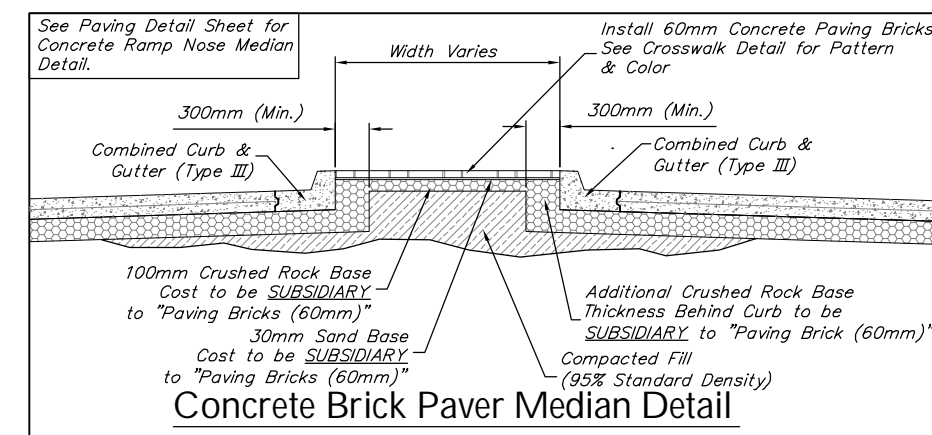

Concrete Brick Paver Median Detail

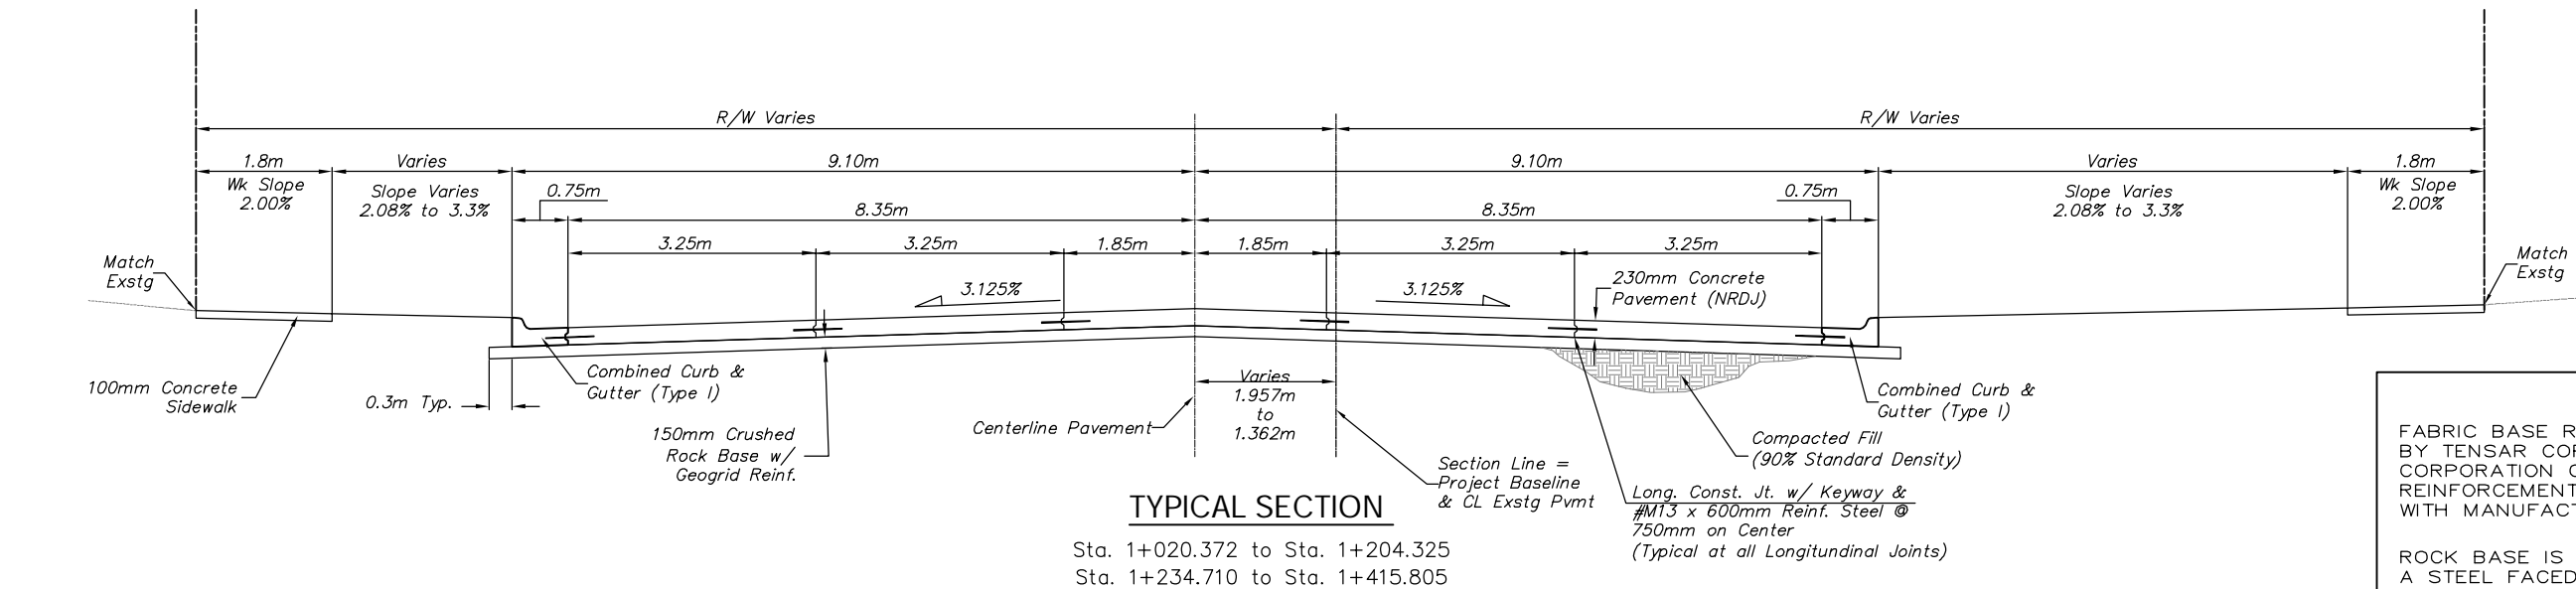

TYPICAL SECTION

Sta. 1+020.372 to Sta. 1+204.325
 Sta. 1+234.710 to Sta. 1+415.805

General Notes

FABRIC BASE REINFORCEMENT SHALL BE B X 1100 BY TENSAR CORPORATION OR LBO201 BY TENAX CORPORATION OR APPROVED EQUAL. FABRIC BASE REINFORCEMENT SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.

ROCK BASE IS TO BE COMPACTED AND SMOOTHED WITH A STEEL FACED ROLLER PRIOR TO PLACEMENT OF ASPHALT. TACK COAT WILL NOT BE APPLIED TO ROCK

THE MAXIMUM JOINT LENGTH ALLOWED WILL BE LIMITED TO 12'.

CRUSHED ROCK GRADATION REQUIREMENTS
 PERCENT OF AGGREGATE RETAINED

2-1/2"	0
3/4"	20 - 60
#4	50 - 80
#40	80 - 94
#200	90 - 98

ROCK QUALITY SHALL CONFORM TO THE REQUIREMENTS SPECIFIED BY THE KDOT 1990 EDITION STANDARD SPECIFICATION SUBSECTION 1102 FOR DURABILITY CLASS I.



PROJECT NUMBER 472-83862	SHEET NAME TypSec02	ENGINEERING DIRECTORY F:\Eng\Hillside
DESIGN JFB	DRAWN Sonny	APPROVED JFB
DATE May 2006	SCALE None	BAUGHMAN NO 01-03-E947

CAPITAL IMPROVEMENT PROJECT
TYPICAL PAVEMENT SECTION
 for HILLSIDE AVENUE

BAUGHMAN COMPANY, P.A.
 ENGINEERING, SURVEYING, & PLANNING
 316-262-7271 • 315 ELLIS • WICHITA, KANSAS 67211

SHEET 5 OF 118