


STEEL DETAILS		
TRUSS	Member 1 Wall Thickness	4.78
	Member 2 Wall Thickness	3.05
	N = 10 X = 240 S = 1752 Camber = 22	
END SUPPORTS	Member 1 Wall Thickness	4.78
	Member 2 Wall Thickness	3.18
	Left N = 3 S = 1600 L = 7165	
	Right N = 3 S = 1665 L = 7360	
FOOTINGS	†Left Type G Right Type B	

- †NOTES:
- "Left Type" footing shall be drilled shafts.
 - Install the "Left Type" footing before beginning wall construction in this area.

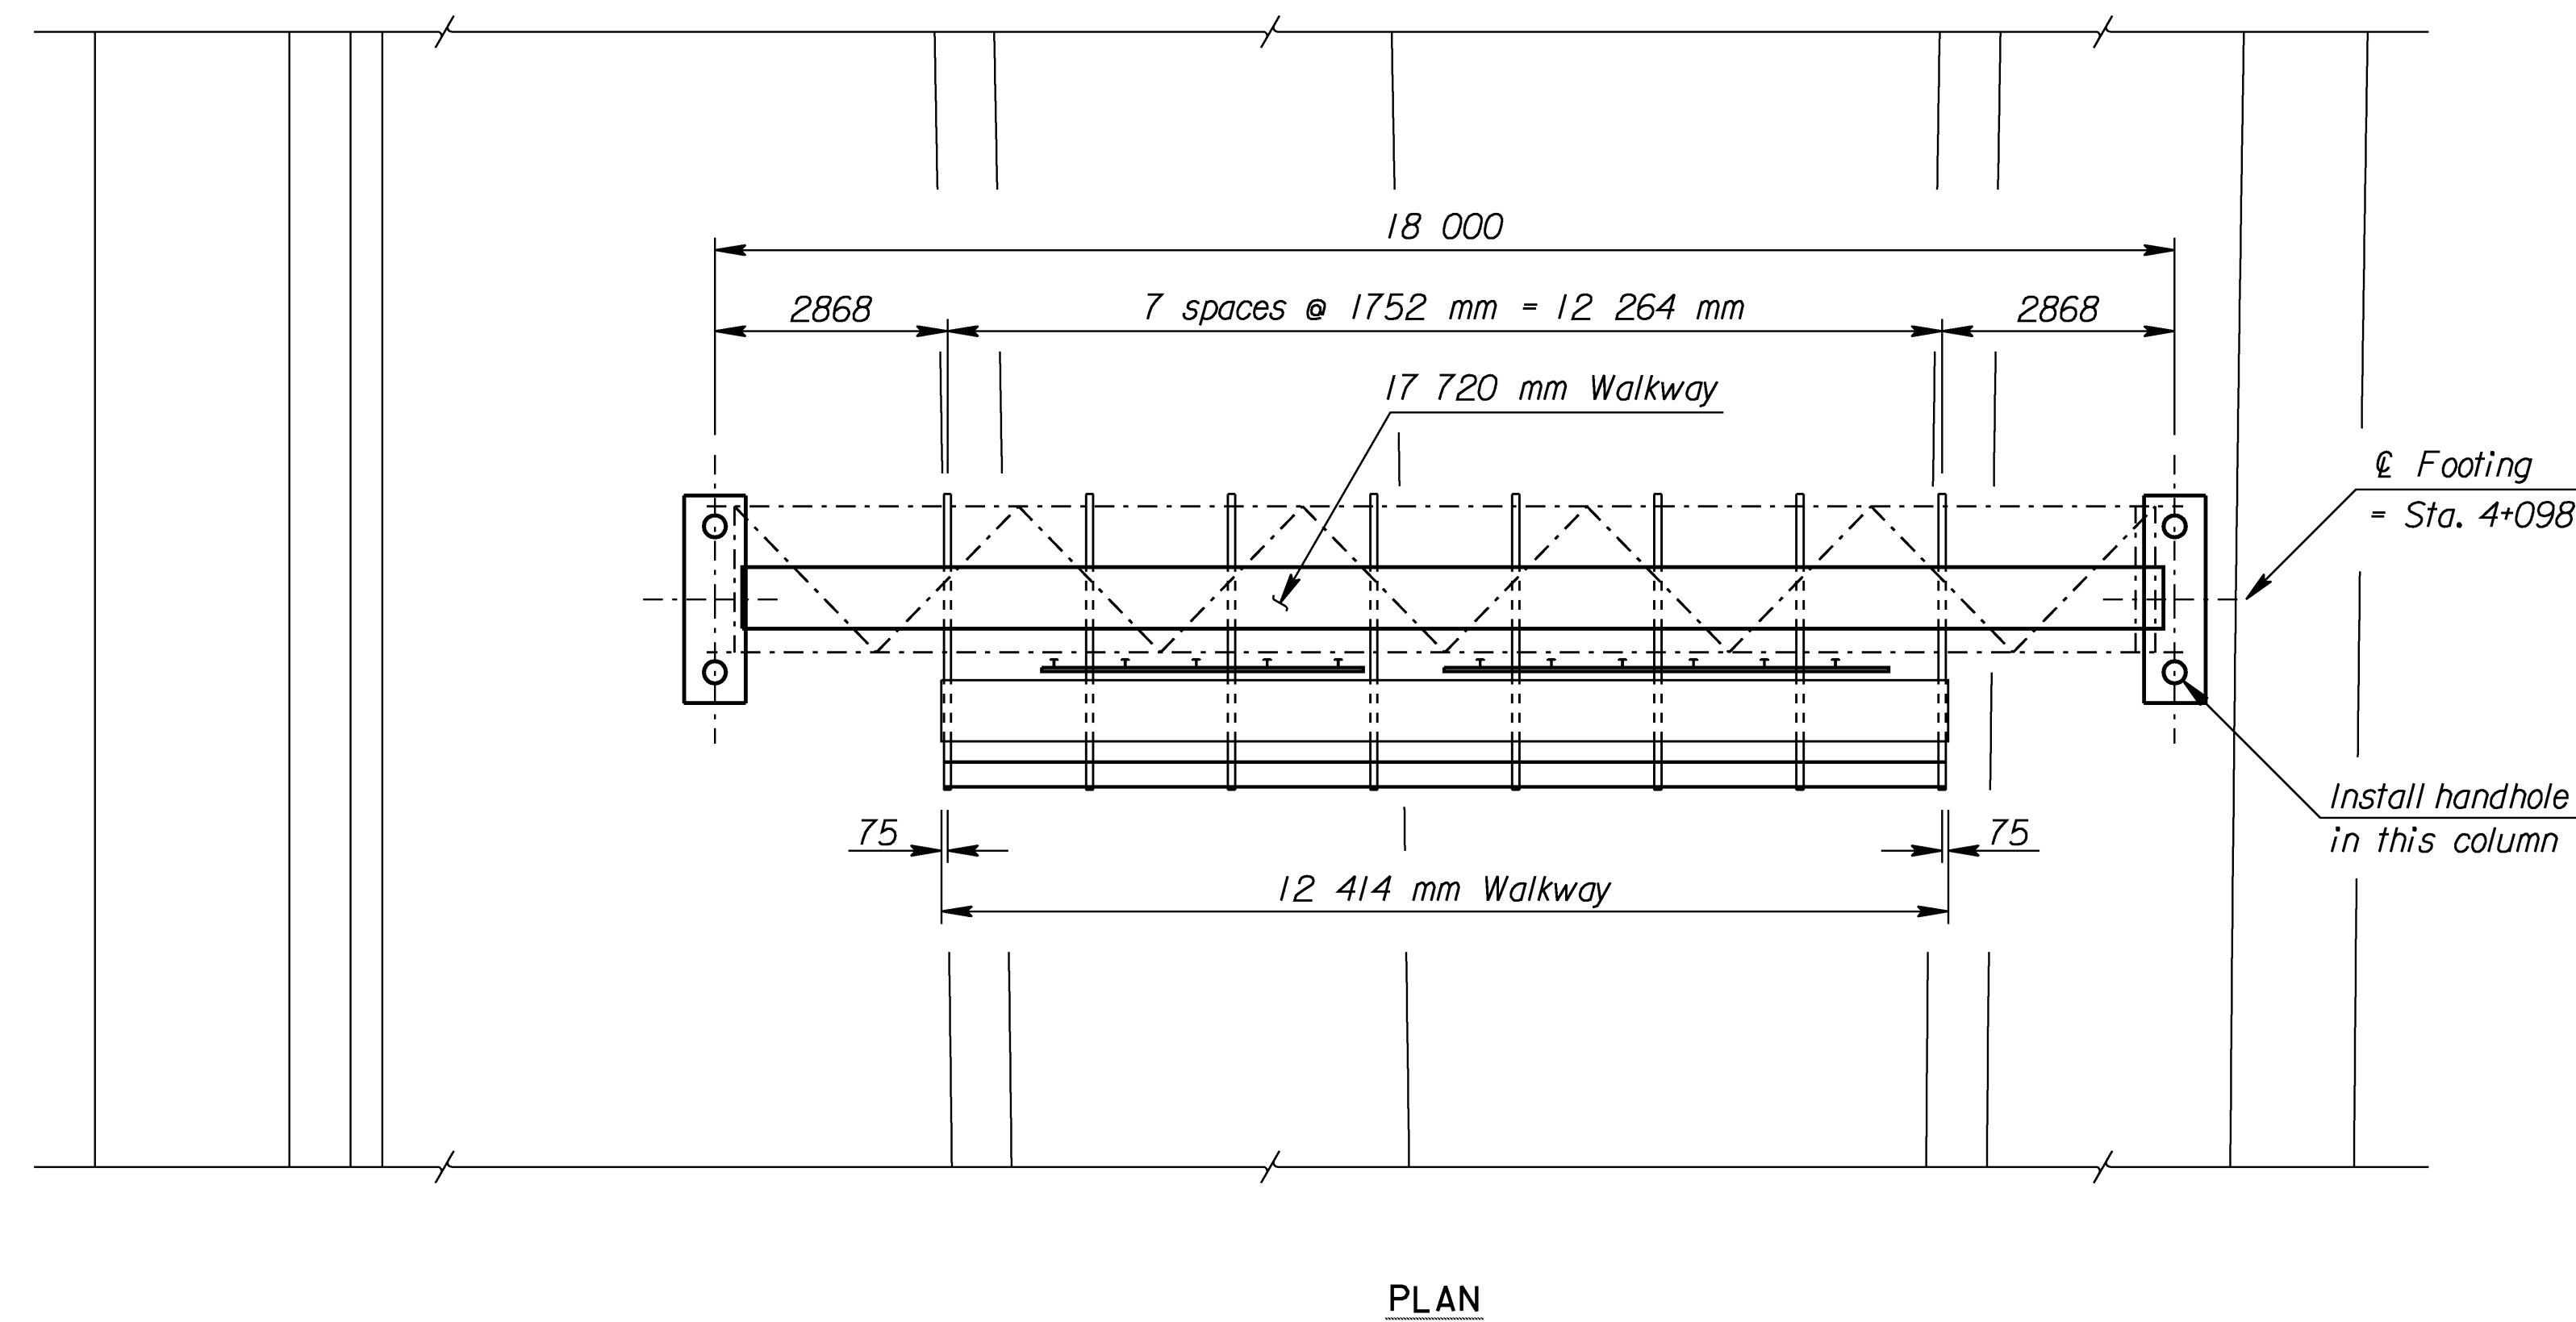

Scale 1:75

Plotted By: bond
 File: F:\Working\82580\NSL_Structures\SL-825808-01-4+098.dgn
 Plot Date: 6/29/2005

3					
2					
1					
NO.	DATE	REVISIONS	BY	APP'D	
KANSAS DEPARTMENT OF TRANSPORTATION S. Front. Rd - E.B. US-54 STATION 4+098 SPAN TYPE OVERHEAD SIGN STRUCTURE CONSTRUCTION LAYOUT STEEL ALTERNATE PROJ. NO. 54-87 K-8258-01 SEDGWICK CO.					
SHEET NO.	OF	SCALE	APP'D		
DESIGNED	SMB	DETAILED	SMB	QUANTITIES	CADD
DESIGN CK.		DETAIL CK.		QUAN. CK.	CADD CK.