

GENERAL NOTES

1. The field survey information shown on the plans represent the existing topographic conditions as best as could be determined. At locations where the new construction is to match existing features, it may require field adjustments of transition lengths and profile grades.
2. It shall be the Contractor's responsibility to coordinate with the utility owner to locate and flag all underground utilities prior to excavation to avoid damaging the utilities. All City owned utilities are to be located by the Contractor. The information shown in these plans concerning type and location of underground utilities is not guaranteed to be accurate or all inclusive. The Contractor is responsible for making his/her own determinations as to the type and location of underground utilities as may be necessary to avoid damage thereto.
3. All borrow to be obtained from areas provided by the Contractor shall be approved by the Engineer, both as to suitability of material and site location. Locations which, in the opinion of the Engineer, contain unsuitable material or will leave unsightly appearance on the project will not be approved.
4. Excavation shown to be wasted shall be wasted on sites provided by the Contractor. These sites shall be approved by the Engineer as to suitability, appearance, and site location. Locations that, in the opinion of the Engineer, will leave an unsightly appearance will not be approved.
5. All work necessary to waste material in a satisfactory manner will be subsidiary to other grading items. All waste material shall have a minimum of 2' soil mantle cover.
6. Connection of existing storm sewer pipe to new structures or existing structures to new pipe shall be considered subsidiary to the storm sewer bid items.

7. The bid item "Clearing and Grubbing" shall include removal of all grass and other vegetation within the limits of construction and the right of way limits. Exceptional trees which do not interfere with the construction will be saved as directed by the Engineer. No burning will be allowed on the project.
8. High ground water may be encountered during storm sewer construction which may require dewatering. Dewatering shall not be paid for directly, but shall be subsidiary to other storm sewer bid items.
9. Temporary shoring and/or bracing of excavation slopes shall be provided as necessary during construction.
10. All pipe scraps, surfacing and construction debris shall become the property of the contractor and shall be removed from the site and disposed of in an approved manner and location.
11. Note: top soil shall be stripped to a depth of 10" to 12" to remove all organic material and as necessary to remove the root system of large trees. This material may be used for final cover outside of pavement area. Following stripping, the grade shall be scarified to a depth of 6" and compacted to 95% of standard max. dry density.
12. The contractor shall adjust private sprinkler systems within the project limits. This work will be paid directly per bid item.

LIST OF UTILITIES


- | | |
|---|---|
| <p><u>Telephone</u>
Southwestern Bell
David Langley
154 North Broadway
Room 210
Wichita, KS 67202
(316) 268-2008</p> <p><u>Power & Street Lights</u>
Westar
Miles Capps
1900 E. Central
P.O. Box 202
Wichita, KS 67214
(316) 261-6824</p> <p><u>Traffic Signals</u>
City of Wichita
Paul Gunzelman
Asst. Traffic Eng.
455 N. Main, 7th Floor
Wichita, KS 67202
(316) 268-4448</p> <p><u>Cable TV</u>
Cox Communication Bryan
Ring 801 E. Douglas
Wichita, KS 67202
(316) 262-4270, Ext. 169</p> | <p><u>Gas</u>
Kansas Gas Service
Charlene Lawless-Pint
1021 East 26th St. North
Wichita, KS 67219
(316) 832-3122</p> <p><u>Sanitary Sewer</u>
City of Wichita
Bill Perkins
455 N. Main, 8th Floor
Wichita, KS
(316) 268-4555</p> <p><u>Water</u>
City of Wichita
Bill Perkins
455 N. Main
Wichita, KS
(316) 268-4555</p> <p><u>Storm Sewers</u>
City of Wichita
Chris Carrier
455 N. Main, 8th Floor
Wichita, KS
(316) 268-4498</p> |
|---|---|

DATE	BY
REFERENCE NOTED	REFERENCE CHECKED

PROJECT SURVEY CONTROL

Horiz. Proj. Datum: Assumed
 Proj. Coord.: Assumed
 Vert. Datum: City of Wichita

Datum Bench Mark:
 COW Bench Mark at Ridge Rd. and 29th St. North
 SW Corner of Intersection
 Elev.=1326.55 MSL = 139.15 City of Wichita

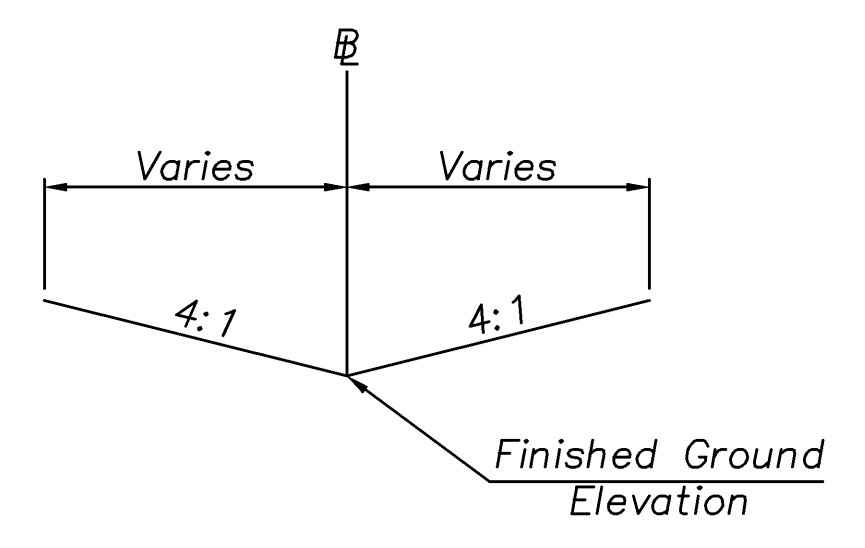

TYPICAL SECTION

RECAPITULATION OF QUANTITIES		
Item	Quant.	Unit
Mobilization	1	L.S.
Clearing & Grubbing	1	L.S.
Common Excavation	190	C.Y.
15" Reinforced Concrete Pipe (RCP)	806	L.F.
Drop Inlet (2'x2')	3	EA.
Erosion Control	1	L.S.
Site Restoration (hydro seeded)	1	L.S.
Private Sprinkler Sys. Restoration	1	L.S.

Drawn by: _____
 File: _____
 SCALE _____
 Plotter: _____