

PROJECT NUMBER	Sheet No.	Total Sheets
472-84703	1	36

STATE OF KANSAS
CITY OF WICHITA
SEDGWICK COUNTY

PROJECT NO. 472-84703
LINCOLN STREET BRIDGE AT ARMOUR DRIVE

2000 TRAFFIC CENSUS 9,323 VEHICLES PER DAY
DESIGN SPEED 35 mph



GRADING
BRIDGE
PAVEMENT
PAVEMENT MARKING
SEEDING


INDEX OF SHEETS

- 1 TITLE SHEET
- 2 TYPICAL SECTIONS
- 3 GENERAL NOTES
- 4 PLAN SHEET
- 5 PROFILE SHEET
- 6 SIDEWALK & STEPS
- 7 CONTOUR MAP
- 8-13 R.F. BOX DETAILS
- 14 RCB AUXILIARY DETAILS
- 15 BRIDGE EXCAVATION
- 16 SUPPORTS & SPACERS FOR REINFORCING STEEL
- 17-20 EROSION CONTROL
- 21 SUMMARY OF QUANTITIES
- 22 CONSTRUCTION SEQUENCE
- 23-33 TRAFFIC CONTROL
- 34 PAVEMENT MARKING
- 35-36 CROSS SECTIONS

(BRIDGE TO BE CONSTRUCTED IN PHASES: 1/2 - 1/2)

NOTE: TRAFFIC SHALL BE PHASED THROUGH CONSTRUCTION. SEE SHEETS 22 THROUGH 32 FOR CONSTRUCTION SEQUENCE AND TRAFFIC CONTROL. CONTRACTOR SHALL BE RESPONSIBLE FOR INSTALLING AND MAINTAINING SIGNS, PAVEMENT MARKINGS, ETC.


Utility Locate Contacts

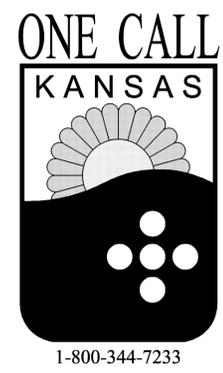

1-800-344-7233

GENERAL NOTE

ALL CONSTRUCTION METHODS AND MATERIALS USED IN THE CONSTRUCTION OF THE IMPROVEMENTS COVERED BY THESE PLANS SHALL BE IN ACCORDANCE WITH THE STANDARD TECHNICAL SPECIFICATIONS AND CURRENT REVISIONS ON FILE IN THE OFFICE OF THE CITY ENGINEER, CITY OF WICHITA, KANSAS. THE CITY ENGINEERS DECISIONS ON QUESTIONS REGARDING THESE PLANS SHALL GOVERN.

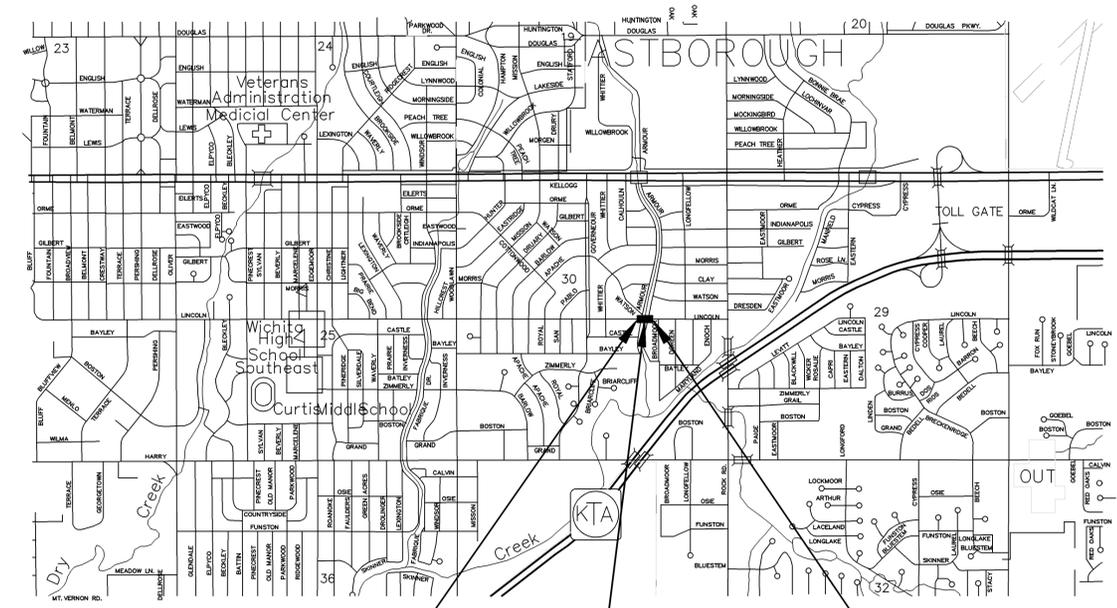


Sta. 20+25.18 BEGIN PROJECT NO. 472-84703

Sta. 20+67 3-12' x 5' x 72'-1 1/8" R.F.B. with Conc. Apron & Soil Saver Lt. 48'-0" Roadway with 8' sidewalks Lt. & Rt. (Skew 10' Rt.)

Sta. 21+09.47; END PROJECT NO. 472-84703

NOTE: ROAD SHALL REMAIN OPEN TO THRU TRAFFIC DURING CONSTRUCTION.

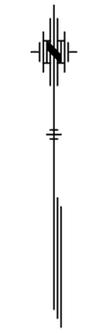

Not to scale

CONVENTIONAL SIGNS

COUNTY LINE	-----	CENTER LINE OF PROJECT	-----
CITY LIMITS	-----	TERRACE	-----
STATE OR NATIONAL LINE	-----	CULVERTS	-----
TOWNSHIP, SECTION or GRANT LINE	-----	DROP INLET & STORM SEWER	-----
PROPERTY LINE	-----	ACCESS CONTROL	-----
HIGHWAY FENCE	-----	POWER POLE	-----
EXISTING FENCE	-----	TELEPHONE POLE	-----
GUARD FENCE	-----	MARSH	-----
CONSTRUCTION LIMITS	-----	HEDGE	-----
RIGHT OF WAY LINE	-----	TREES	-----
TRAVELED WAY	-----	PROFILE ELEVATION	-----
RAILROADS	-----	STREAM or CREEK	-----

PROJ. NO. 472-84703 | O.C.A. # 715717

GROSS LENGTH OF PROJECT	84.29	Ft.
EXCEPTIONS		Ft.
NET LENGTH OF PROJECT	84.29	Ft. 0.016 Mi.
NET LENGTH OF BRIDGES		Ft. Mi.
NET LENGTH OF ROAD	84.29	Ft. 0.016 Mi.

PLANS PREPARED BY:

CFS Cook, Flatt & Strobel ENGINEERS, P.A.

Professional Engineer Seal: 10532, 7/20/10

J:\2008Proj\08566\DWG\title.dwg 7/20/2010 - 9:50am imartin