


STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
KANSAS	54-87 K-8258-01	2007	52	556

DATE	
BY	
REFERENCE NOTED	
REFERENCE CHECKED	

SCALE: 1:200

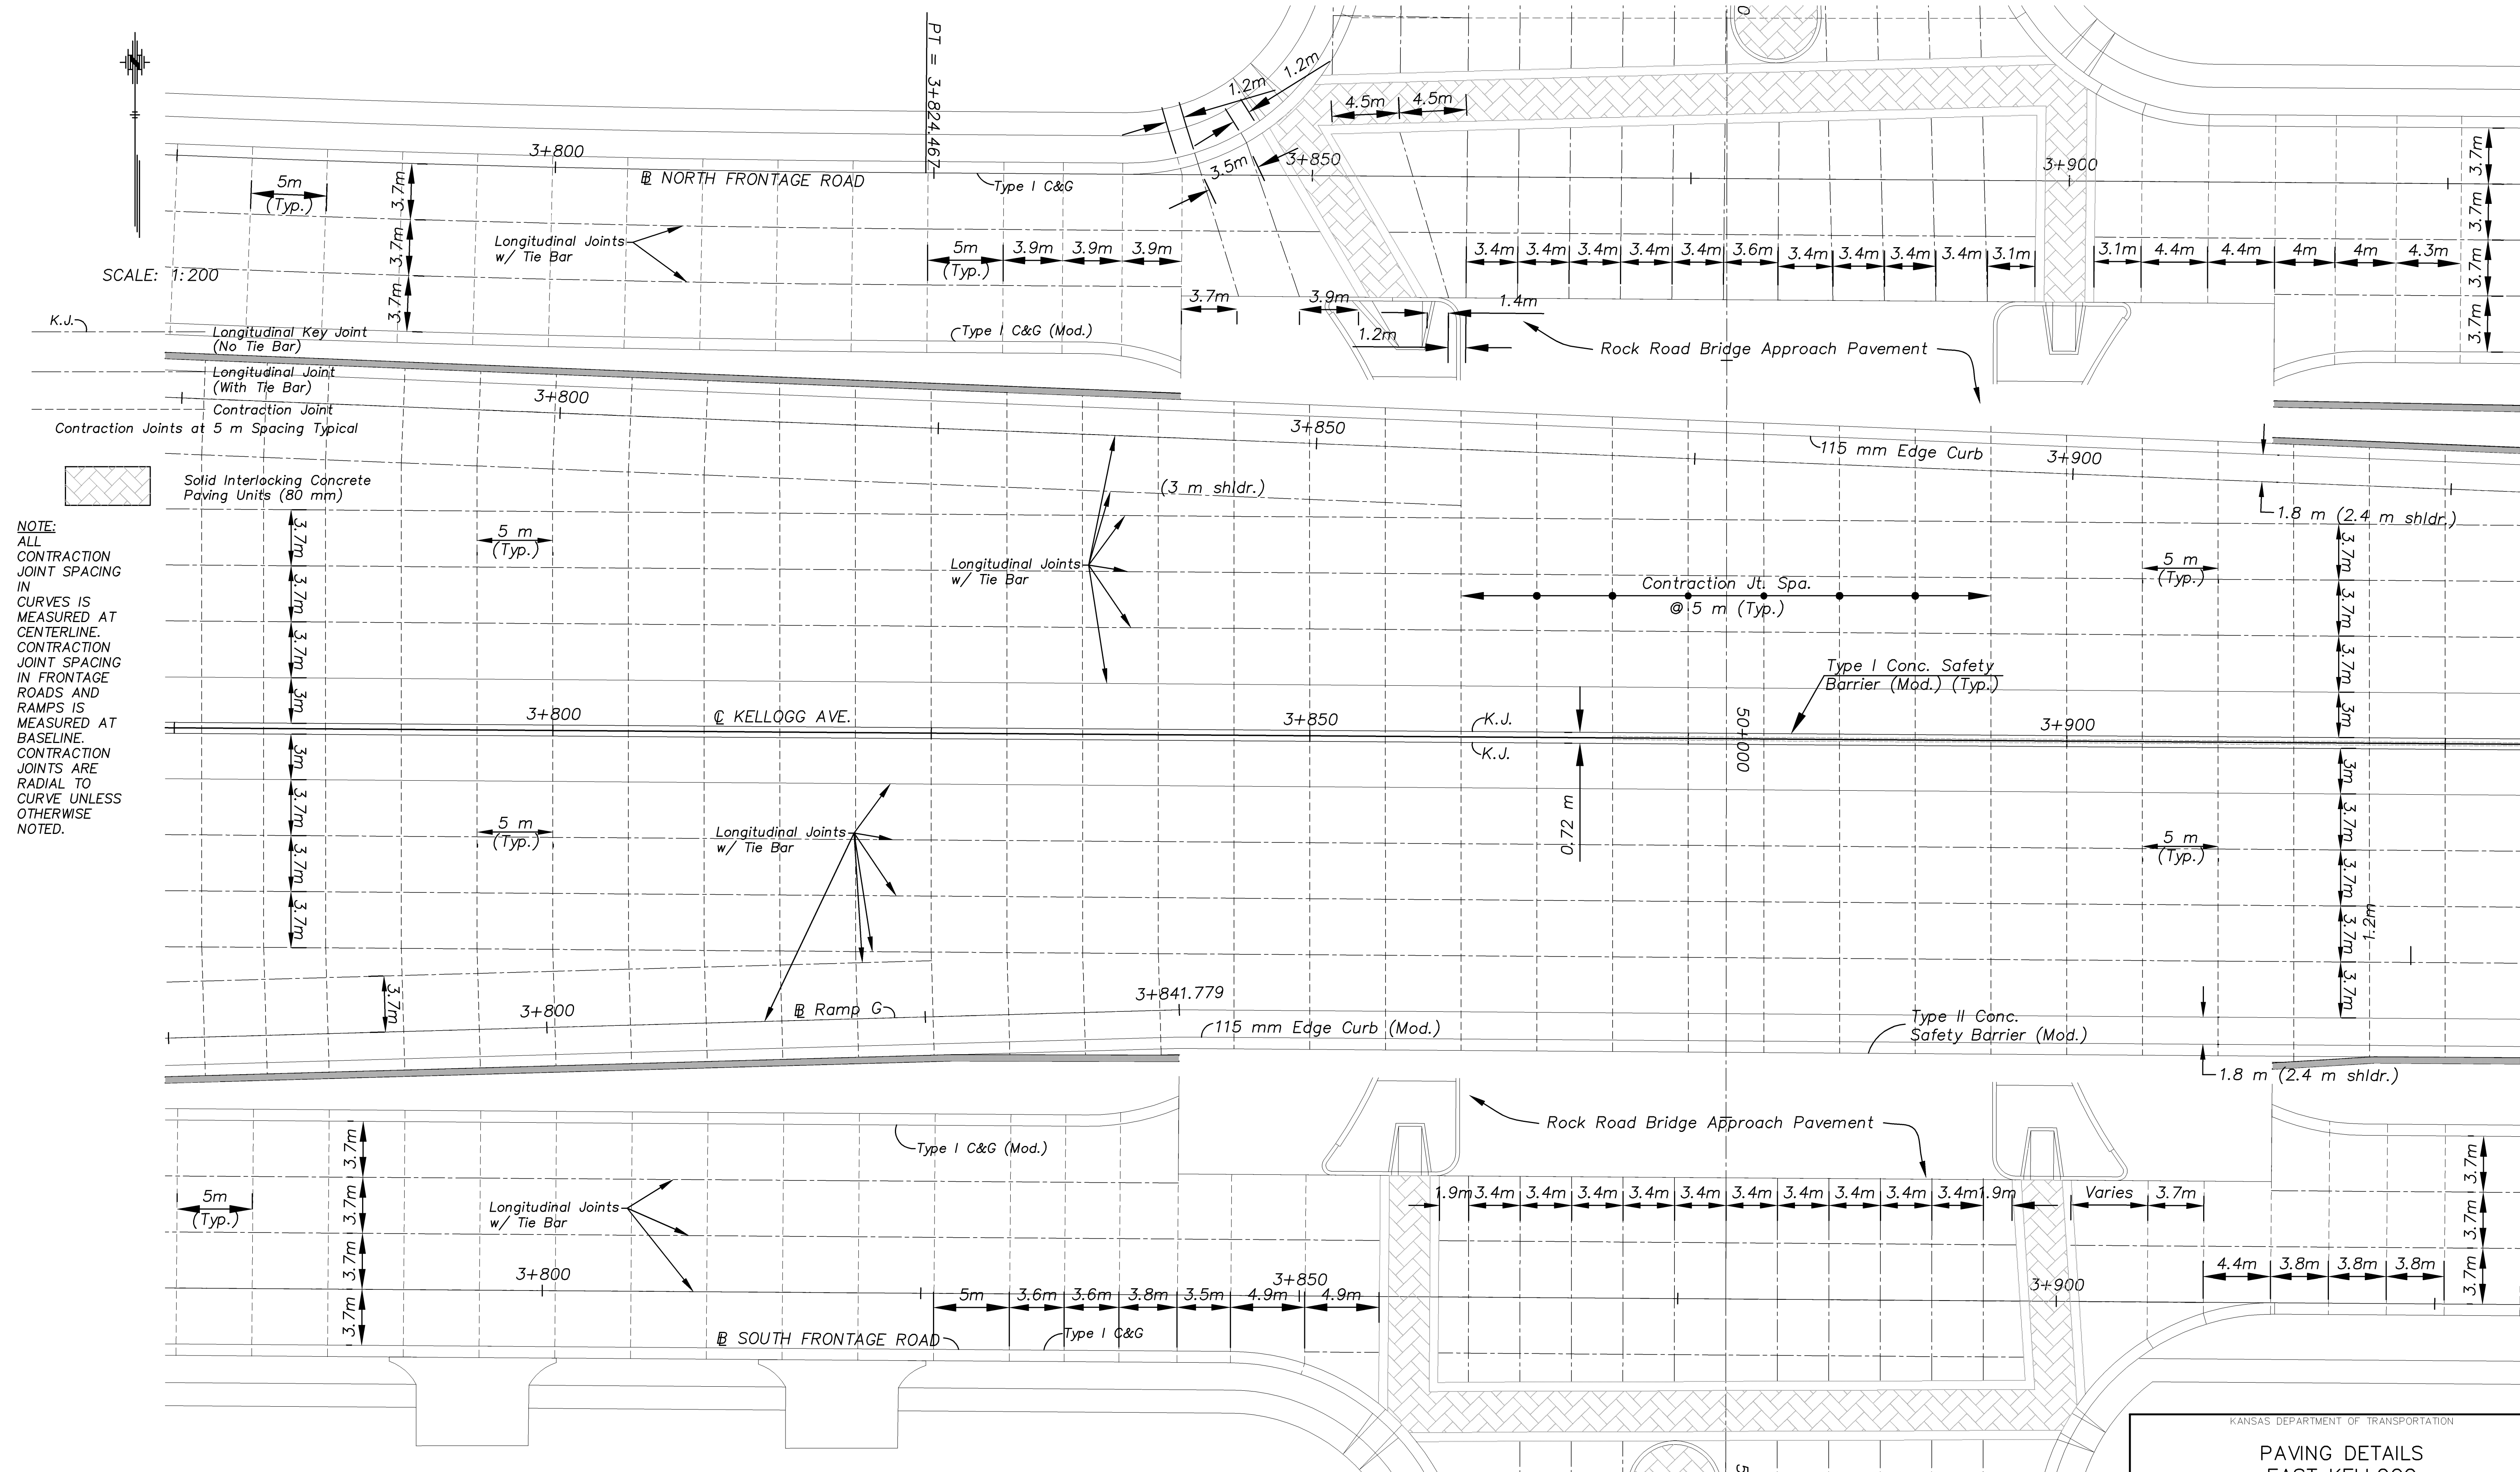

NOTE:
 ALL CONTRACTION JOINT SPACING IN CURVES IS MEASURED AT CENTERLINE. CONTRACTION JOINT SPACING IN FRONTAGE ROADS AND RAMPS IS MEASURED AT BASELINE. CONTRACTION JOINTS ARE RADIAL TO CURVE UNLESS OTHERWISE NOTED.

Solid Interlocking Concrete Paving Units (80 mm)

Longitudinal Key Joint (No Tie Bar)
 Longitudinal Joint (With Tie Bar)
 Contraction Joints at 5 m Spacing Typical

Longitudinal Joints w/ Tie Bar

Contraction Jt. Spa. @ 15 m (Typ.)
 Type I Conc. Safety Barrier (Mod.) (Typ.)

Type II Conc. Safety Barrier (Mod.)

Drawn by: CFS
 File: D109.plt
 SCALE

CFS Cook, Flatt & Strobel
 ENGINEERS, P. A.

KANSAS DEPARTMENT OF TRANSPORTATION
 PAVING DETAILS
 EAST KELLOGG
 STA. 3+775 TO STA. 3+925