



ANGLE OF SIGNS ERECTED ON STRAIGHT ROADWAY

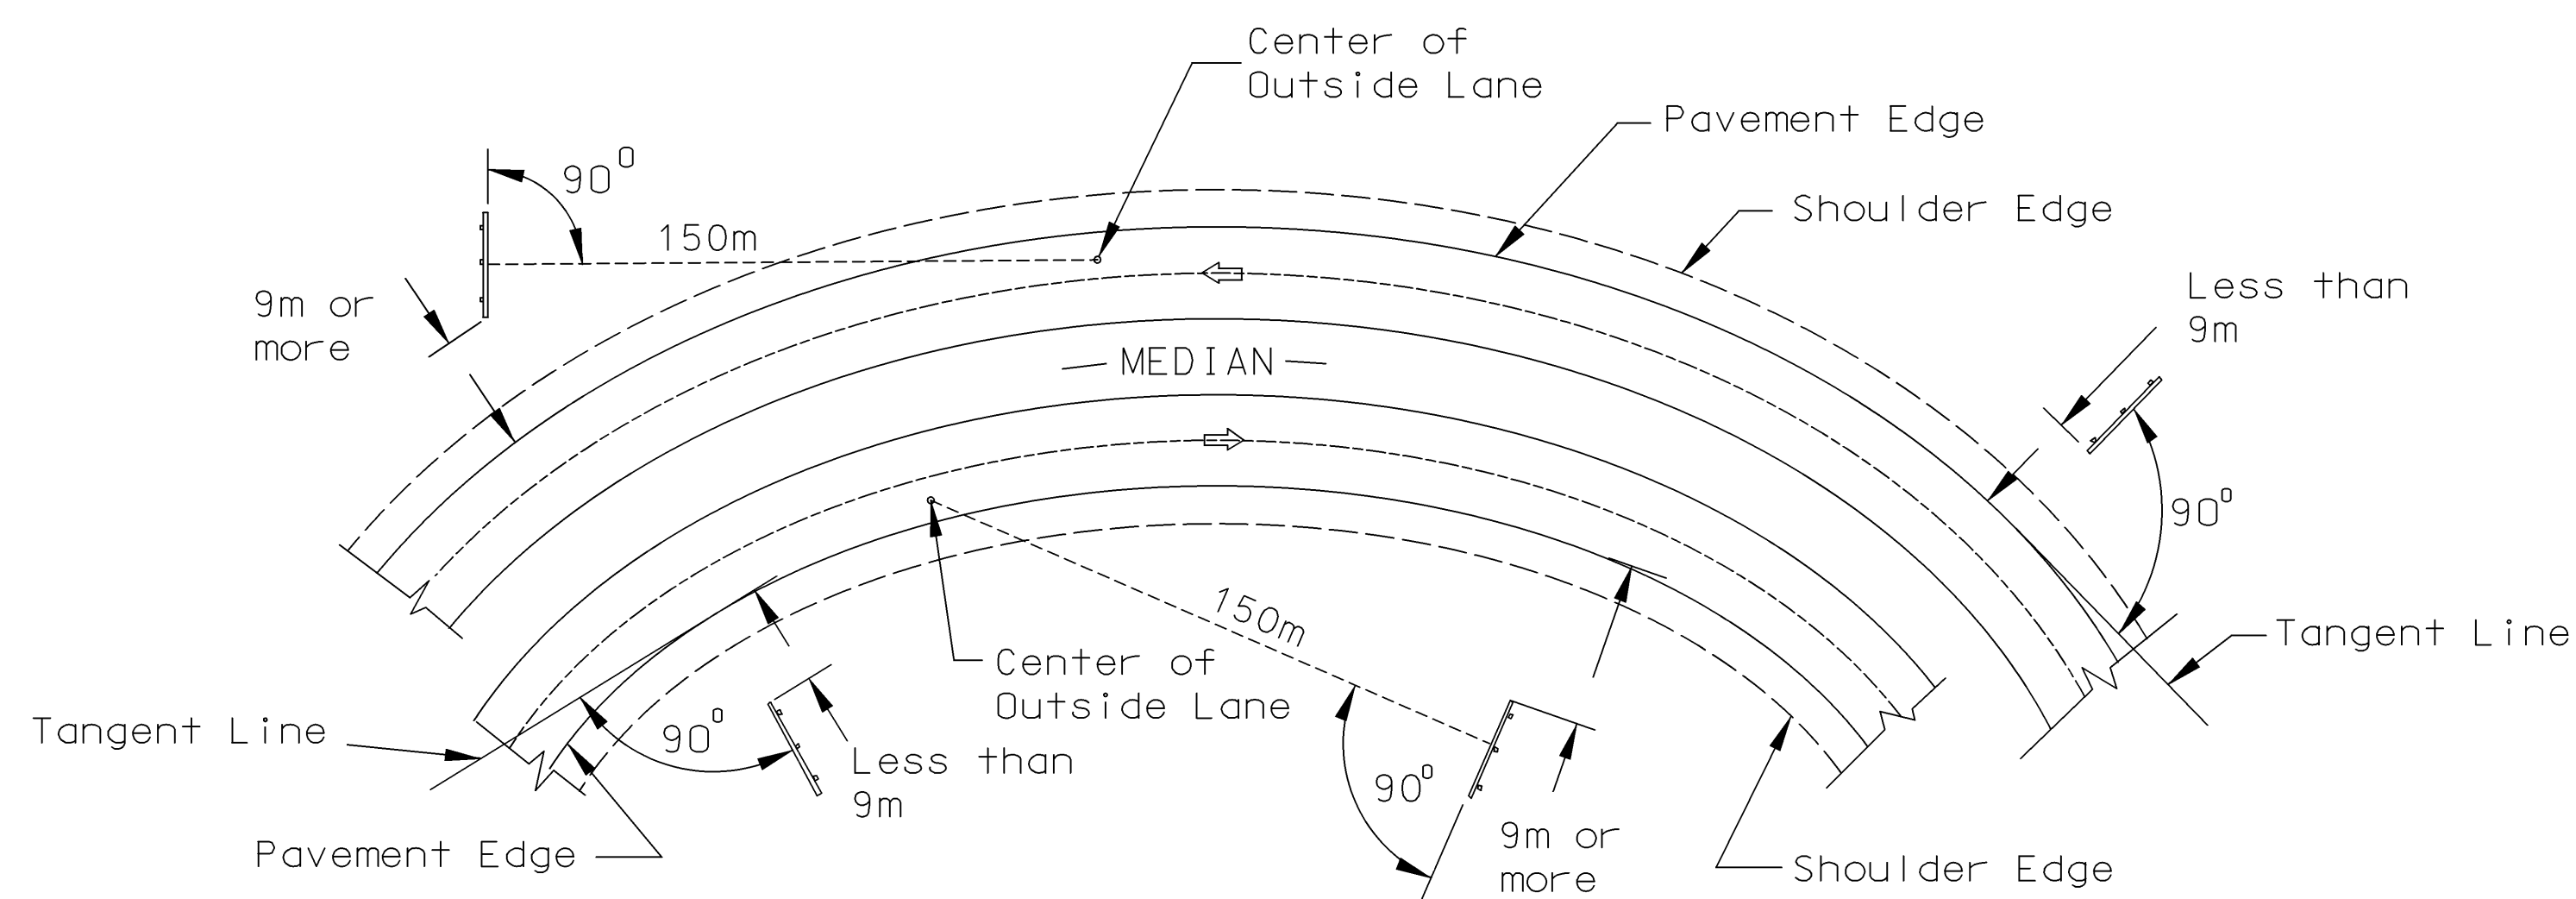

ANGLE OF SIGNS ERECTED ON CURVED ROADWAY

GENERAL NOTE:

Gore and median signs shall normally be erected such that the sign face is truly vertical and rotated 93 degrees away from the center of the lane which the sign serves. All angles are measured to the face of the sign.

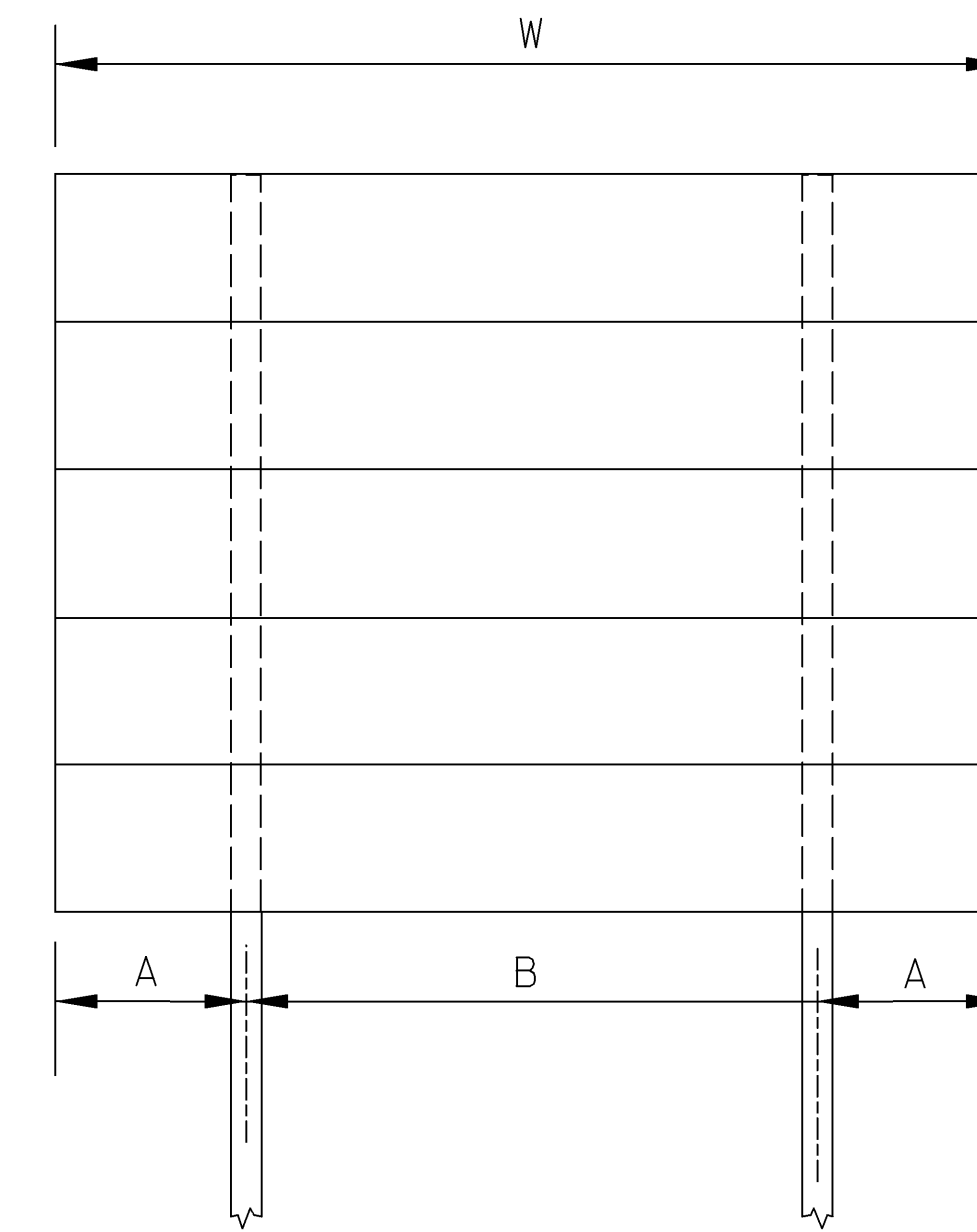

TWO POST SPACING

TYPICAL SPACING PATTERN = A + B + A

2 POST SPACING (minimum dimension)			
	A	B	W
WOOD	150mm*	-	-
STEEL	300mm	2.4m	3.0m

* Structural Panel Signs

W = Width of Sign

A = 1/5W


B = 3/5W

C = 1/8W

D = 3/8W

NOTE: All spacing dimensions are measured to the centerline of the posts. The typical spacing pattern shall not be used if the minimum distance between posts cannot be obtained.

POST SPACING FOR REINFORCED PANEL SIGNS

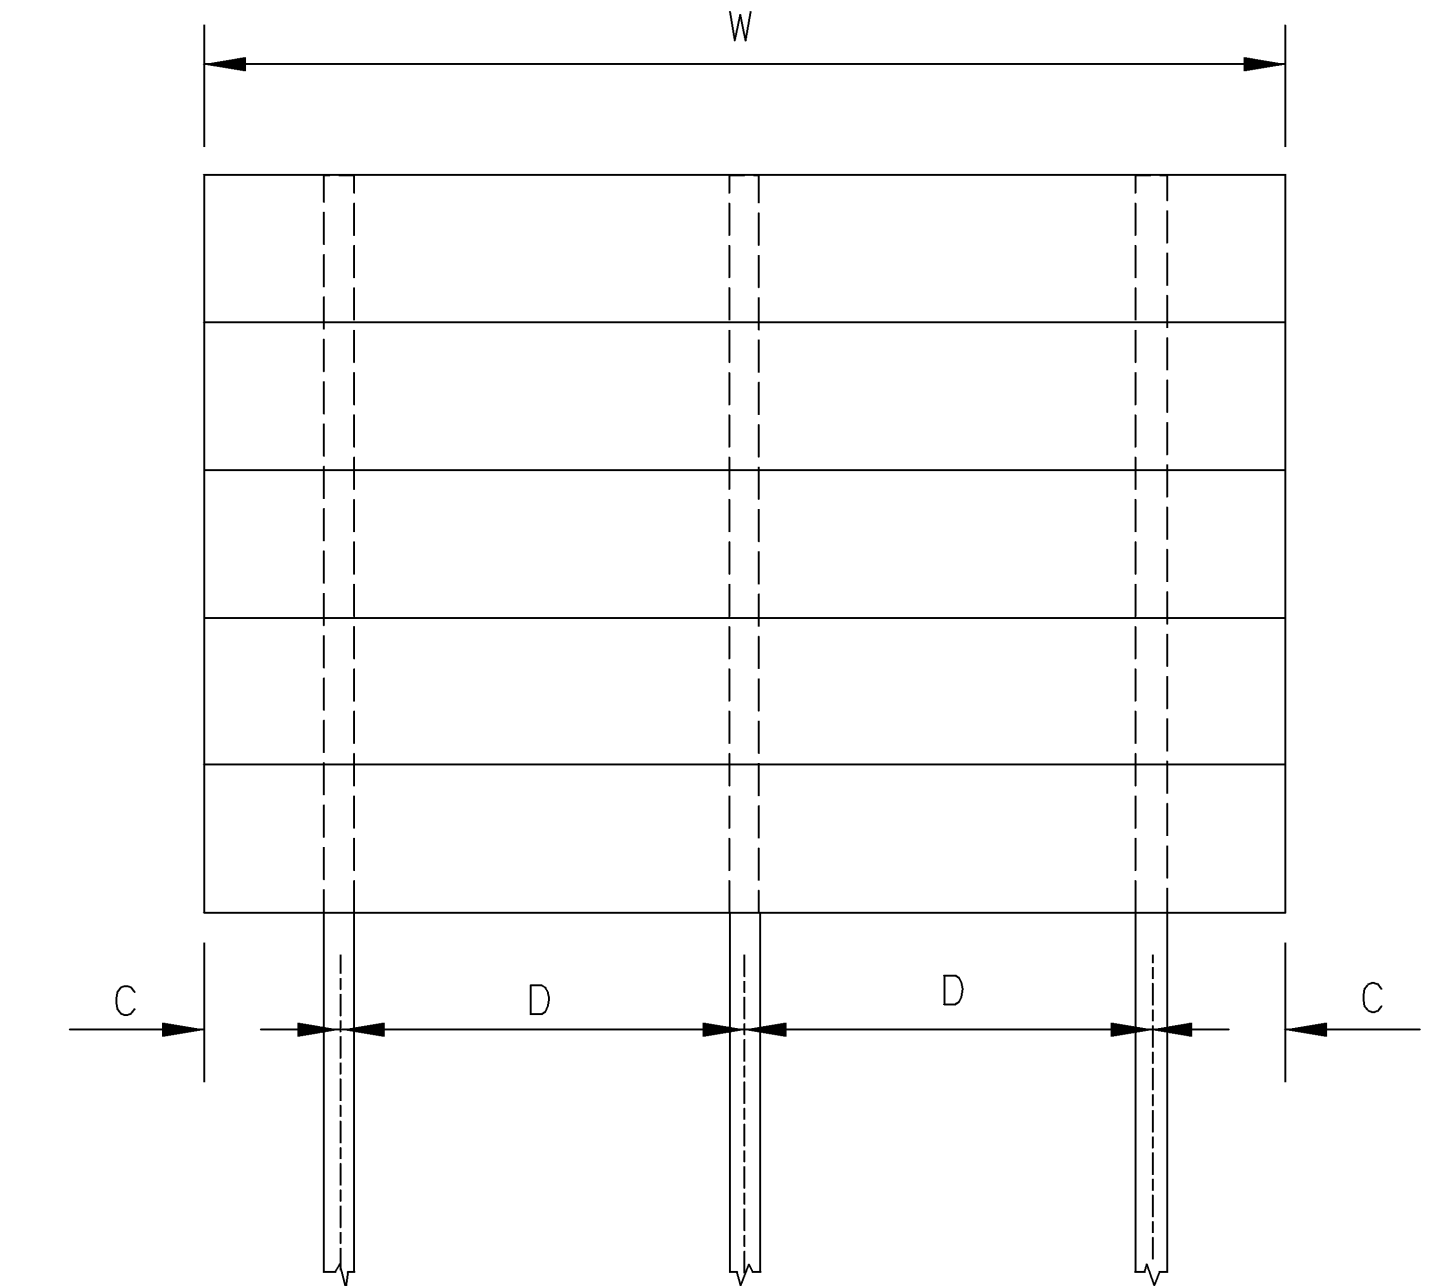

THREE POST SPACING

TYPICAL SPACING PATTERN = C + D + D + C

3 POST SPACING (minimum dimension)			
	C	D	W
WOOD	150mm	1.20m	2.7m
STEEL	300mm	2.4m	5.4m

Plotted By : @USERNAME@
 Plot File : @FILENAME@
 Plot Date : @SYTIME@

3				
2				
1				
NO.	DATE	REVISIONS	BY	APP'D
KANSAS DEPARTMENT OF TRANSPORTATION POST SPACING FOR REINFORCED PANEL SIGNS AND ANGLE OF SIGN TE404si 07-01-03				
FHWA APPROVAL	07-22-2003	APP'D	Steven A. Buckley	
DESIGNED	DDG	DETAILED	WSB	QUANTITIES
DESIGN CK.	SAB	DETAIL CK.	DDG	QUAN. CK.
				TRACED
				TRACE CK.