


TYPICAL SECTION
Sta. 207+83 to Sta. 229+00

- ① Profile Grade is the theoretical top of pavement elevation at E.
- ② 6'-0" at Sta. 207+83 to Sta. 228+10. Varies from 6'-0" at Sta. 228+10 to 7'-3 3/8" at Sta. 229+00.
- ③ 6'-0" at Sta. 207+83 to Sta. 228+10. Varies from 6'-0" at Sta. 228+10 to 6'-10 3/4" at Sta. 229+00.
- ④ Varies from 1.80% at Sta. 207+83 to 3.00% at Sta. 208+33. 3.00% from Sta. 208+33 to Sta. 228+50. Varies from 3.00% at Sta. 228+50 to 2.50% at Sta. 229+00.
- ⑤ Varies from 2.70% at Sta. 207+83 to 3.00% at Sta. 208+33. 3.00% from Sta. 208+33 to Sta. 228+50. Varies from 3.00% at Sta. 228+50 to 2.40% at Sta. 229+00.
- ⑥ Location of Sidewalk Varies. See Plans.
- ⑦ Backfill behind curbs. Quantities for this work are included in the Earthwork Summary Table.

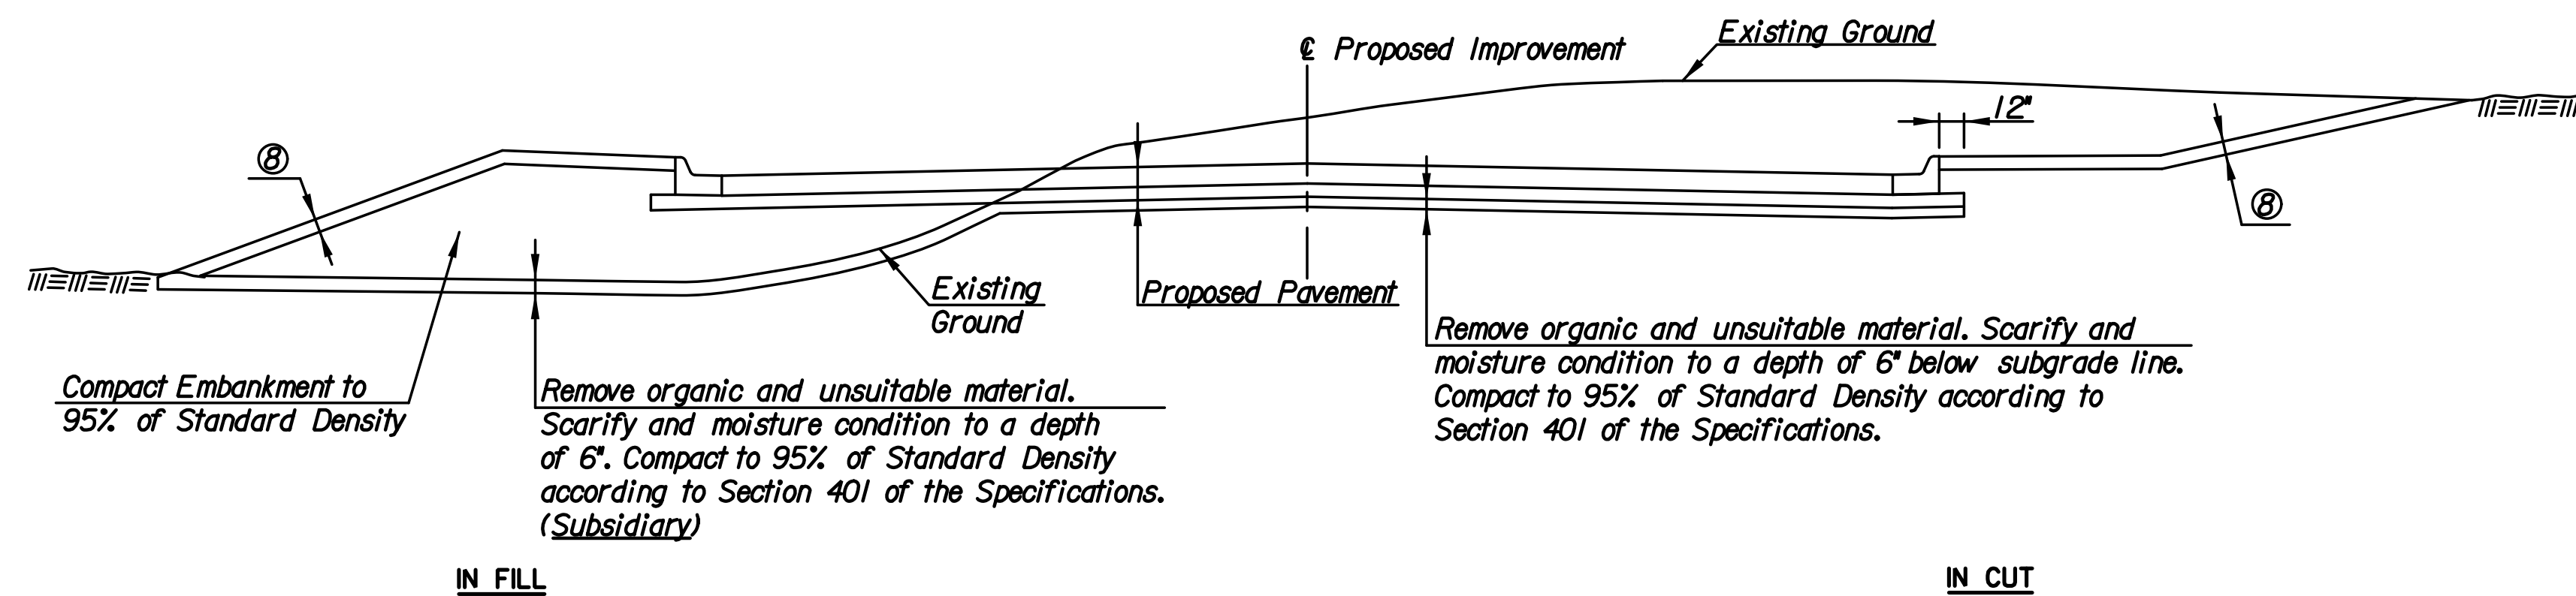


COMPACTION DIAGRAM

Note: All embankment, including sideroads and driveways shall be compacted.

⑧ The top 6" of all areas to be seeded shall be topsoiled with material suitable for growth of vegetation. Thru cuts, over excavate 6" for placement of topsoil. This work shall be *Subsidiary* to other earthwork items. In fill, the top 6" of embankment shall be topsoil. Quantities for this work are included in the contract bid items for earthwork. No measurement or payment will be made for material required to replace material excavated during stripping operations.

Plotted By: svb Date: 2/25/2013 9:32:52 AM
FILE: I:\2010\0281\Typical\0281-Typsecl.dgn

No.	Revision	By	Date
135TH ST.			
TYPICAL SECTION			
GARY JANZEN, P.E.-CITY ENGINEER CITY OF WICHITA PROJECT NO. 472-84915			
 PEC PROFESSIONAL ENGINEERING CONSULTANTS, P.A. 303 SOUTH TOPEKA WICHITA, KS 67202 316-262-2691 www.pec1.com			
Designed by	RJS	Job No.	10281
Drawn by	JDT	Date	JAN., 2013
			Sht. 2 of 83