




COMBINED CURB & GUTTER (6")

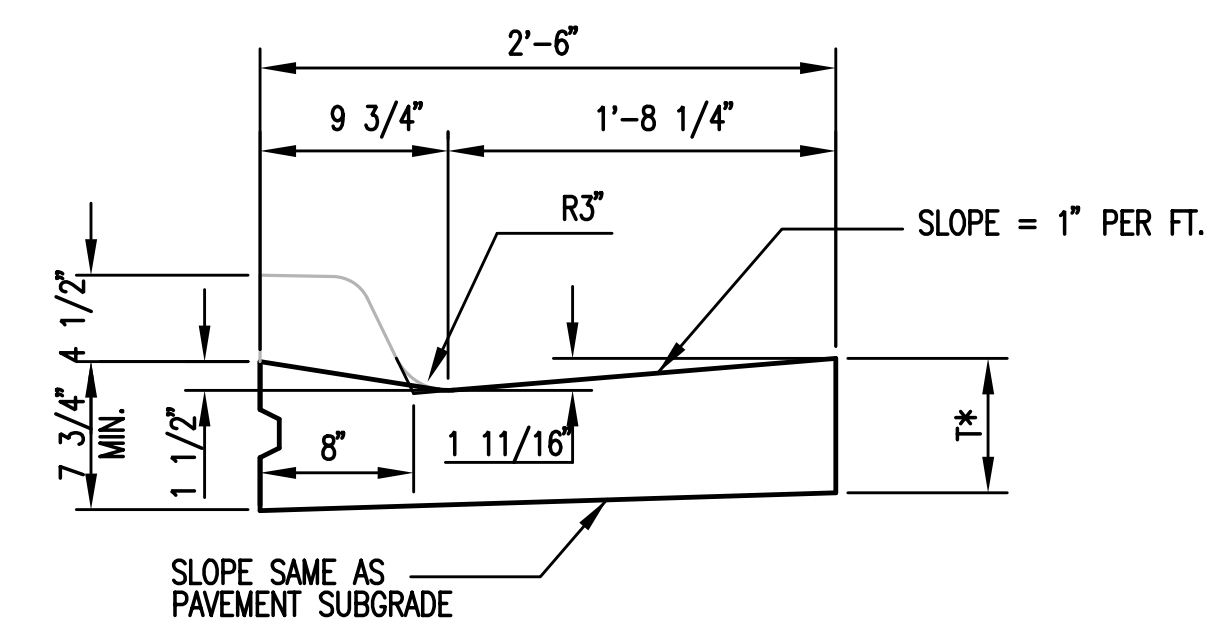


COMBINED CURB & GUTTER (1 1/2")

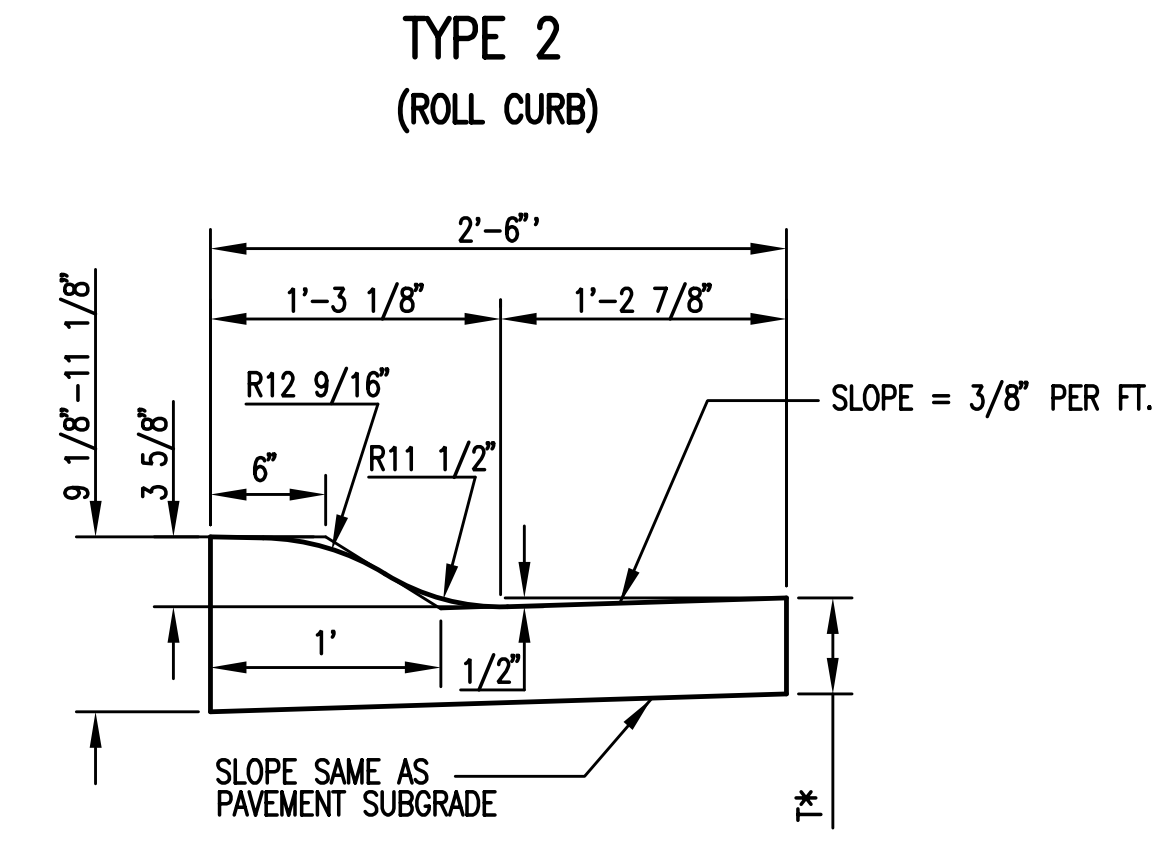


COMBINED CURB & GUTTER (3 5/8")

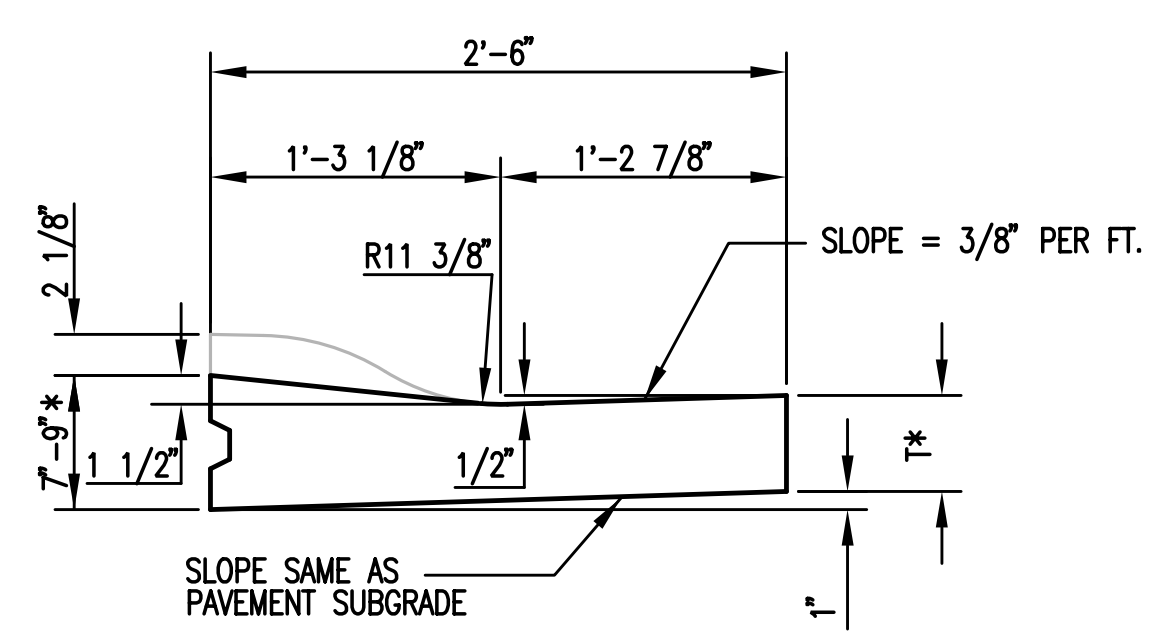


COMBINED CURB & GUTTER (1 1/2")

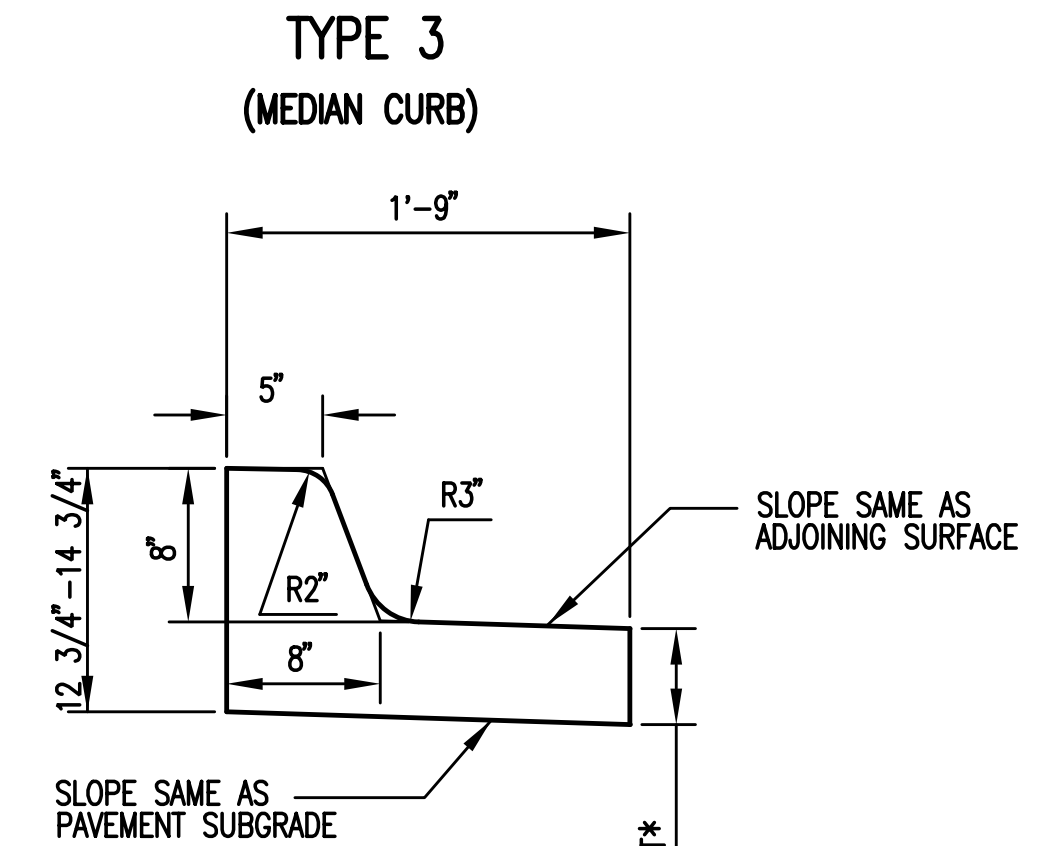


COMBINED CURB & GUTTER (8")

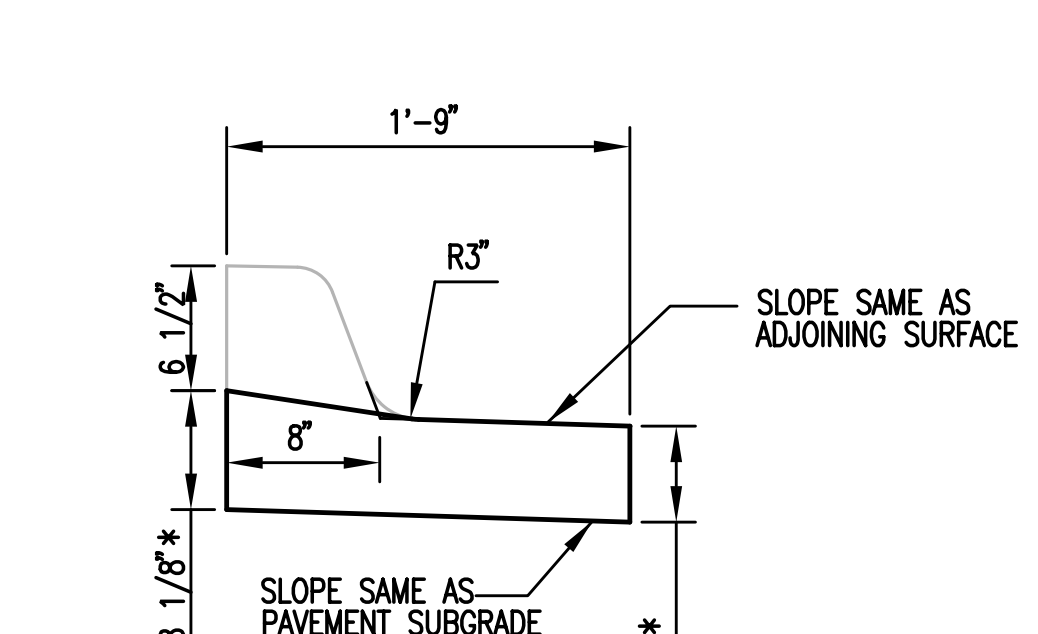

COMBINED CURB & GUTTER (1 1/2")

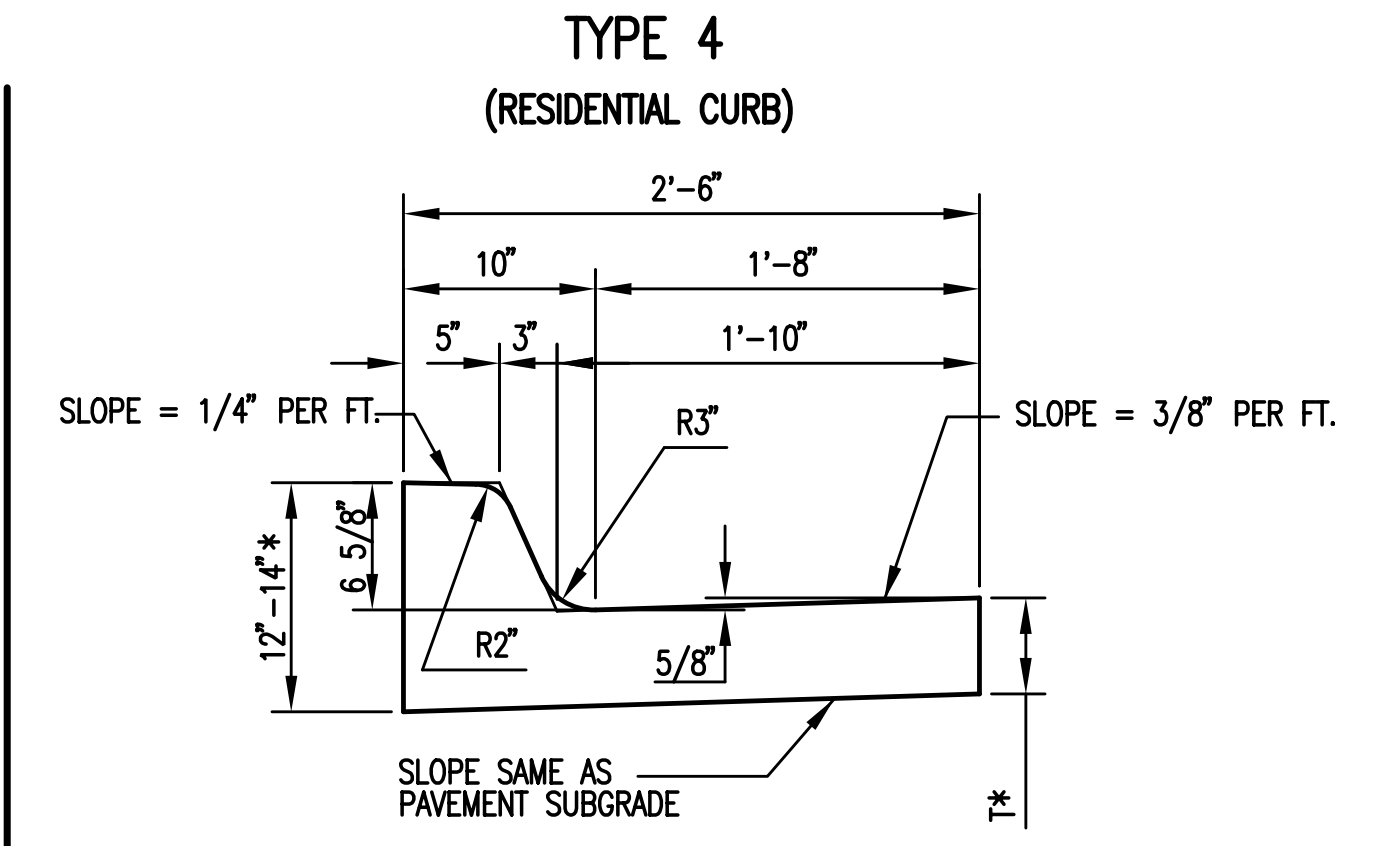

COMBINED CURB & GUTTER (6 5/8")

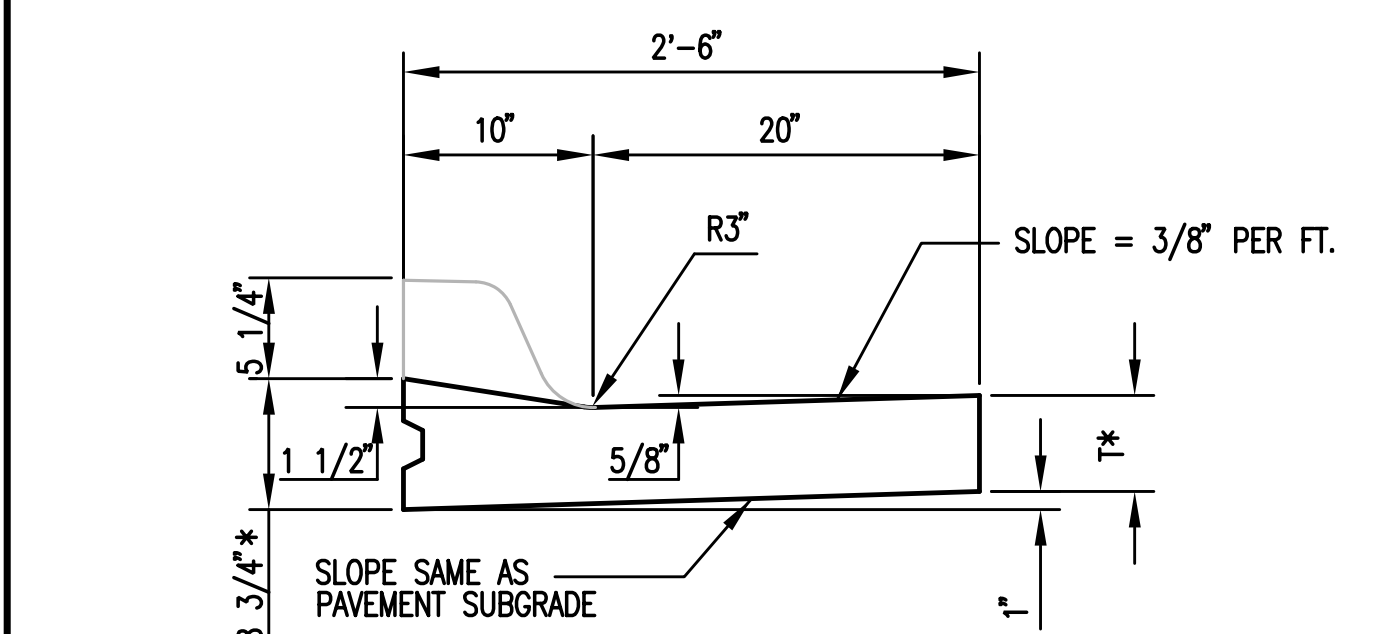


COMBINED CURB & GUTTER (1 1/2")


T\* = THICKNESS OF CURB TO ADJUST WITH PAVEMENT THICKNESS

GENERAL NOTES


1. EXPANSION (ISOLATION) JOINTS SHALL BE CONSTRUCTED A MAXIMUM OF 300' APART AND AT ALL PIS, PCS, CUL-DE-SAC QUADRANTS, AND ENDS OF RETURNS.
2. CONTRACTION JOINTS SHALL BE CONSTRUCTED A MINIMUM OF 12' APART.
3. JOINT SEALER SHALL BE REQUIRED AT ALL JOINTS ON ARTERIAL AND INDUSTRIAL STREETS AND AT INTERSECTIONS ON RESIDENTIAL STREETS.

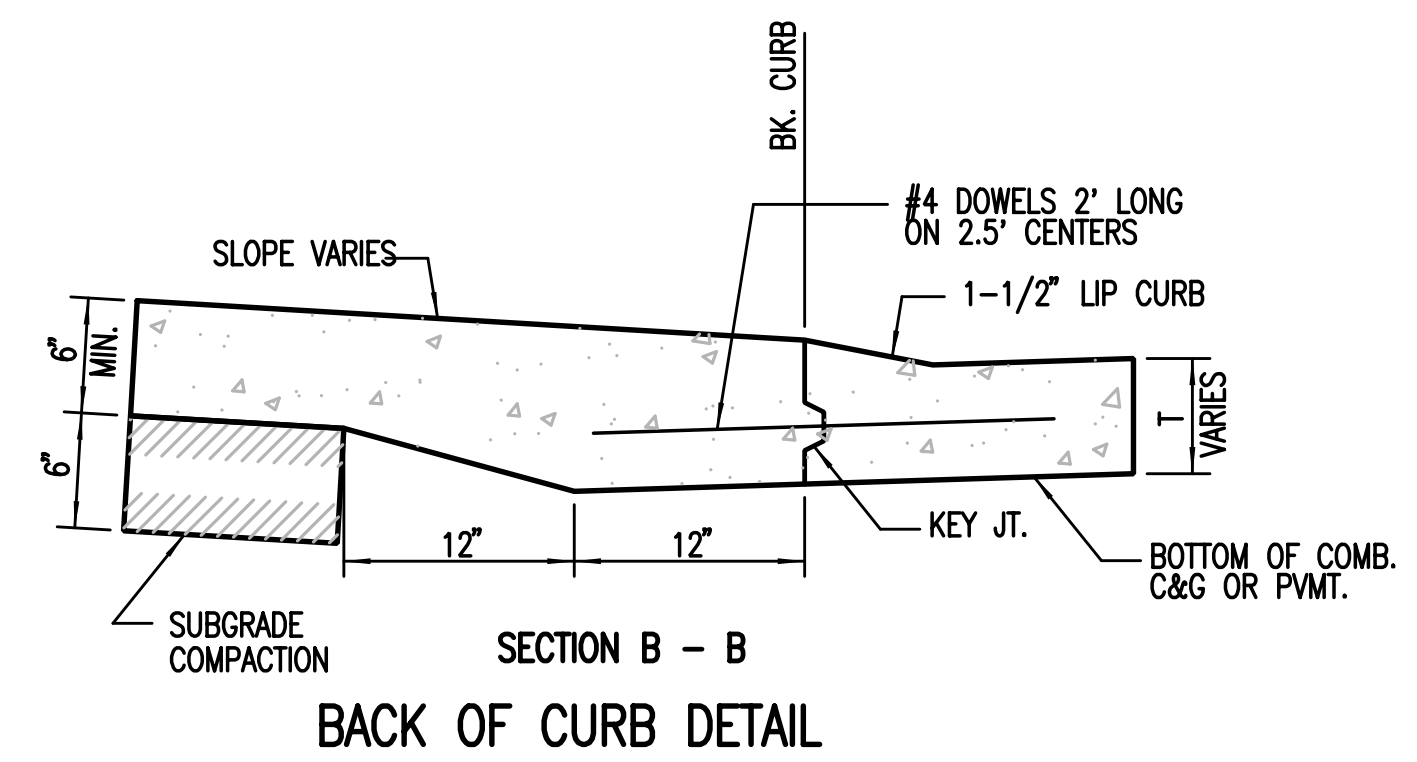

SECTION B - B  
BACK OF CURB DETAIL

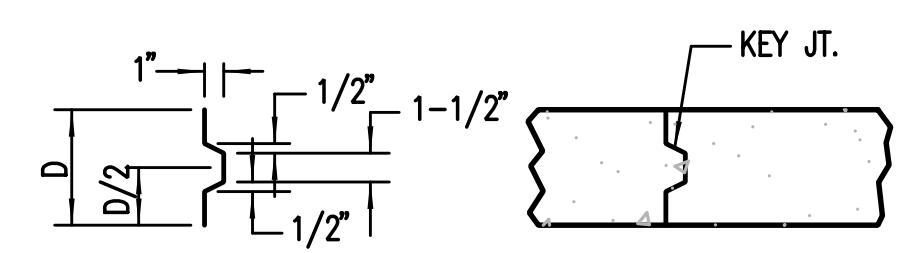

ALT. LONGITUDINAL CONSTRUCTION JOINT

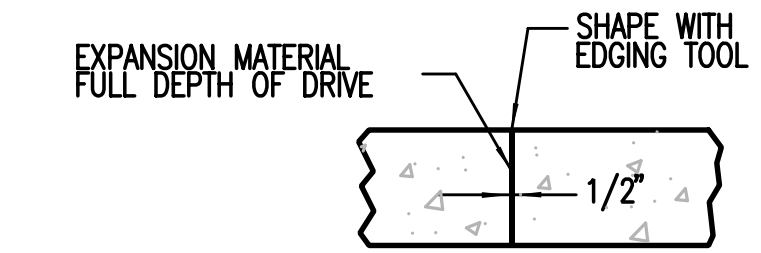

EXPANSION JOINT (E.J.)

			<b>CURB &amp; GUTTER DETAILS</b>		
			CITY ENGINEER <b>GARY JANZEN, P.E.</b>		
PROJECT NUMBER	OCA NUMBER	DATE	DESIGN	DRAWN	
472-85174	707074	12/2010			
CITY ENGINEER'S OFFICE CITY HALL - SEVENTH FLOOR 455 NORTH MAIN STREET WICHITA, KANSAS 67202-1620 (316) 268-4501			SHEET	8 of 28	

Created: 10-22-2012 2:10:13 PM by RFJ  
 Plot: Scale: 1:10  
 C:\STANDARD\Standards\Wichita\ Pavement\PV-101\_Curb\_&\_Gutter