



EROSION CONTROL NOTES

1. CONTRACTOR SHALL INSTALL CURLEX TYPE 1 EROSION CONTROL BLANKET (OR APPROVED EQUAL) IN AREA BETWEEN CURB AND SIDEWALK (8' MAXIMUM WIDTH)
2. INLET PROTECTION SHALL BE INSPECTED AND CLEANED AS OUTLINED IN THE STORMWATER POLLUTION PREVENTION PLAN

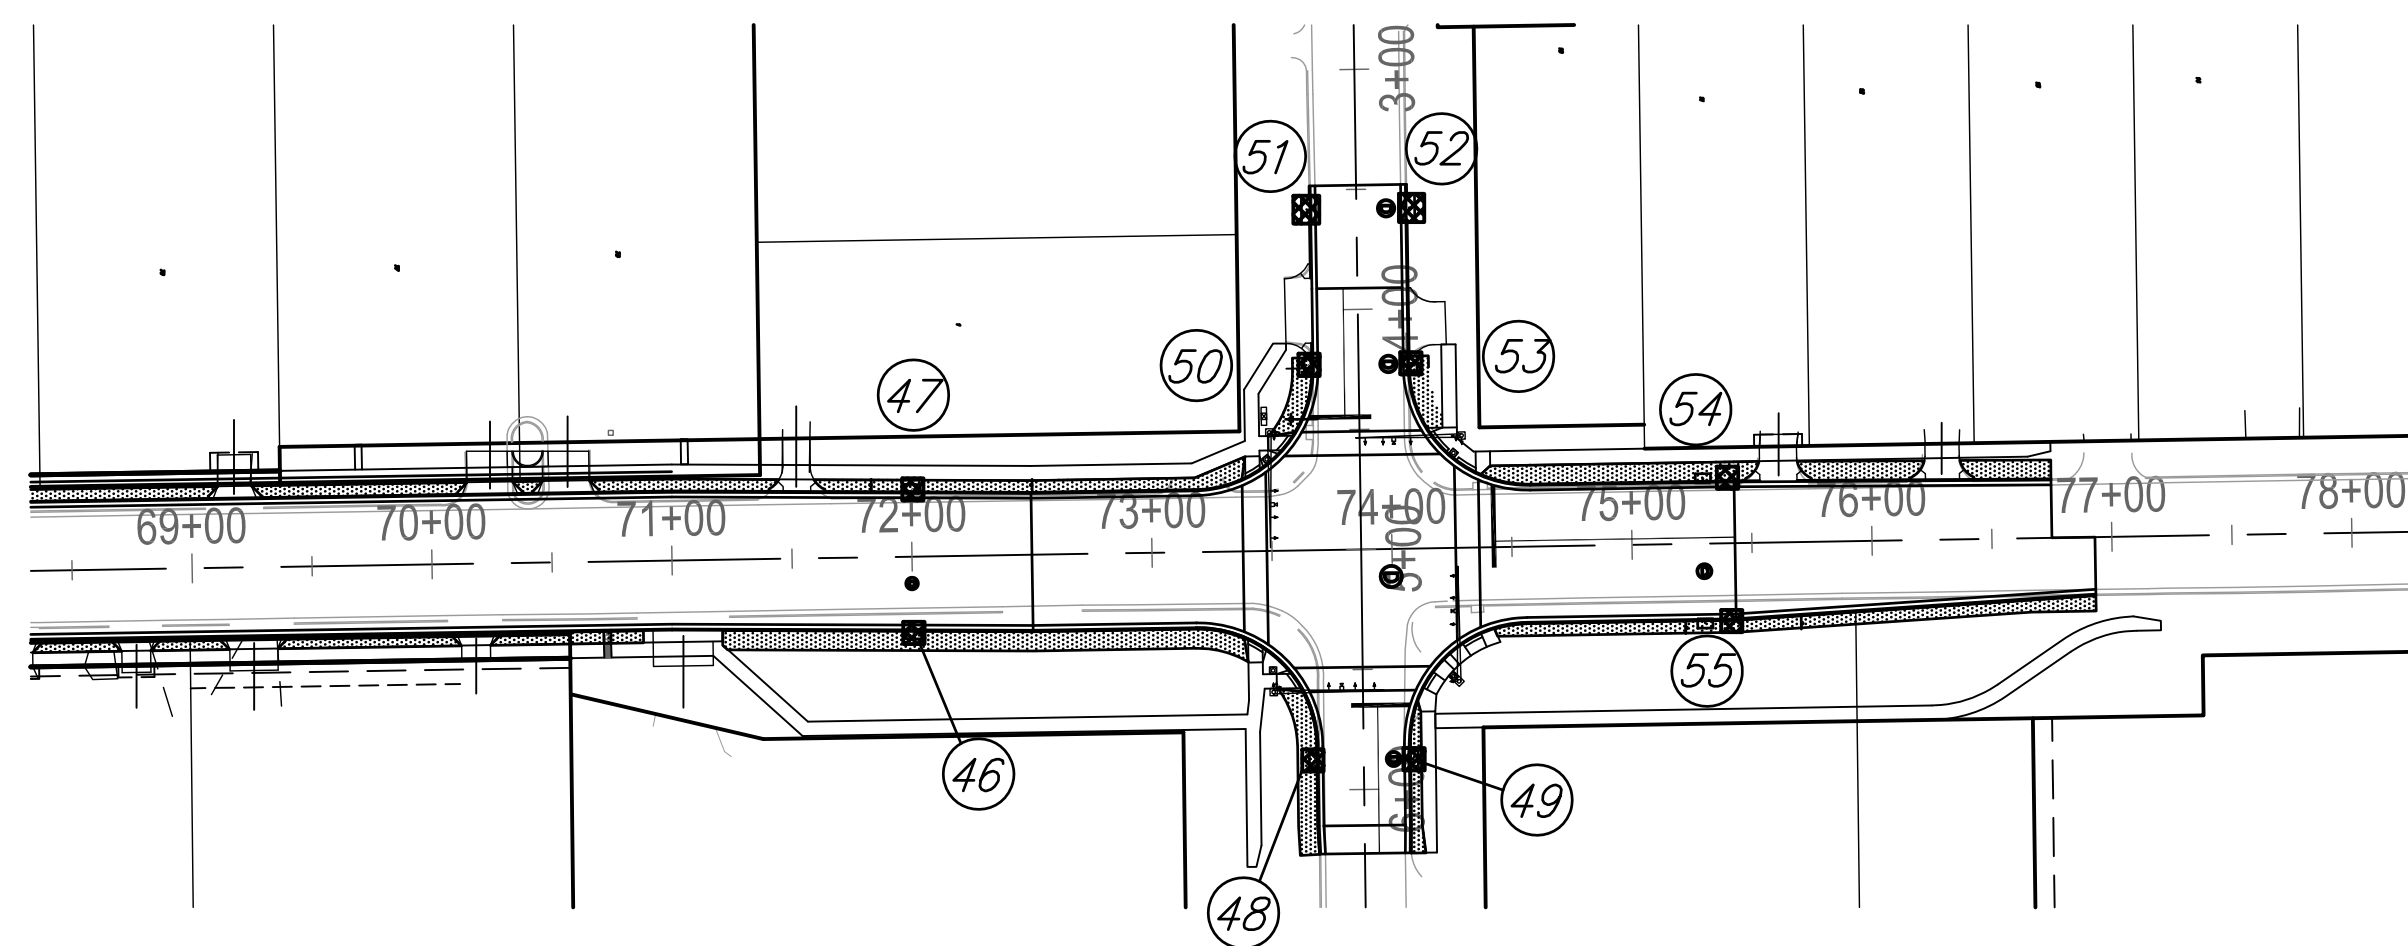

Inlet Protection



Erosion Control Blanket

PAVING IMPROVEMENTS EROSION CONTROL STA. 50+00 TO 77+00 WICHITA, KANSAS			
	RUGGLES & BOHM		DATE Oct. 23, 2014
	ENGINEERING SURVEYING LANDSCAPE ARCHITECTURE GOVERNMENT 924 NORTH MAIN WICHITA, KANSAS 67203 P (316) 264-8008 F (316) 264-4621 WWW.RBKANSAS.COM		DESIGN KWL
PROJECT NUMBER 472-84914	RB JOB NO. 3647T	DWG. SCALE 1"=80'	DRAWN NSK
DRAWING FILE ENGINEERING BASE {Erosion Control-2}			REVIEW SHEET 59 OF 133