




Combined Curb & Gutter (6")

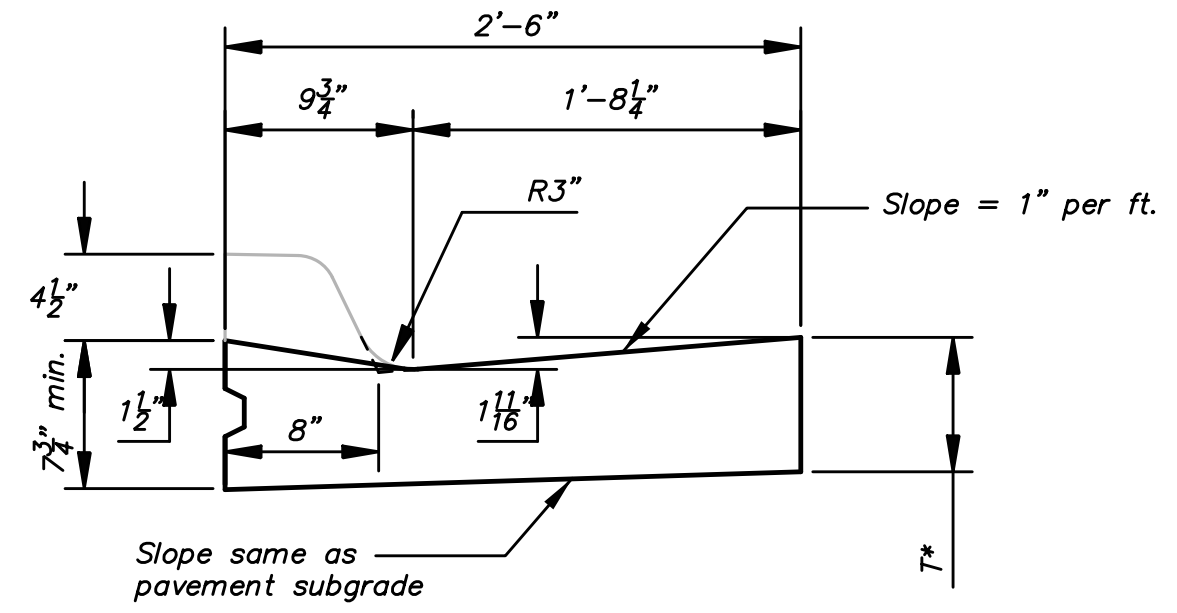


Combined Curb & Gutter (1 1/2")

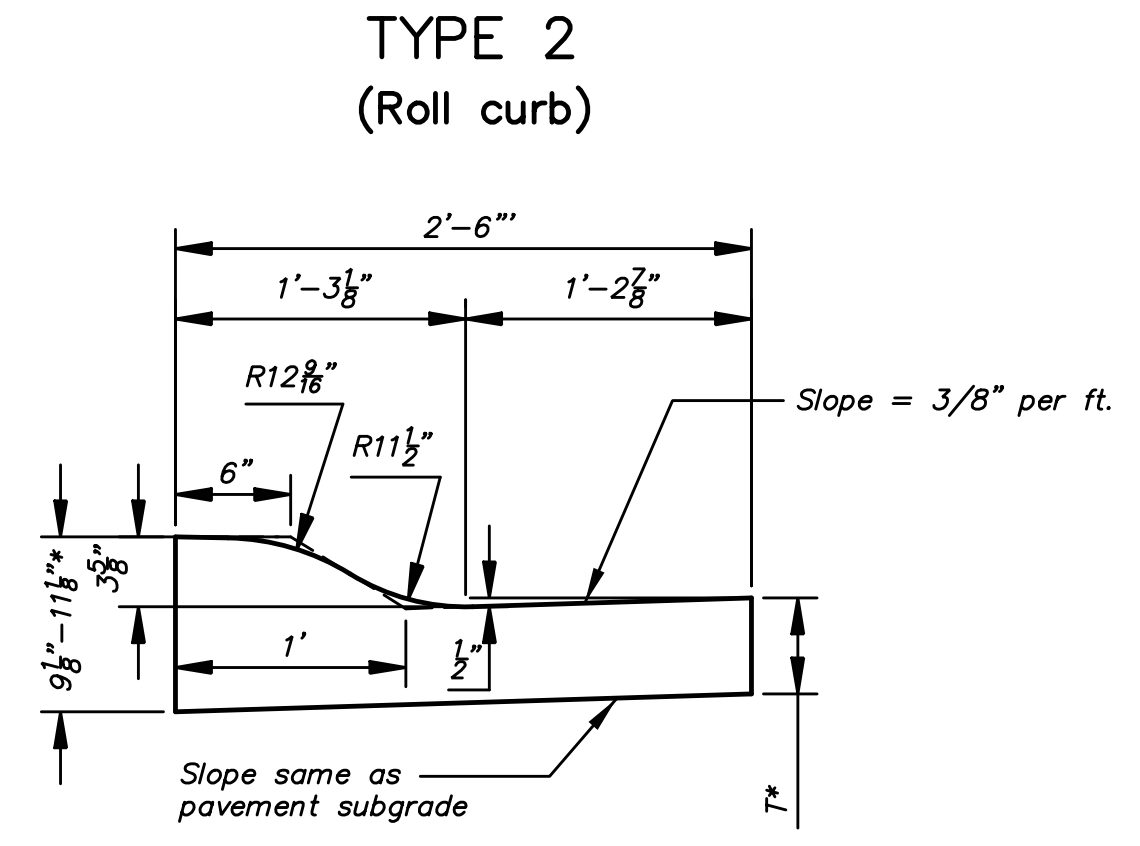


Combined Curb & Gutter (3 5/8")

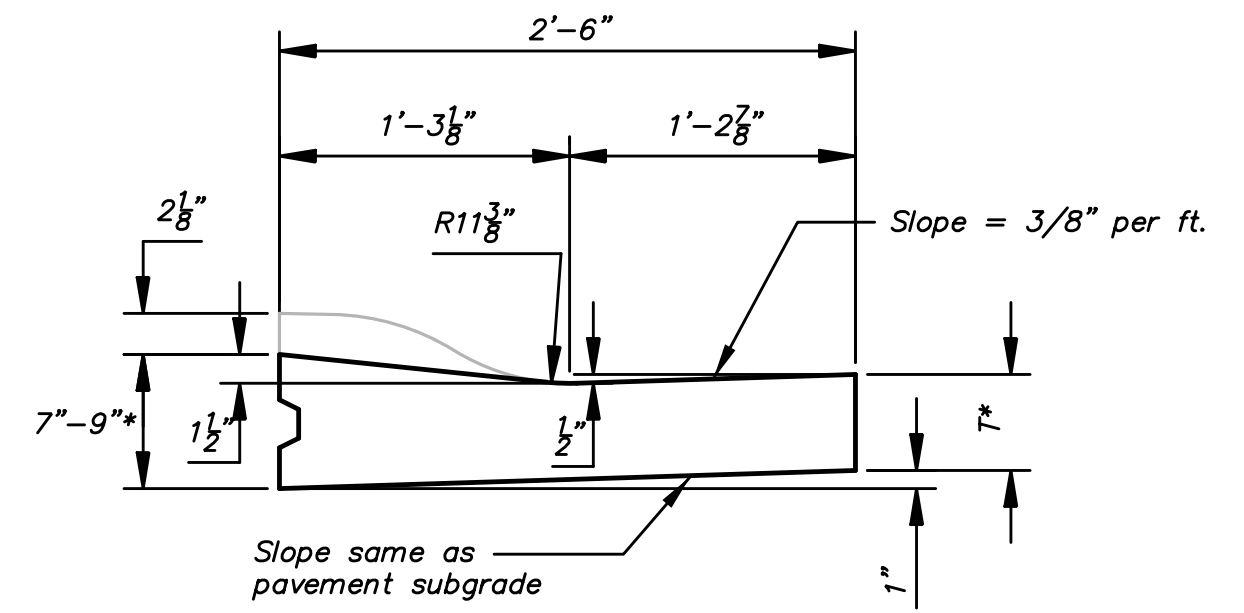


Combined Curb & Gutter (1 1/2")

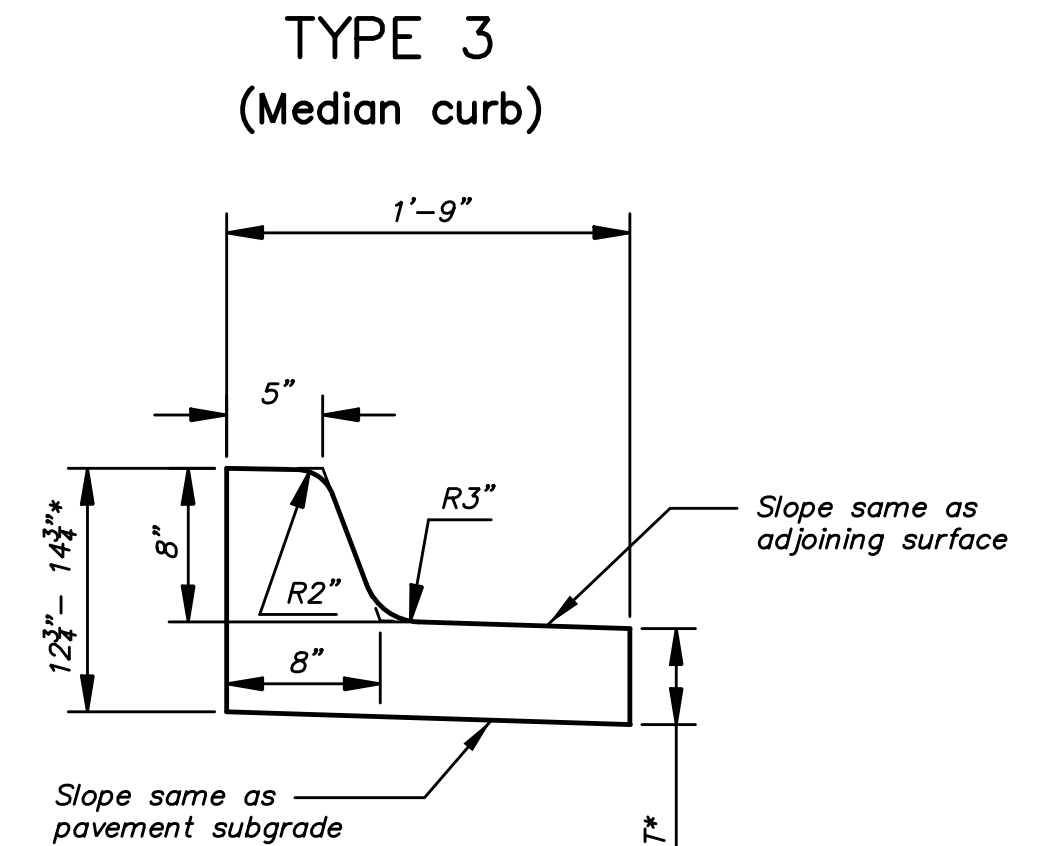


Combined Curb & Gutter (8")

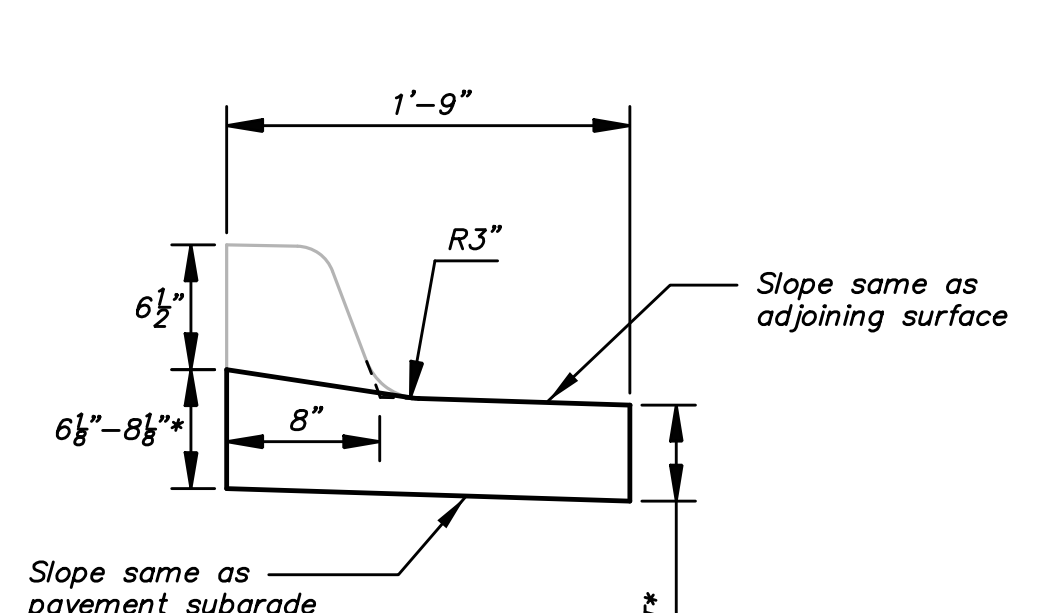

Combined Curb & Gutter (1 1/2")

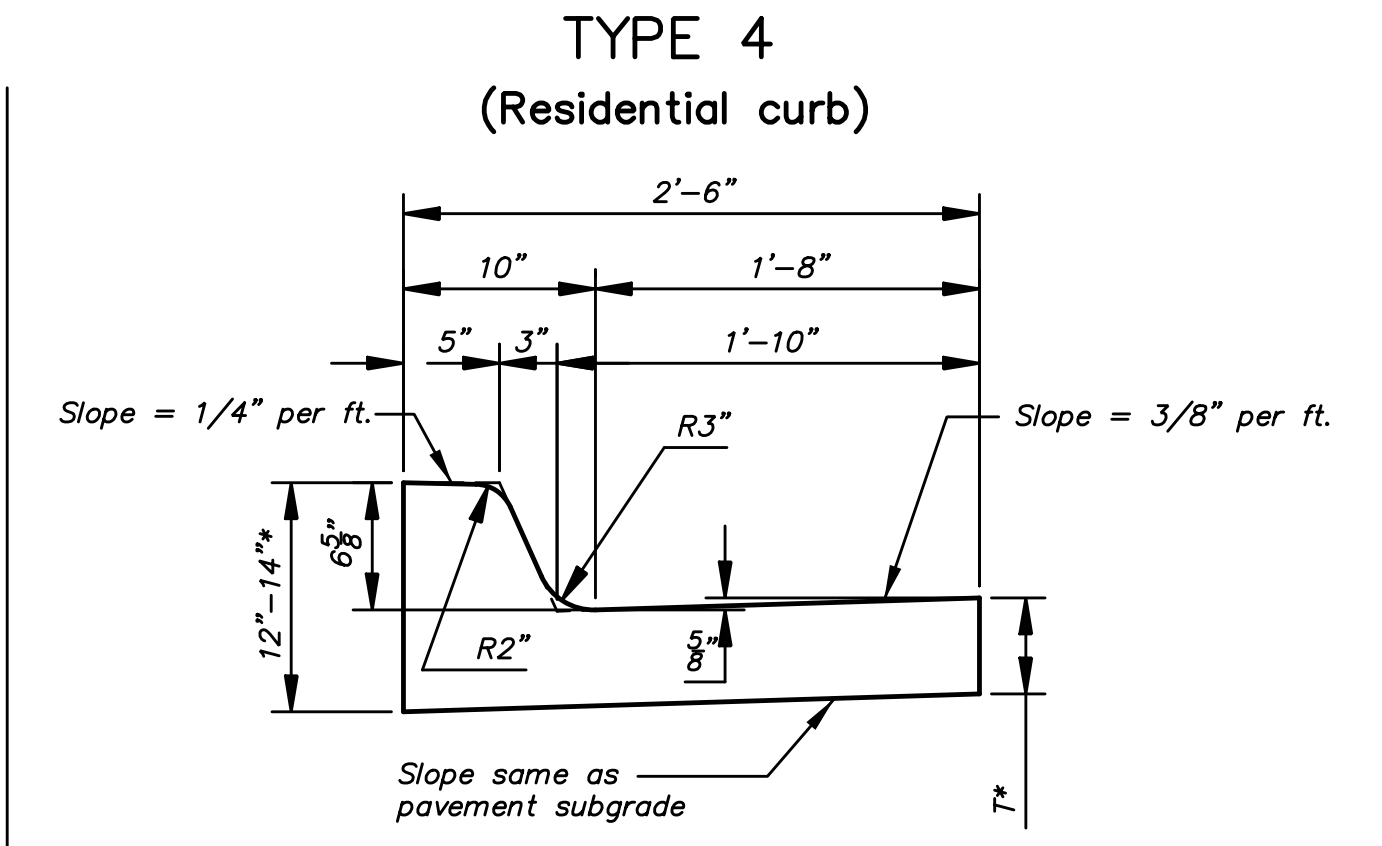

Combined Curb & Gutter (6 5/8")


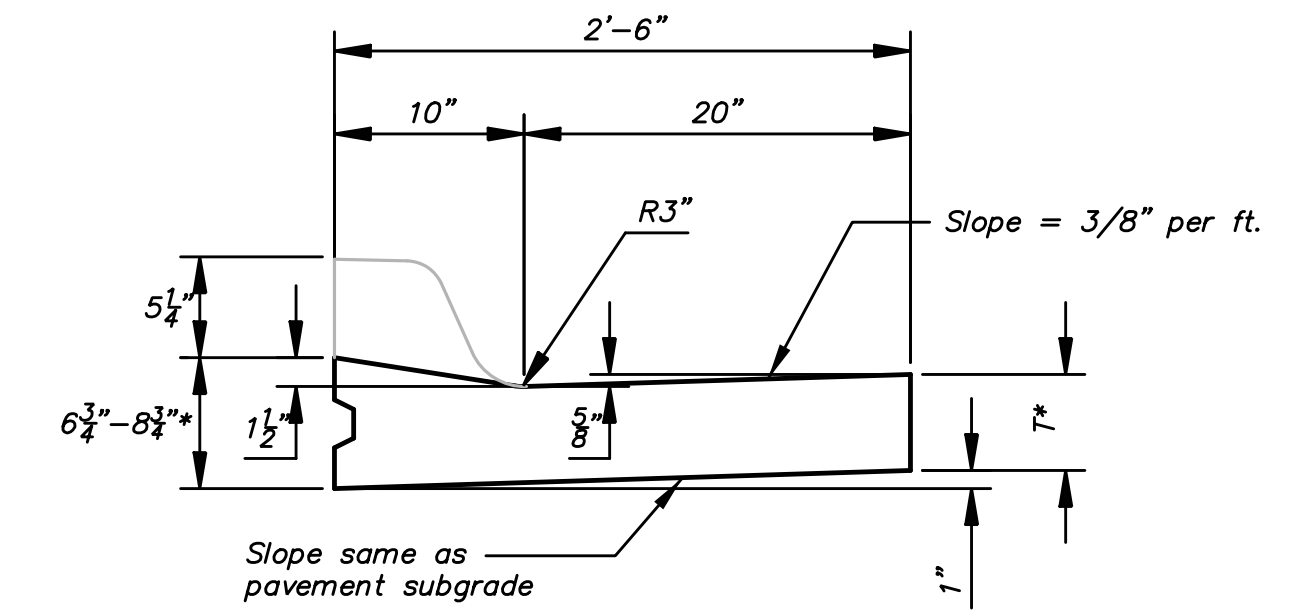


Combined Curb & Gutter (1 1/2")


T* = Thickness of curb to adjust with pavement thickness

GENERAL NOTES

1. Expansion (isolation) joints shall be constructed a maximum of 300' apart and at all Pls, PCs, cul-de-sac quadrants, and ends of returns.
2. Contraction joints shall be constructed a minimum of 12' apart.
3. Joint sealer shall be required at all joints on arterial and industrial streets and at intersections on residential streets.

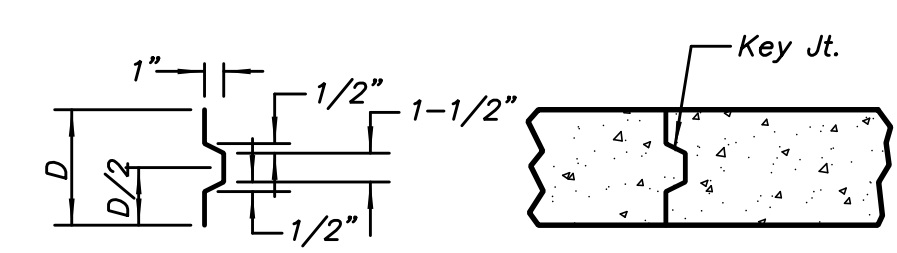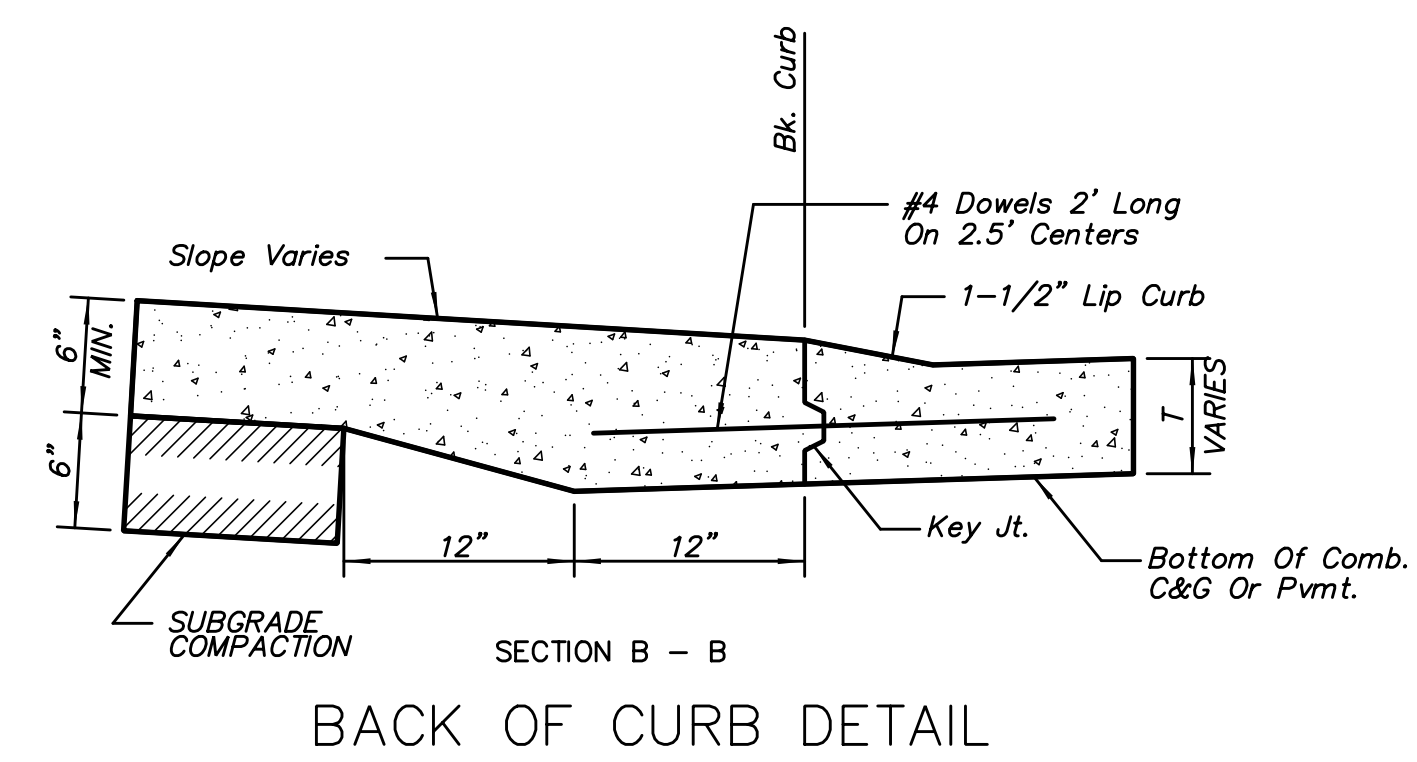

ALT. LONGITUDINAL CONSTRUCTION JOINT

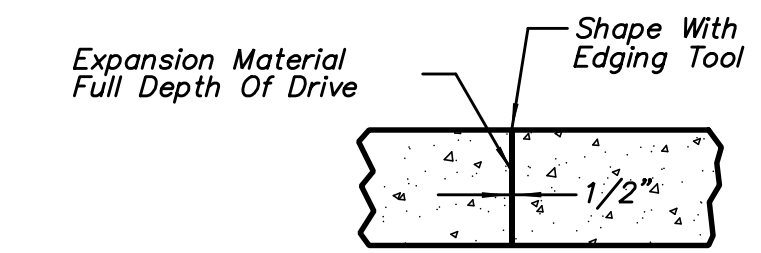

EXPANSION JOINT (E.J.)

Std. 01-14-2015 4:02:08 PM by RFJ
 Proj. Sops. 110
 C:\STANDARD\Standards\Wichita\Pavement\PV-101_Curb_&_Gutter

			CURB & GUTTER DETAILS		
			CITY ENGINEER GARY JANZEN, P.E.		
PROJECT NUMBER 472-85161	OCA NUMBER 707068	DATE 12/2010	SHEET 12 of 62		
CITY ENGINEER'S OFFICE CITY HALL - SEVENTH FLOOR 455 NORTH MAIN STREET WICHITA, KANSAS 67202-1620 (316) 268-4501					