


2010 SANITARY SEWER RECONSTRUCTION PHASE 5

OCA # 620565 / 468-84717
(East of Broadway, North of 31st Street South)

<u>SITE NO.</u>	<u>GENERAL LOCATION</u>	<u>PIPE SIZE</u>	<u>UPSTREAM MANHOLE</u>	<u>DOWNSTREAM MANHOLE</u>	<u>UPSTREAM INVERT ELEVATION</u> <small>(City Datum)</small>	<u>DOWNSTREAM INVERT ELEVATION</u> <small>(City Datum)</small>	<u>LENGTH (FT.)</u>
1	At Mt. Vernon Street, east of Edgemoor	8"	5845-087	5845-086	One 60' Point Repair		
2 (Map 1)	In Wassall, between Victoria and Hydraulic	8"	5544-372	5544-371	88.53	88.39	134
		8"	5544-371	5544-370	88.39	88.08	305
2 (Map 2)	Between Denker & Graber Streets, east of Lulu	8"	5544-377	5544-376	One 10' & One 23' Point Repair		
3	In Vassar, at Murdock Street	8"	5748-028	5748-027	One 25' Point Repair		
						Total liner feet =	----- 439

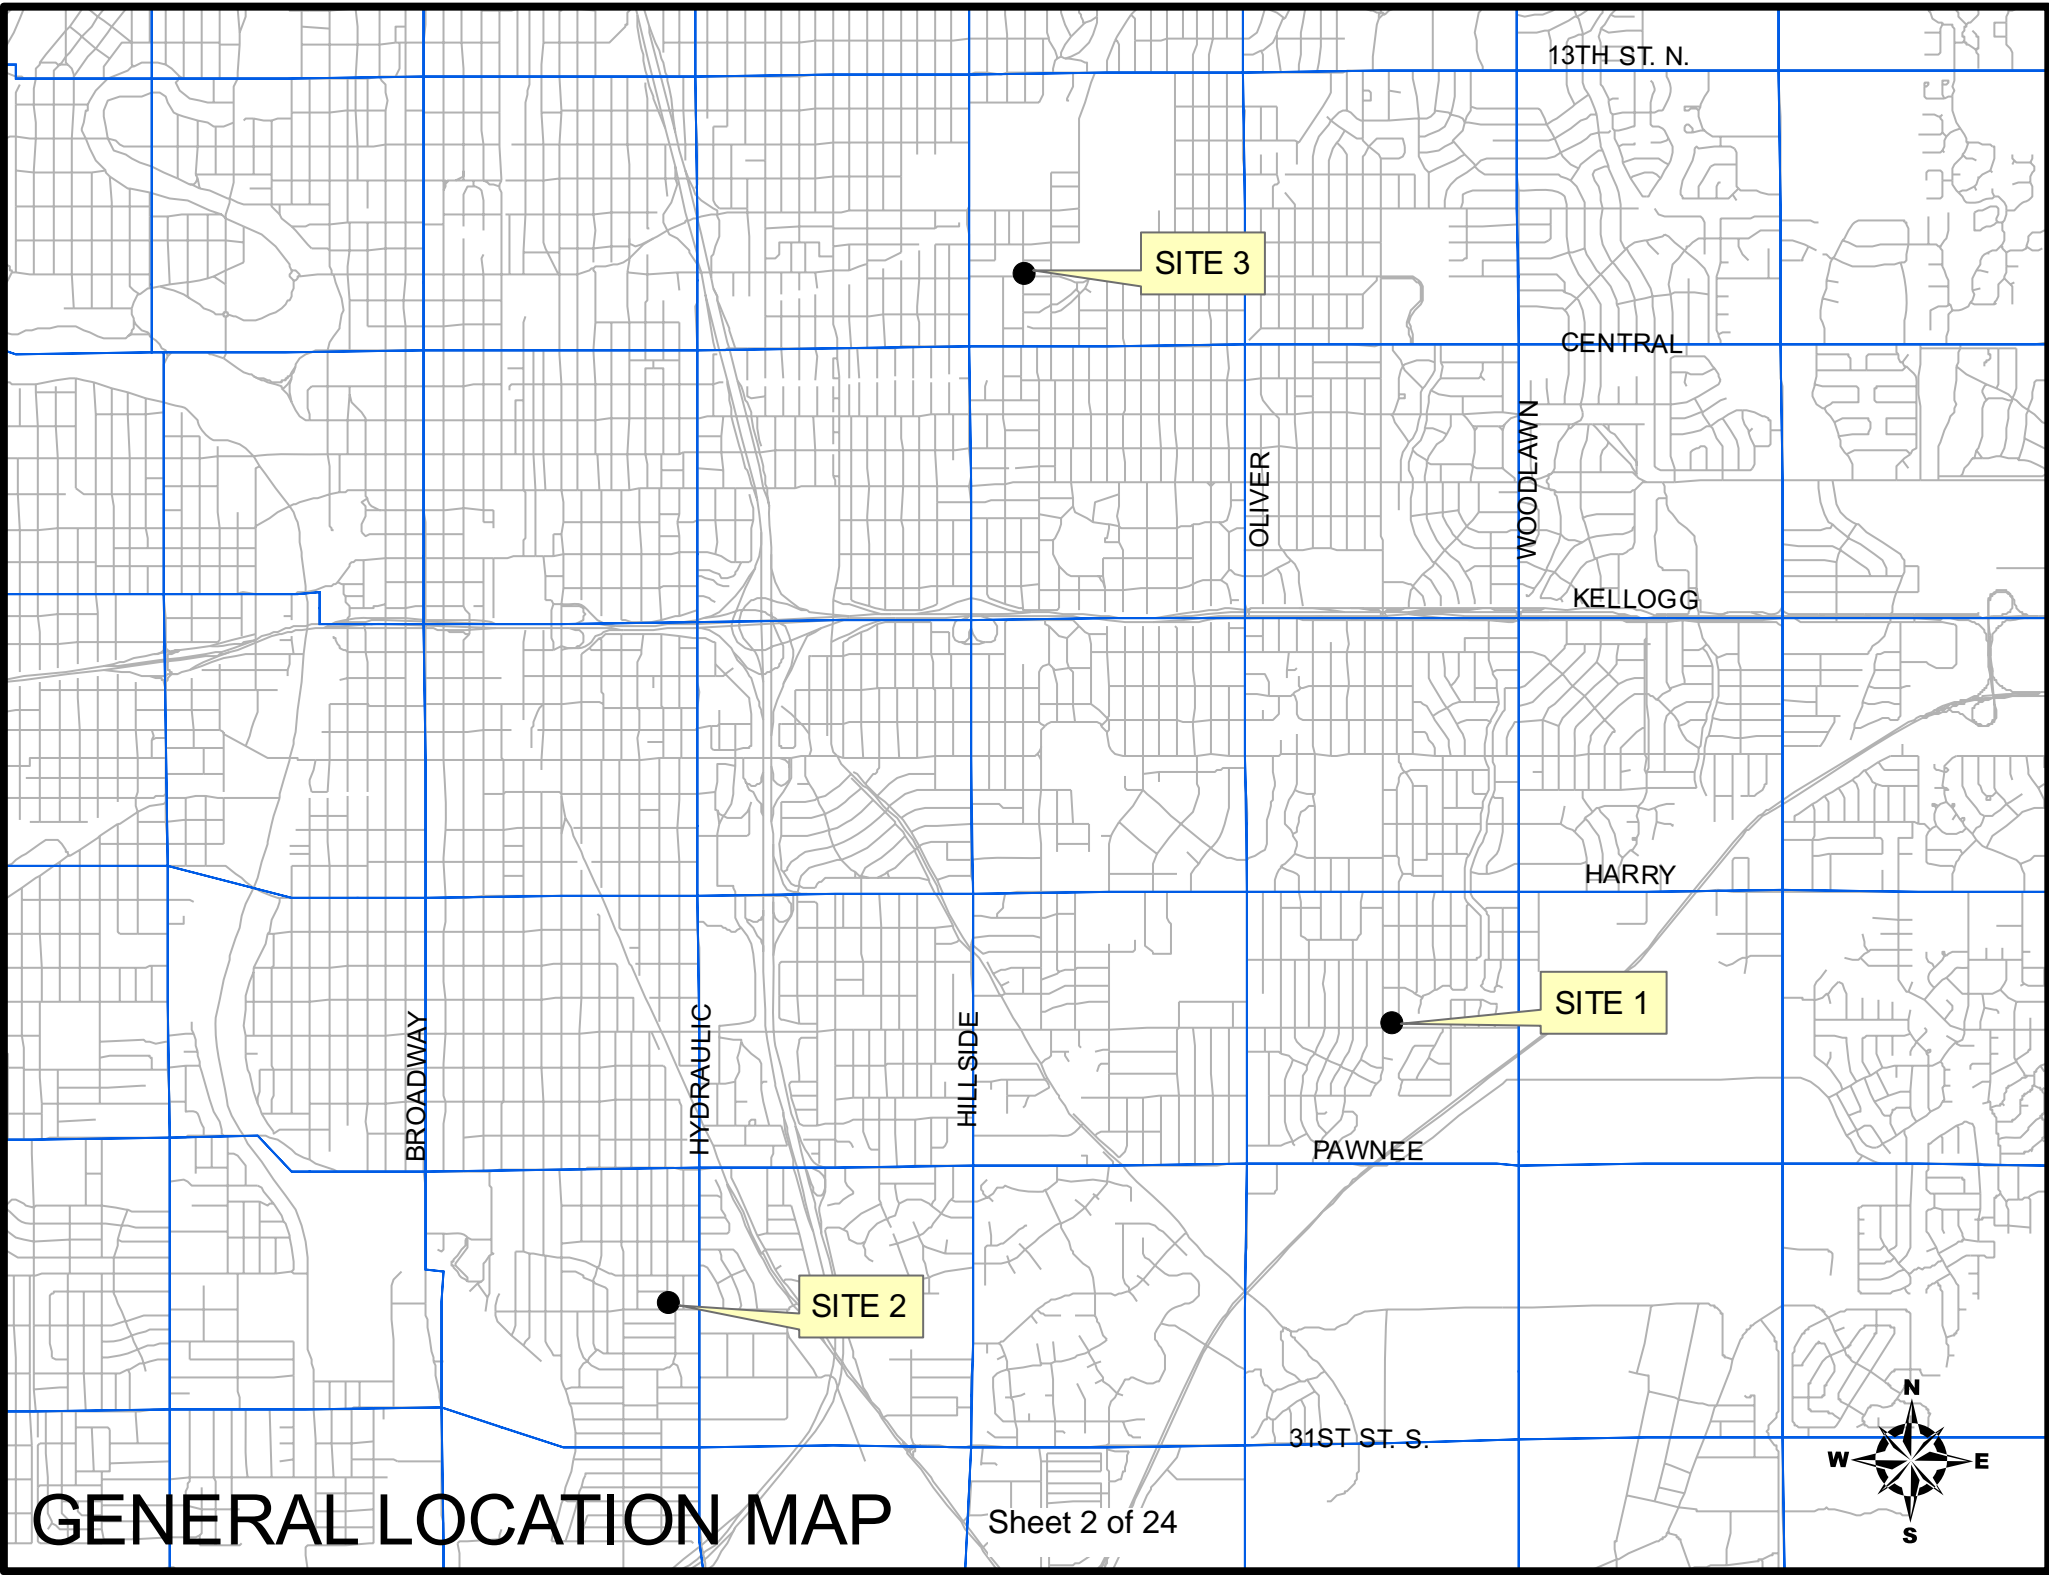

13TH ST. N.

SITE 3

CENTRAL

OLIVER

WOODLAWN

KELLOGG

HARRY

SITE 1

PAWNEE

SITE 2

BROADWAY

HYDRAULIC

HILLSIDE

31ST ST. S.

GENERAL LOCATION MAP



Bid Items by Site Reference

2010 Sanitary Sewer Reconstruction Phase 5

<u>Item</u>	<u>Site 1</u>	<u>Site 2</u>	<u>Site 3</u>	<u>Totals</u>	
Pipe, Removed & Replaced, 8"		439		439	lf
Pipe, Point Repair, (60 lf) Site 1	1			1	ls
Pipe, Point Repair, (10 lf) Site 2		1		1	ls
Pipe, Point Repair, (23 lf) Site 2		1		1	ls
Pipe, Point Repair, (25 lf) Site 3			1	1	ls
MH Reconstructed		4		4	ea
MH Frame & Cover, Replaced	1		1	2	ea
MH Bench & Invert, Removed & Replaced	1			1	ea
Concrete Driveway Removed & Replaced		20		20	lf
AC Pavement Removed & Replaced		31		31	lf
Fill, Flowable		57		57	lf
BMP Erosion Control				1	ls
Site Clearing				1	ls
Site Restoration				1	ls