


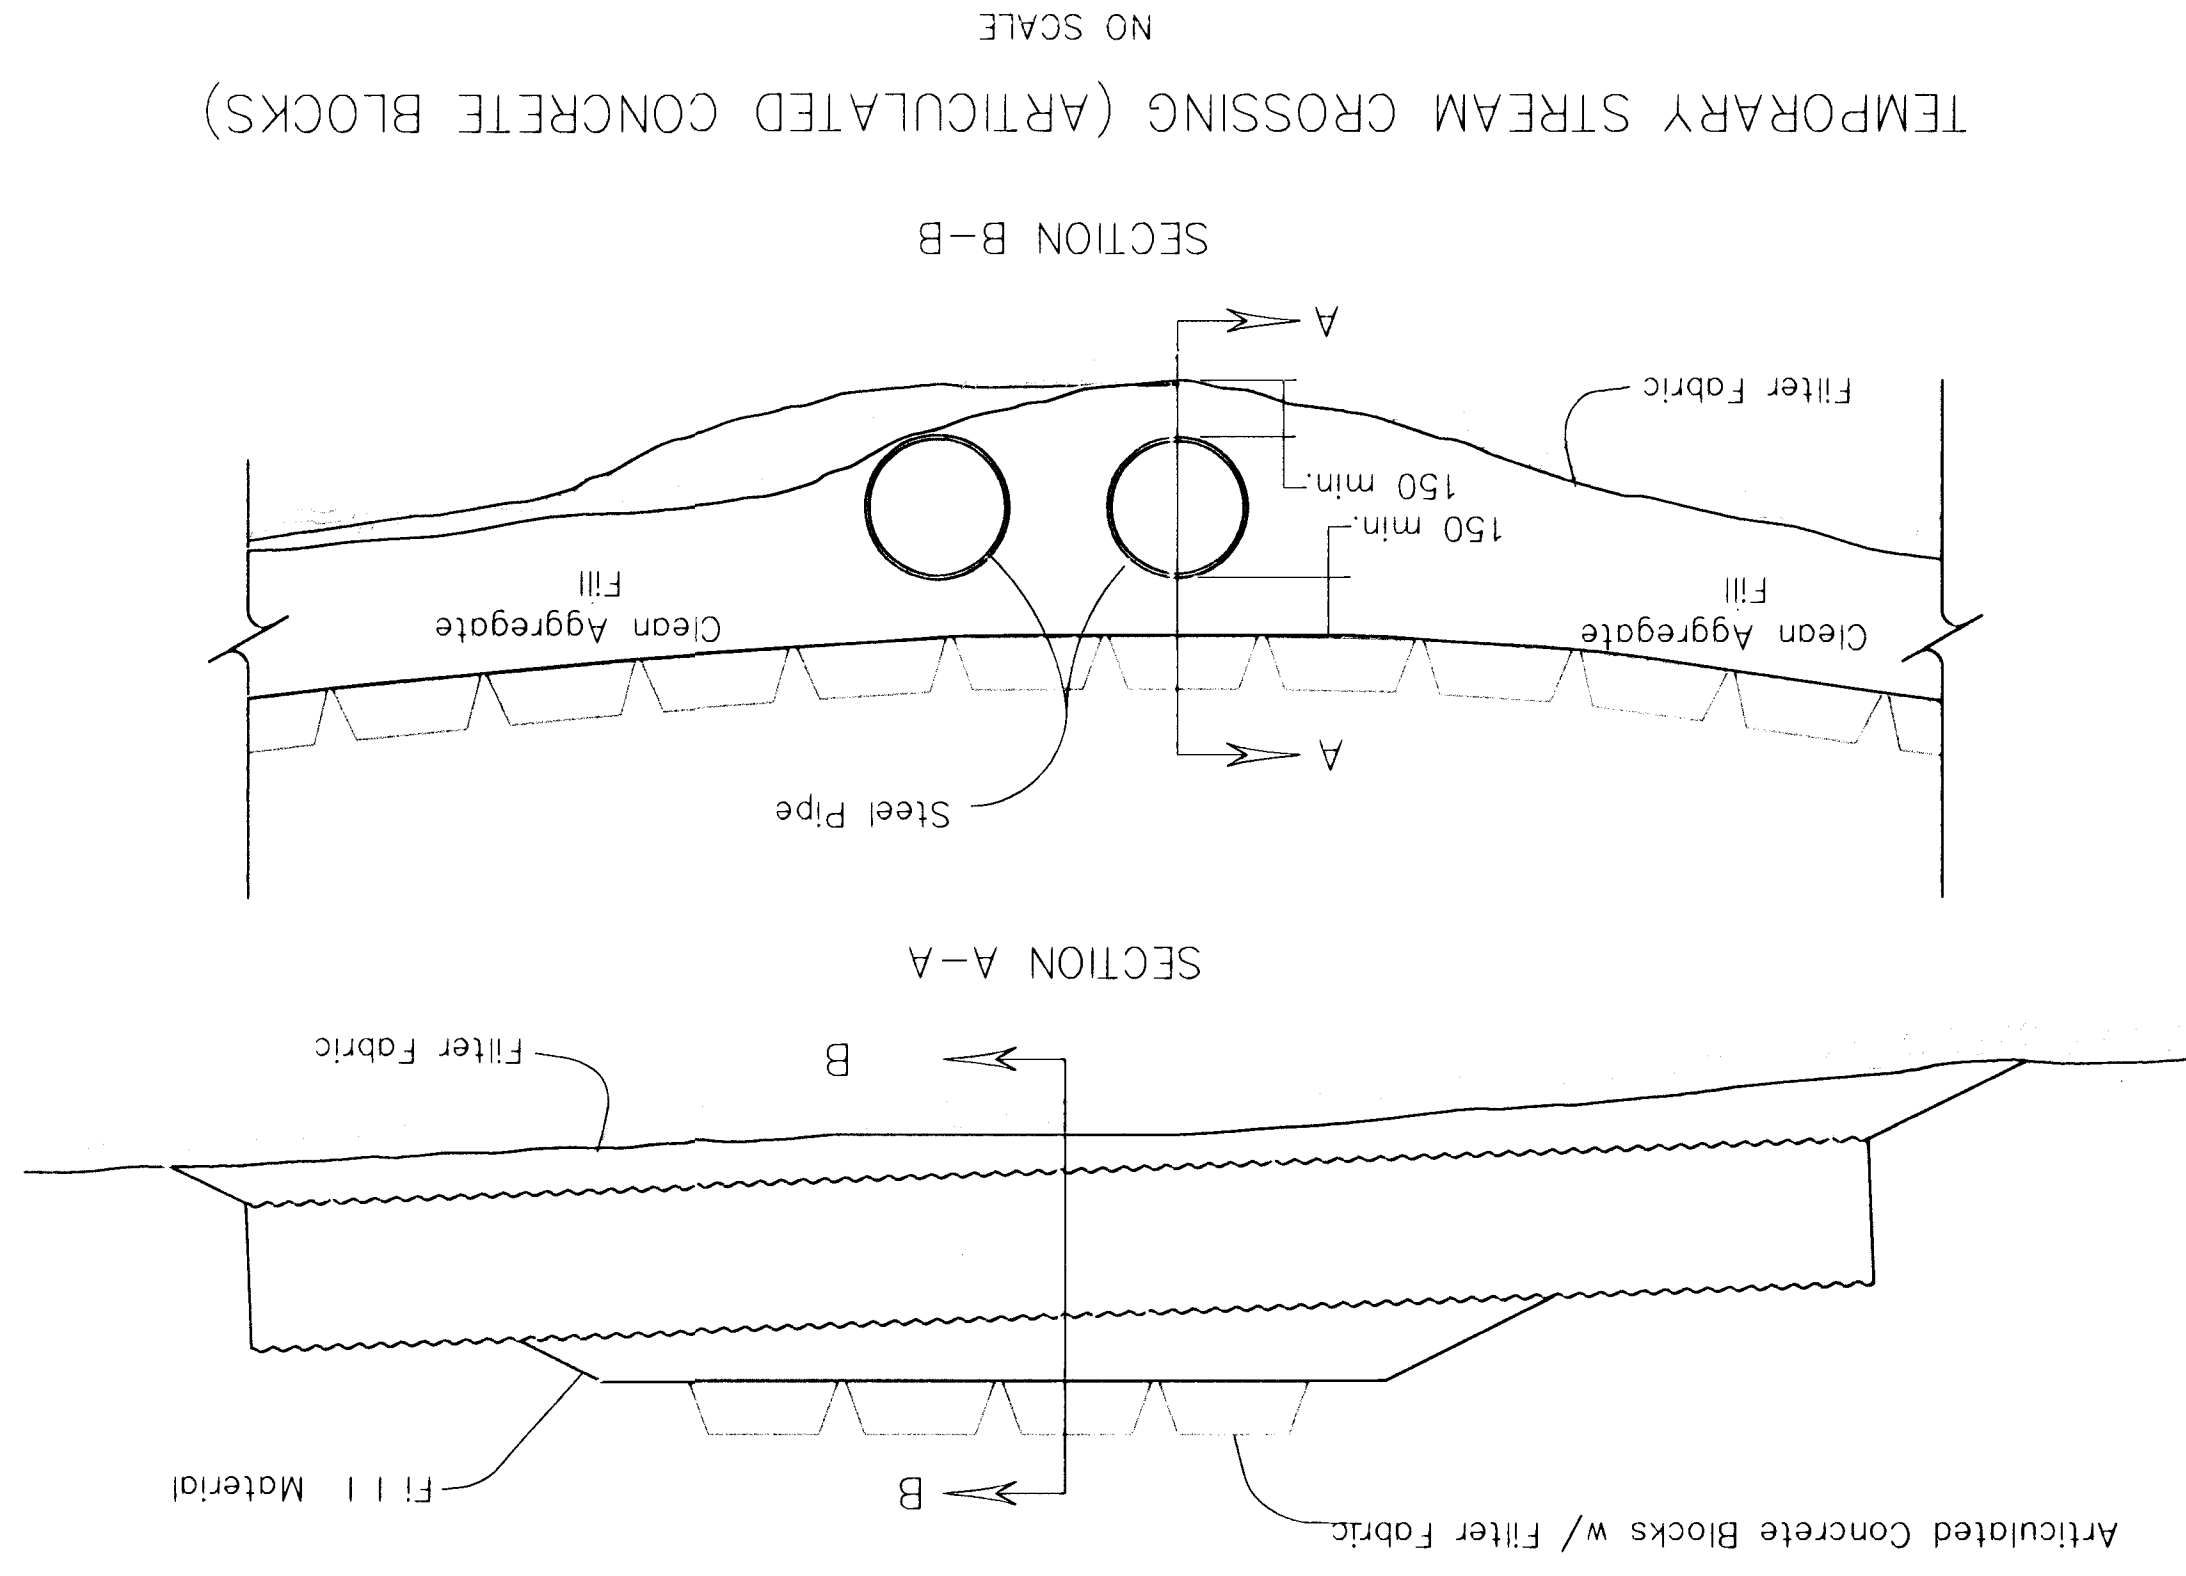


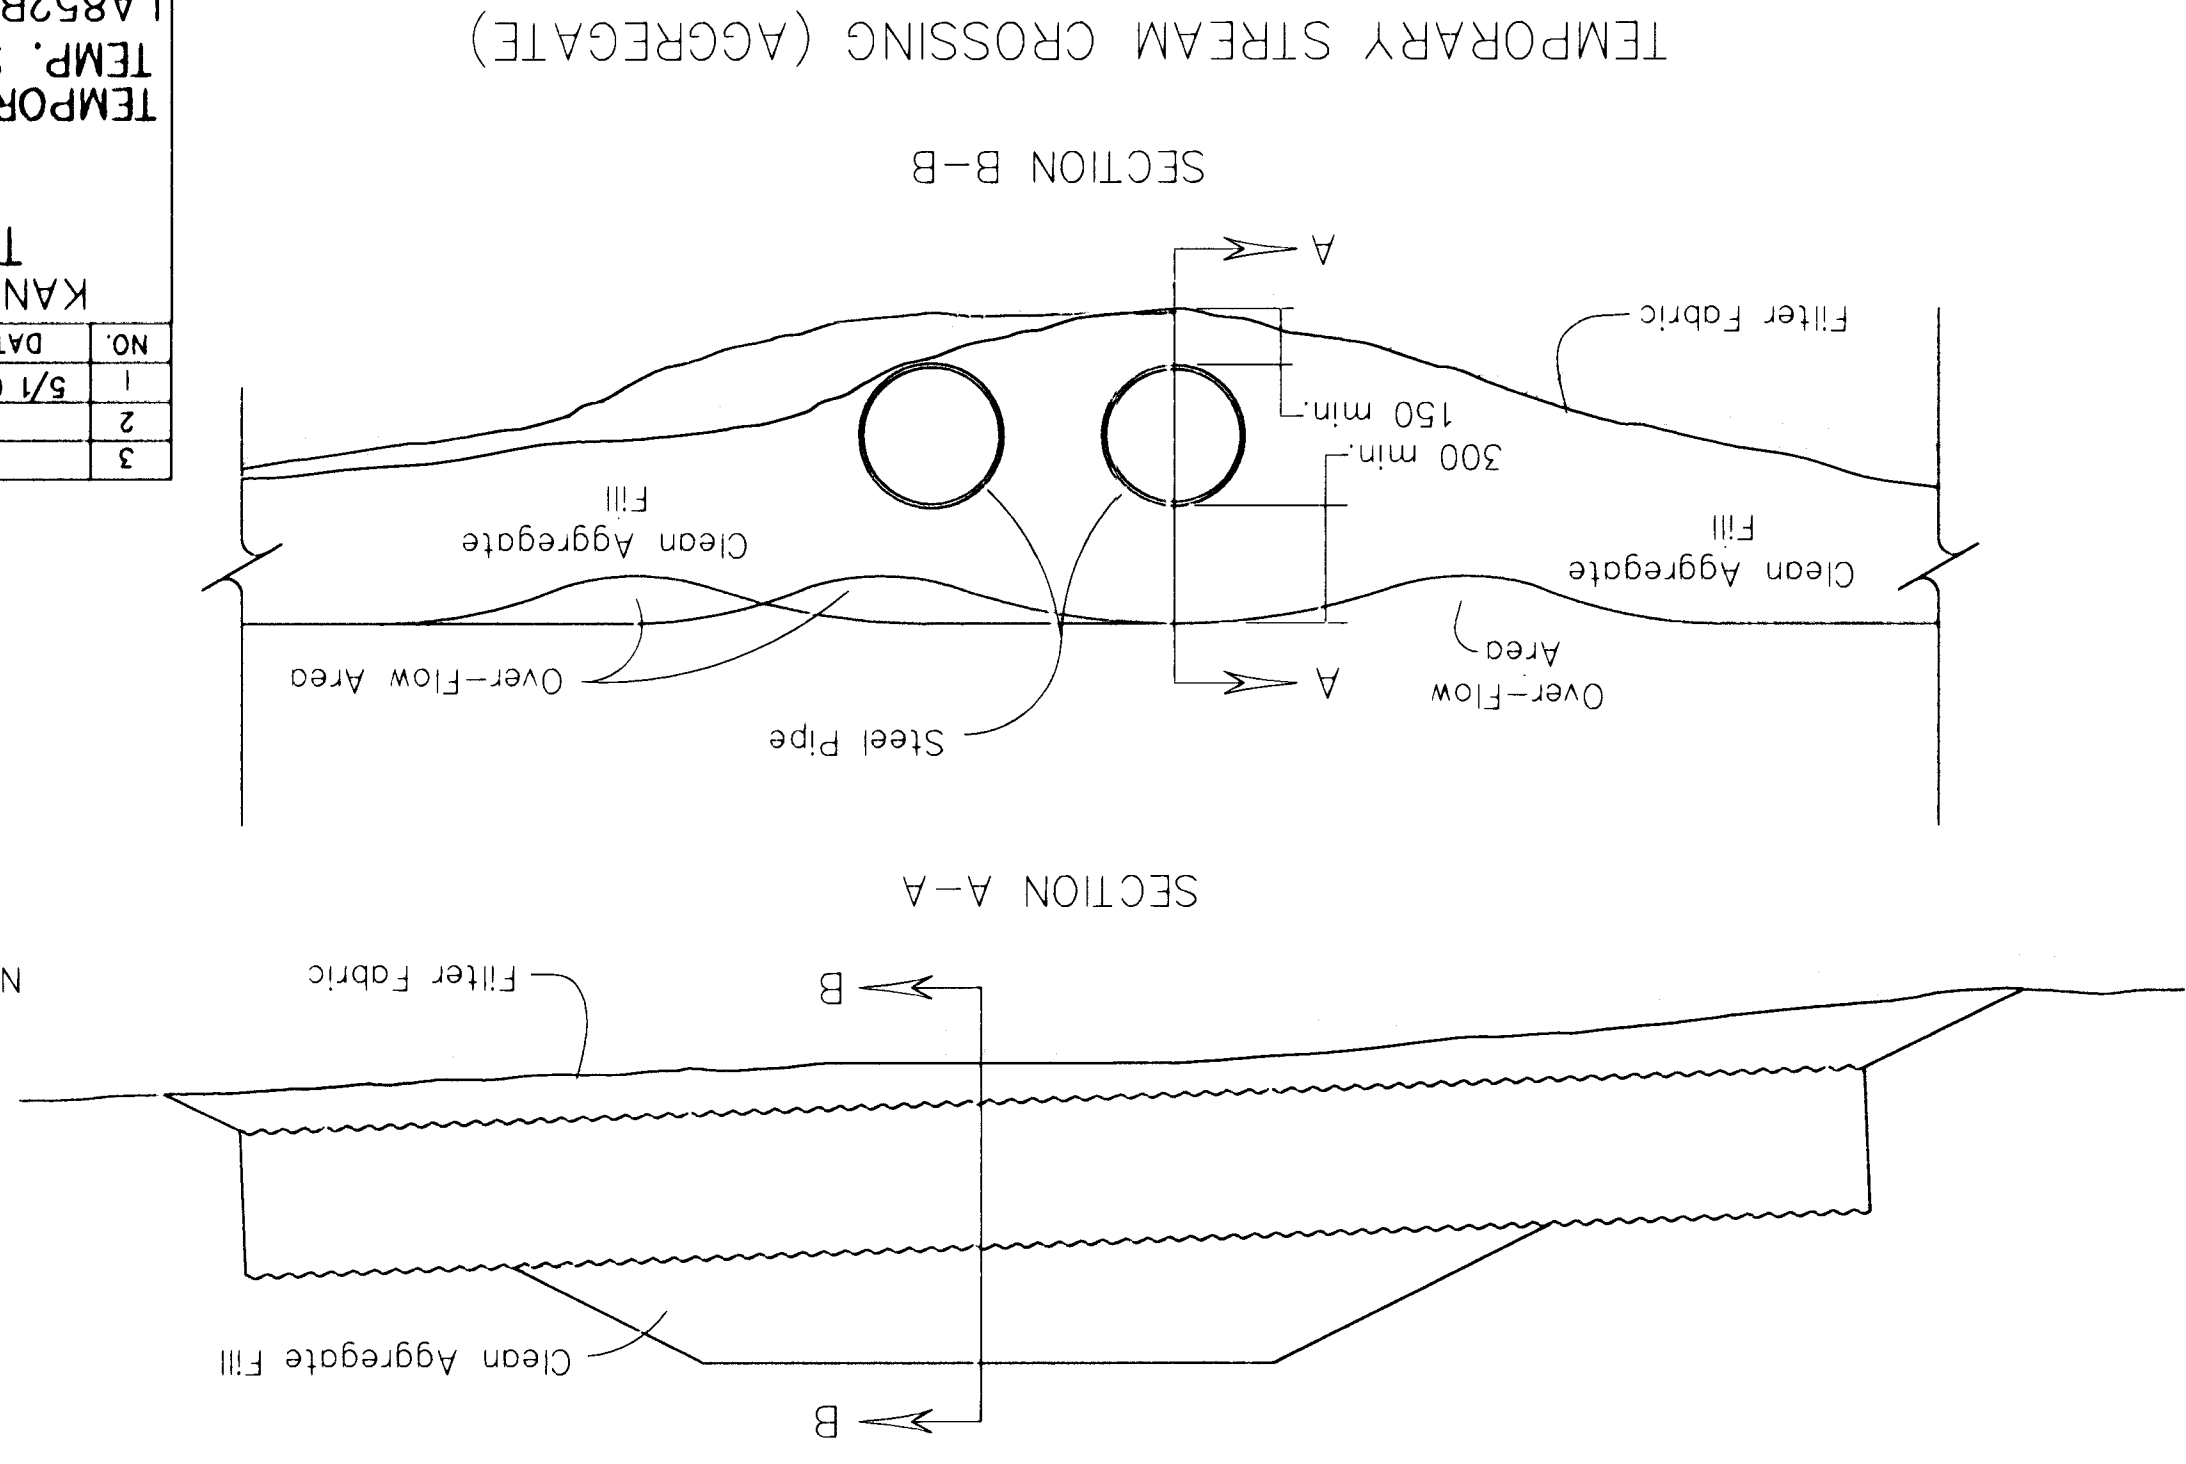

NOTE: Quantity, length and diameter of steel pipe to be determined by design flow calculations.

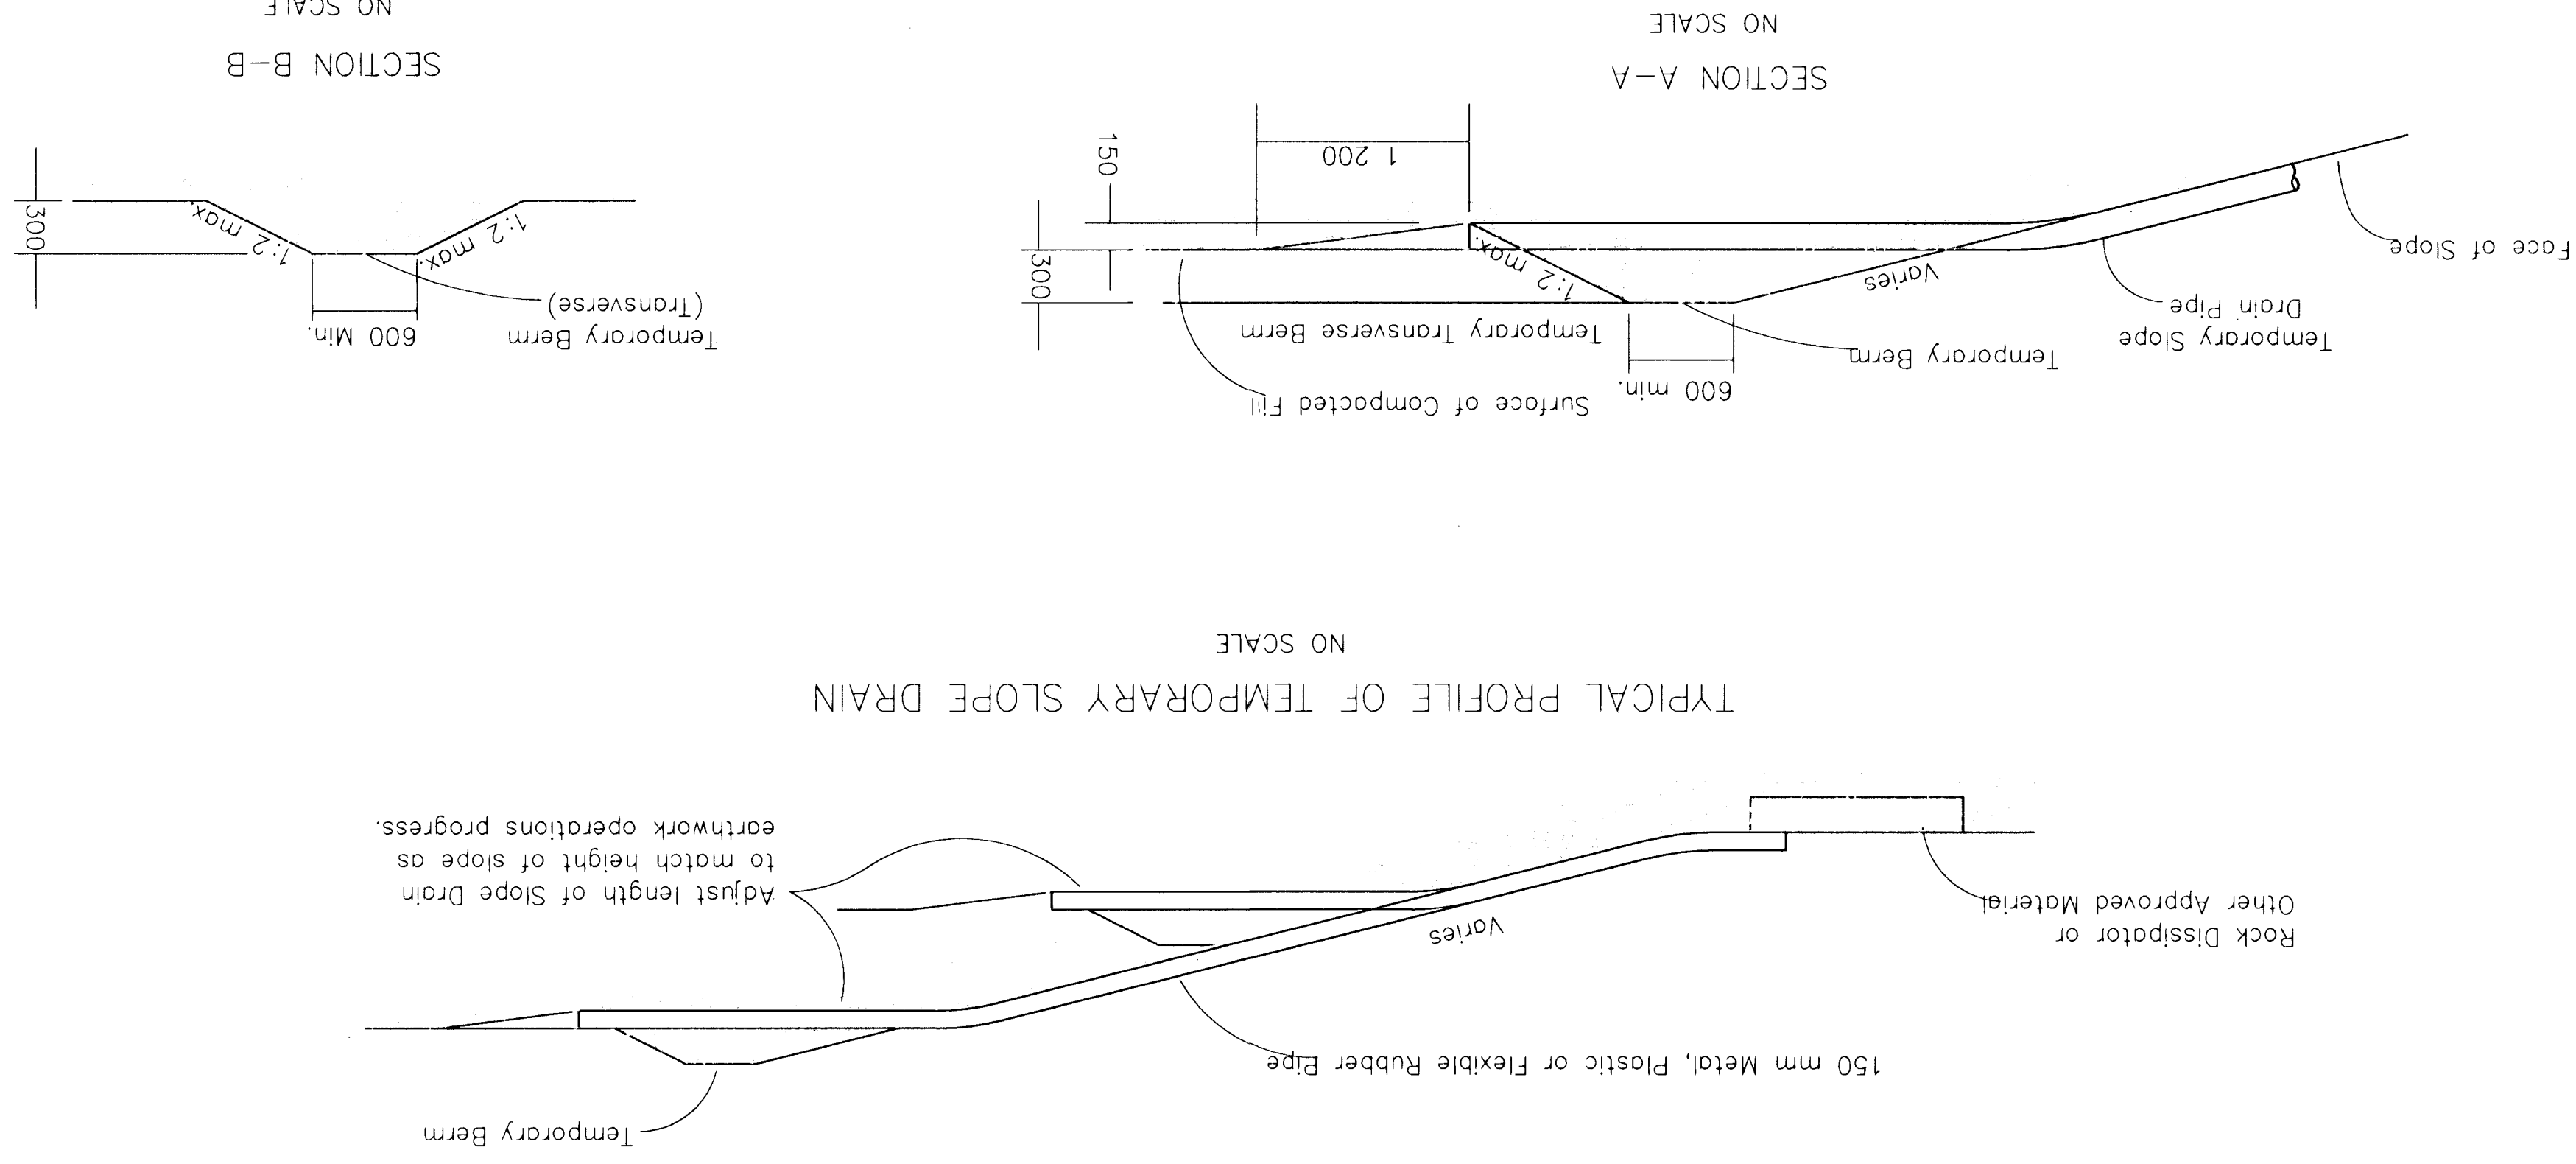

NOTE: Quantity, length and diameter of steel pipe to be determined by design flow calculations.

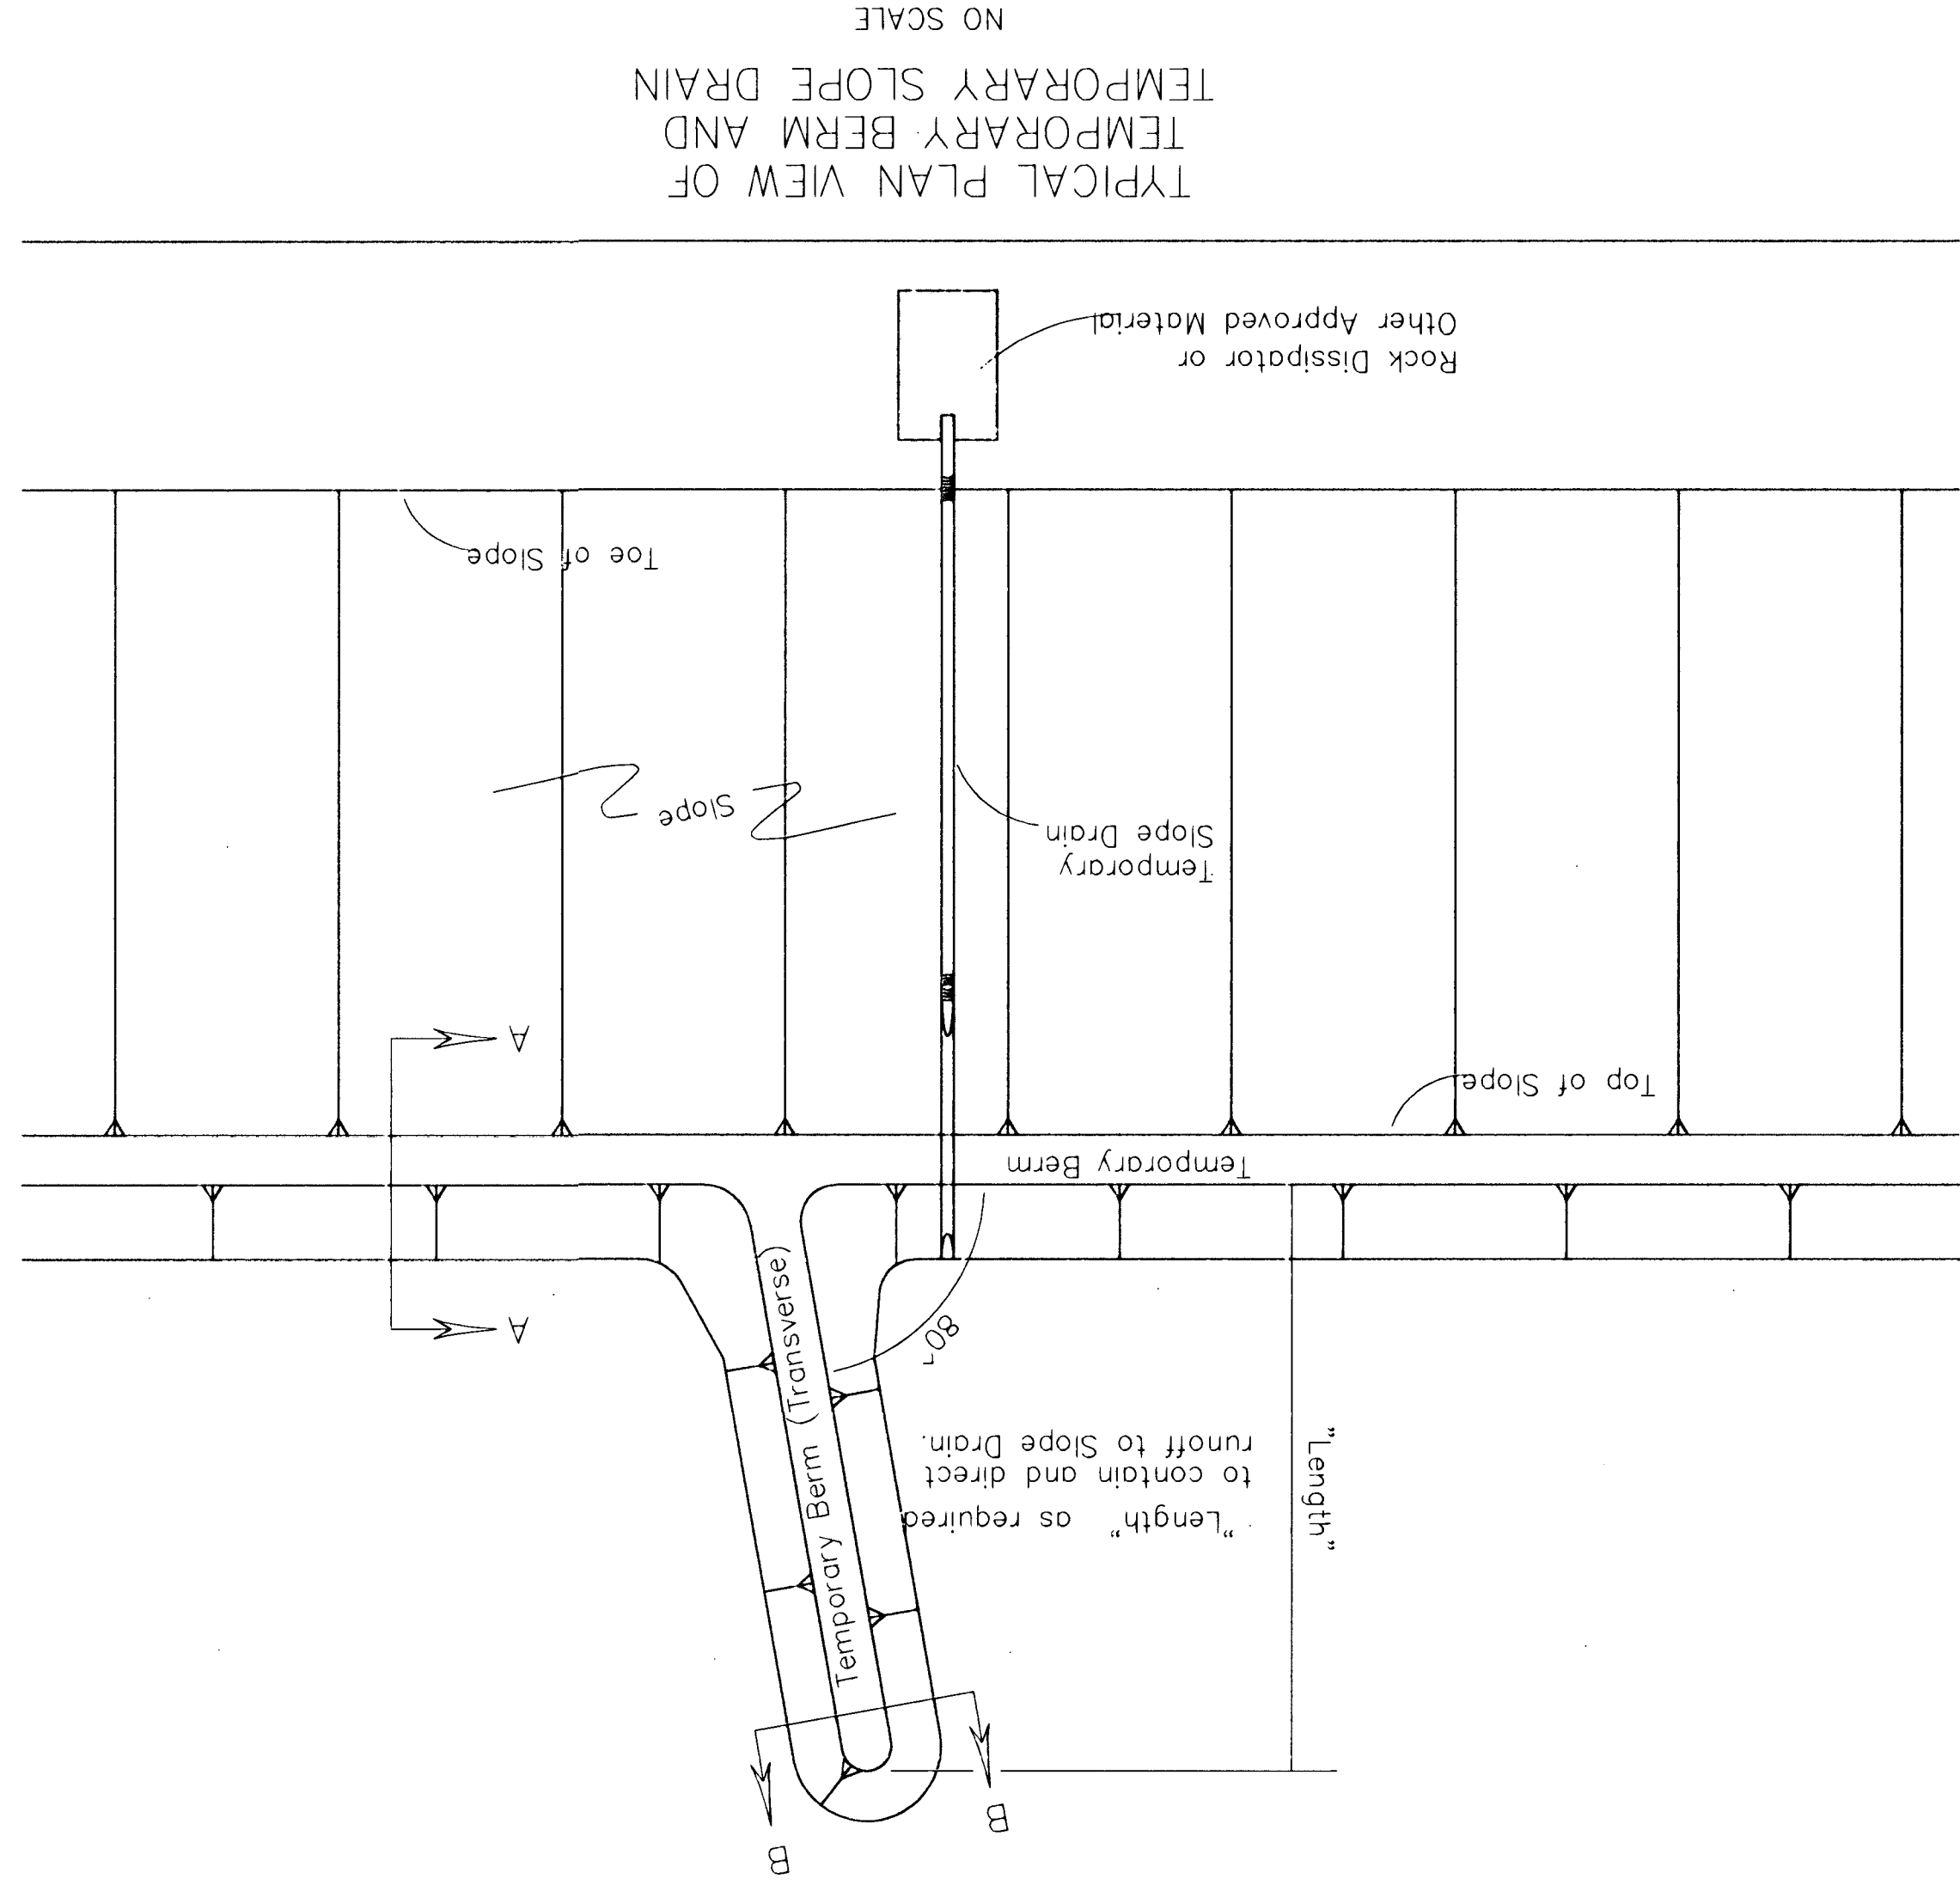

NOTES:

- 1) Temporary Slope Drain and Temporary Berm may be used on either project foreslopes or project backstopes.
- 2) Discharge of Slope Drains shall be into stabilized ditch or area, or into Sediment Basin.
- 3) Pipe shall be secured in place as approved by Engineer.

FHWA REGION NO.	STATE	PROJECT NO.	87TE-0115-01	1997	SHEET NO.	TOTAL SHEETS
7	KANSAS				45	49

NO.	DATE	REVISIONS	
1	5/10/99	Revised Standard	
2			
3			