



SIGNAL PHASING

PHASE	MIN. GREEN (SEC.)	MAX. GREEN (SEC.)	UNIT EXT. (SEC.)	YELLOW CLEARANCE (SEC.)	RED CLEARANCE (SEC.)	WALK (SEC.)	FLASHING DON'T WALK (SEC.)
2	8	80	1.0	4.0	1.5	8	26
3	8	15	1.0	3.0	1.0	8	16
4	8	80	1.0	4.0	1.5	8	16
6	8	80	1.0	4.0	1.5	8	26
7	8	15	1.0	3.0	1.0	8	16
8	8	80	1.0	4.0	1.5	8	16

ZONE	SIZE	CAMERA	PHASE CALLED
1	6.1 x 14.2	V1	6
2	6.1 x 14.2	V2	4
3	3.0 x 14.2	V2	7
4	6.1 x 14.2	V3	2
5	6.1 x 14.2	V4	8
6	3.0 x 14.2	V4	3
7	6.9 x 7.1	V6	4
8	6.7 x 7.1	V5	8

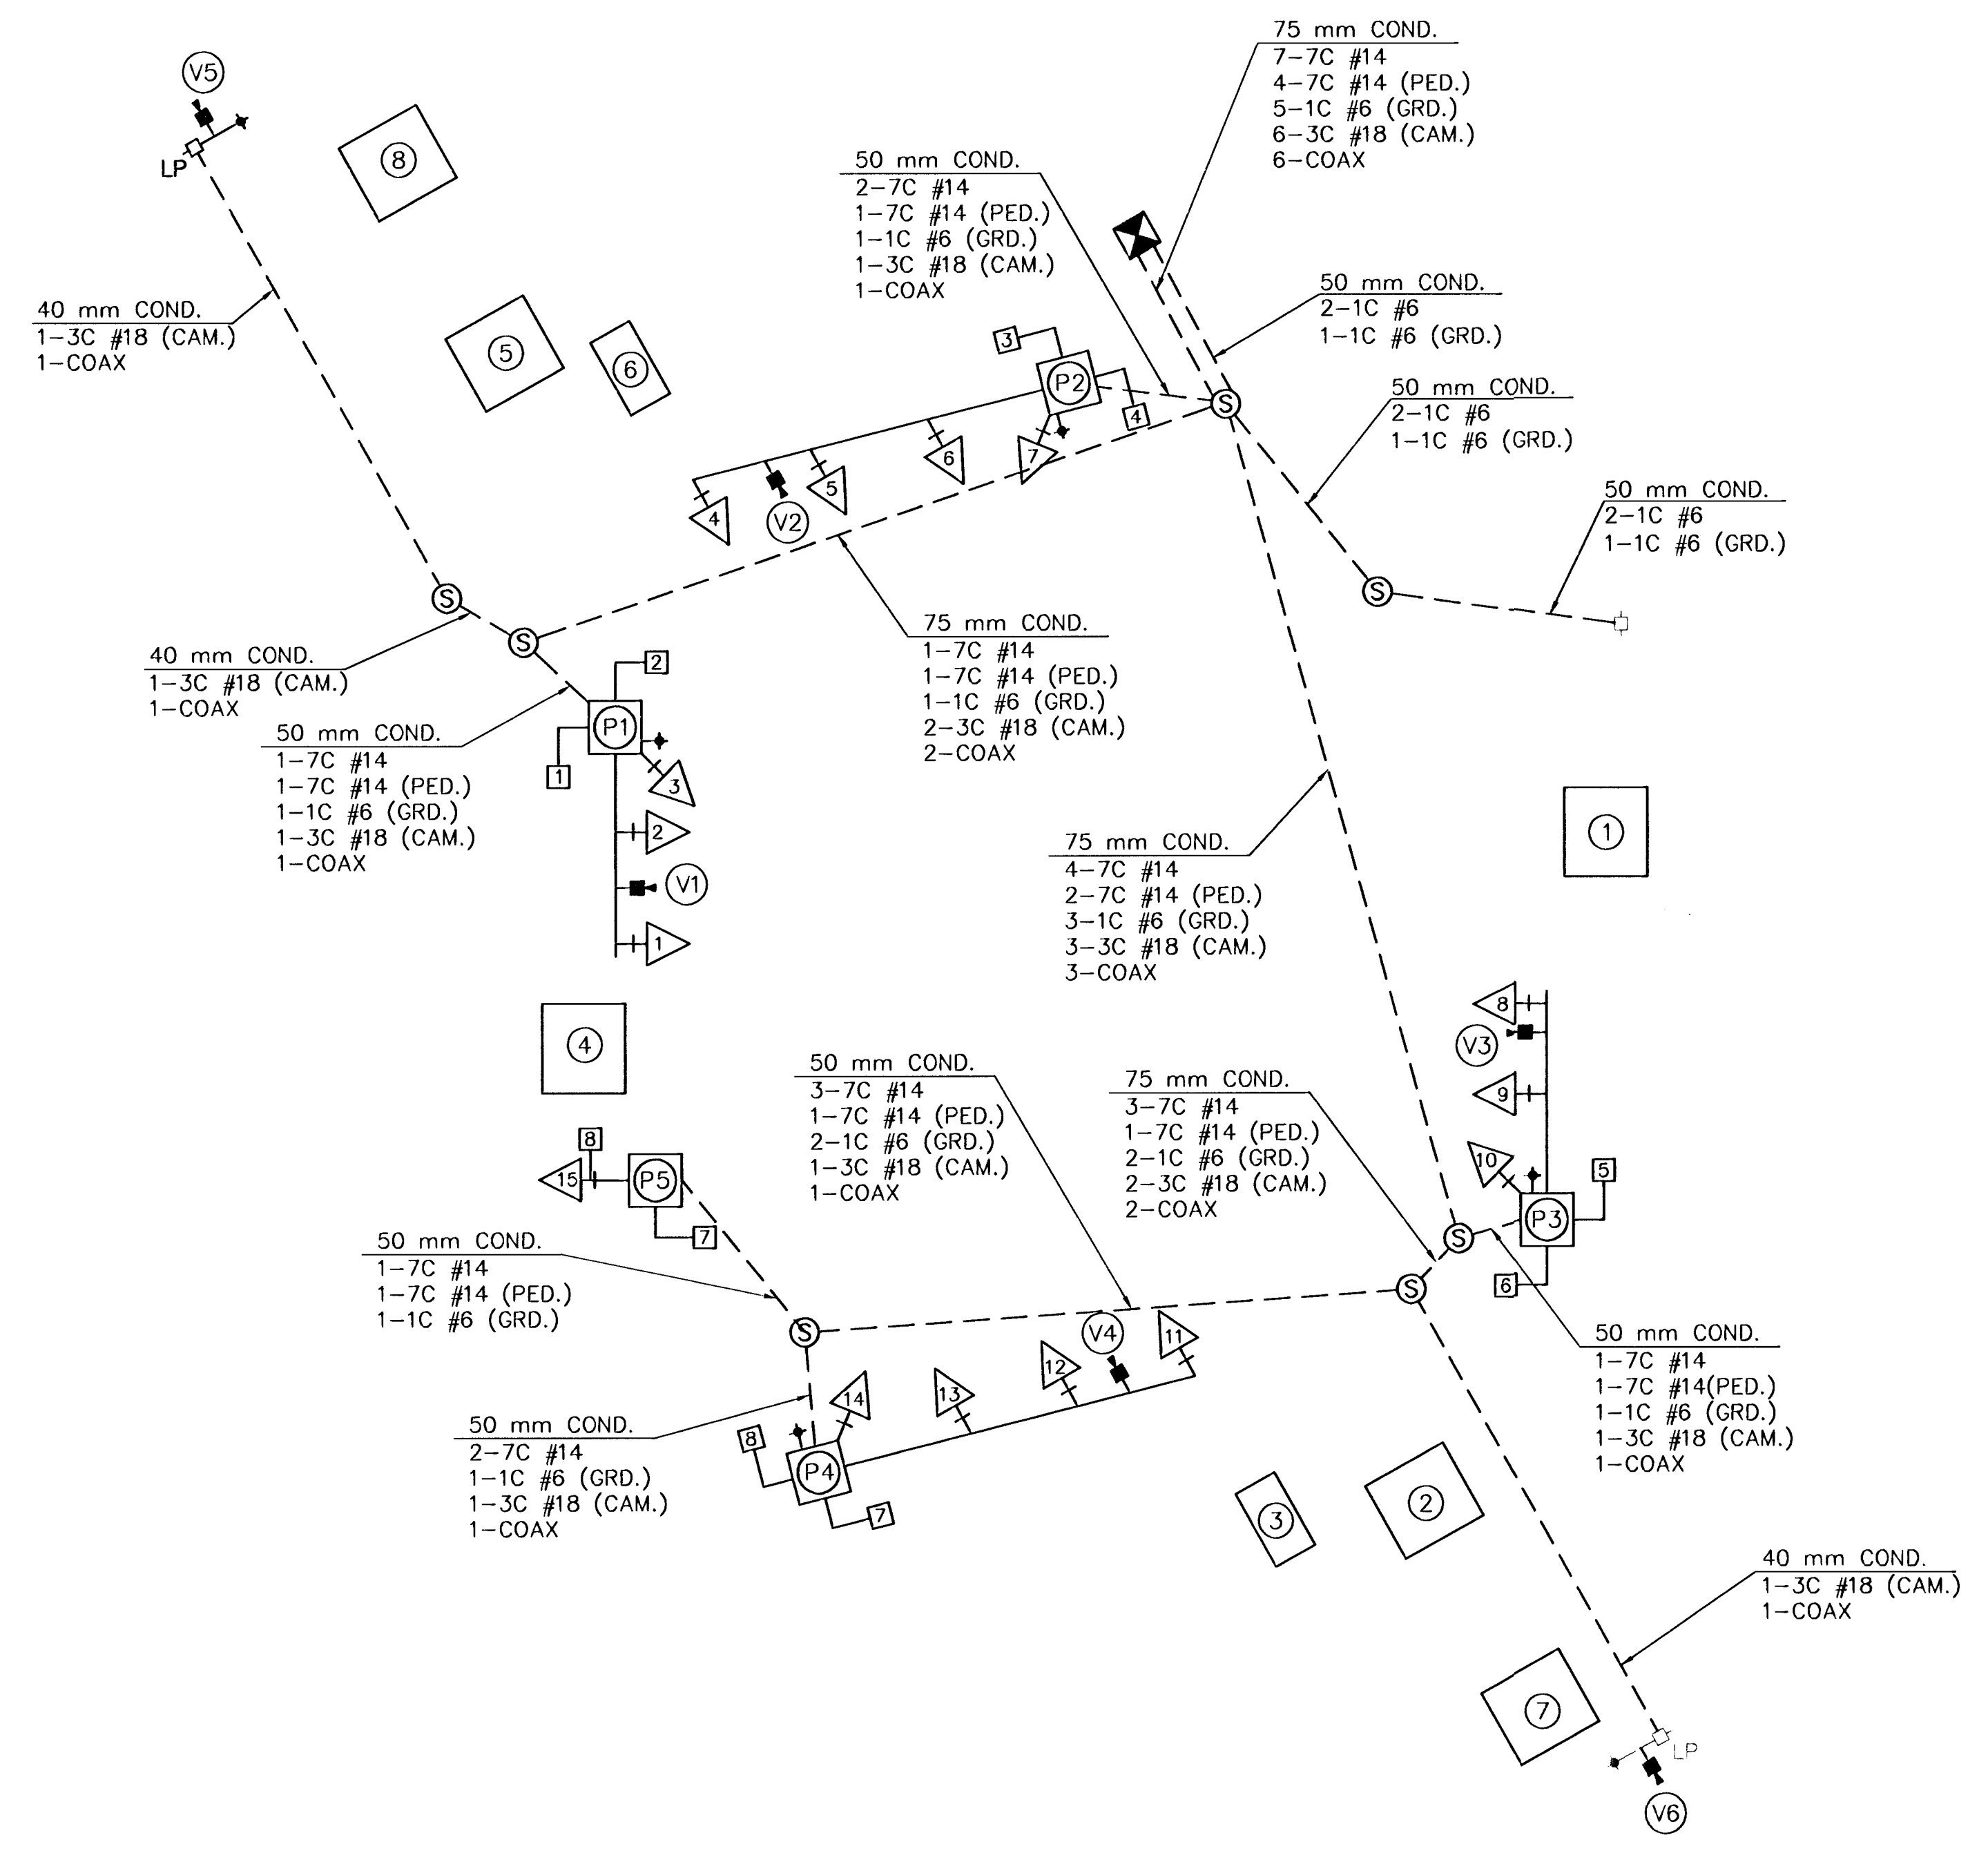

- LEGEND
- (P2) TRAFFIC SIGNAL POLE W/ DESIGNATION NUMBER
 - ← TRAFFIC SIGNAL HEAD
 - (K) W-DW PEDESTRIAN SIGNAL AND PUSHBUTTON
 - CONTROLLER
 - ⊙ SERVICE BOX
 - DETECTION ZONE
 - ◆ LUMINAIRE
 - MOUNTED VIDEO DETECTION CAMERA
 - (V2) MOUNTED VIDEO DETECTION CAMERA DESIGNATION NUMBER

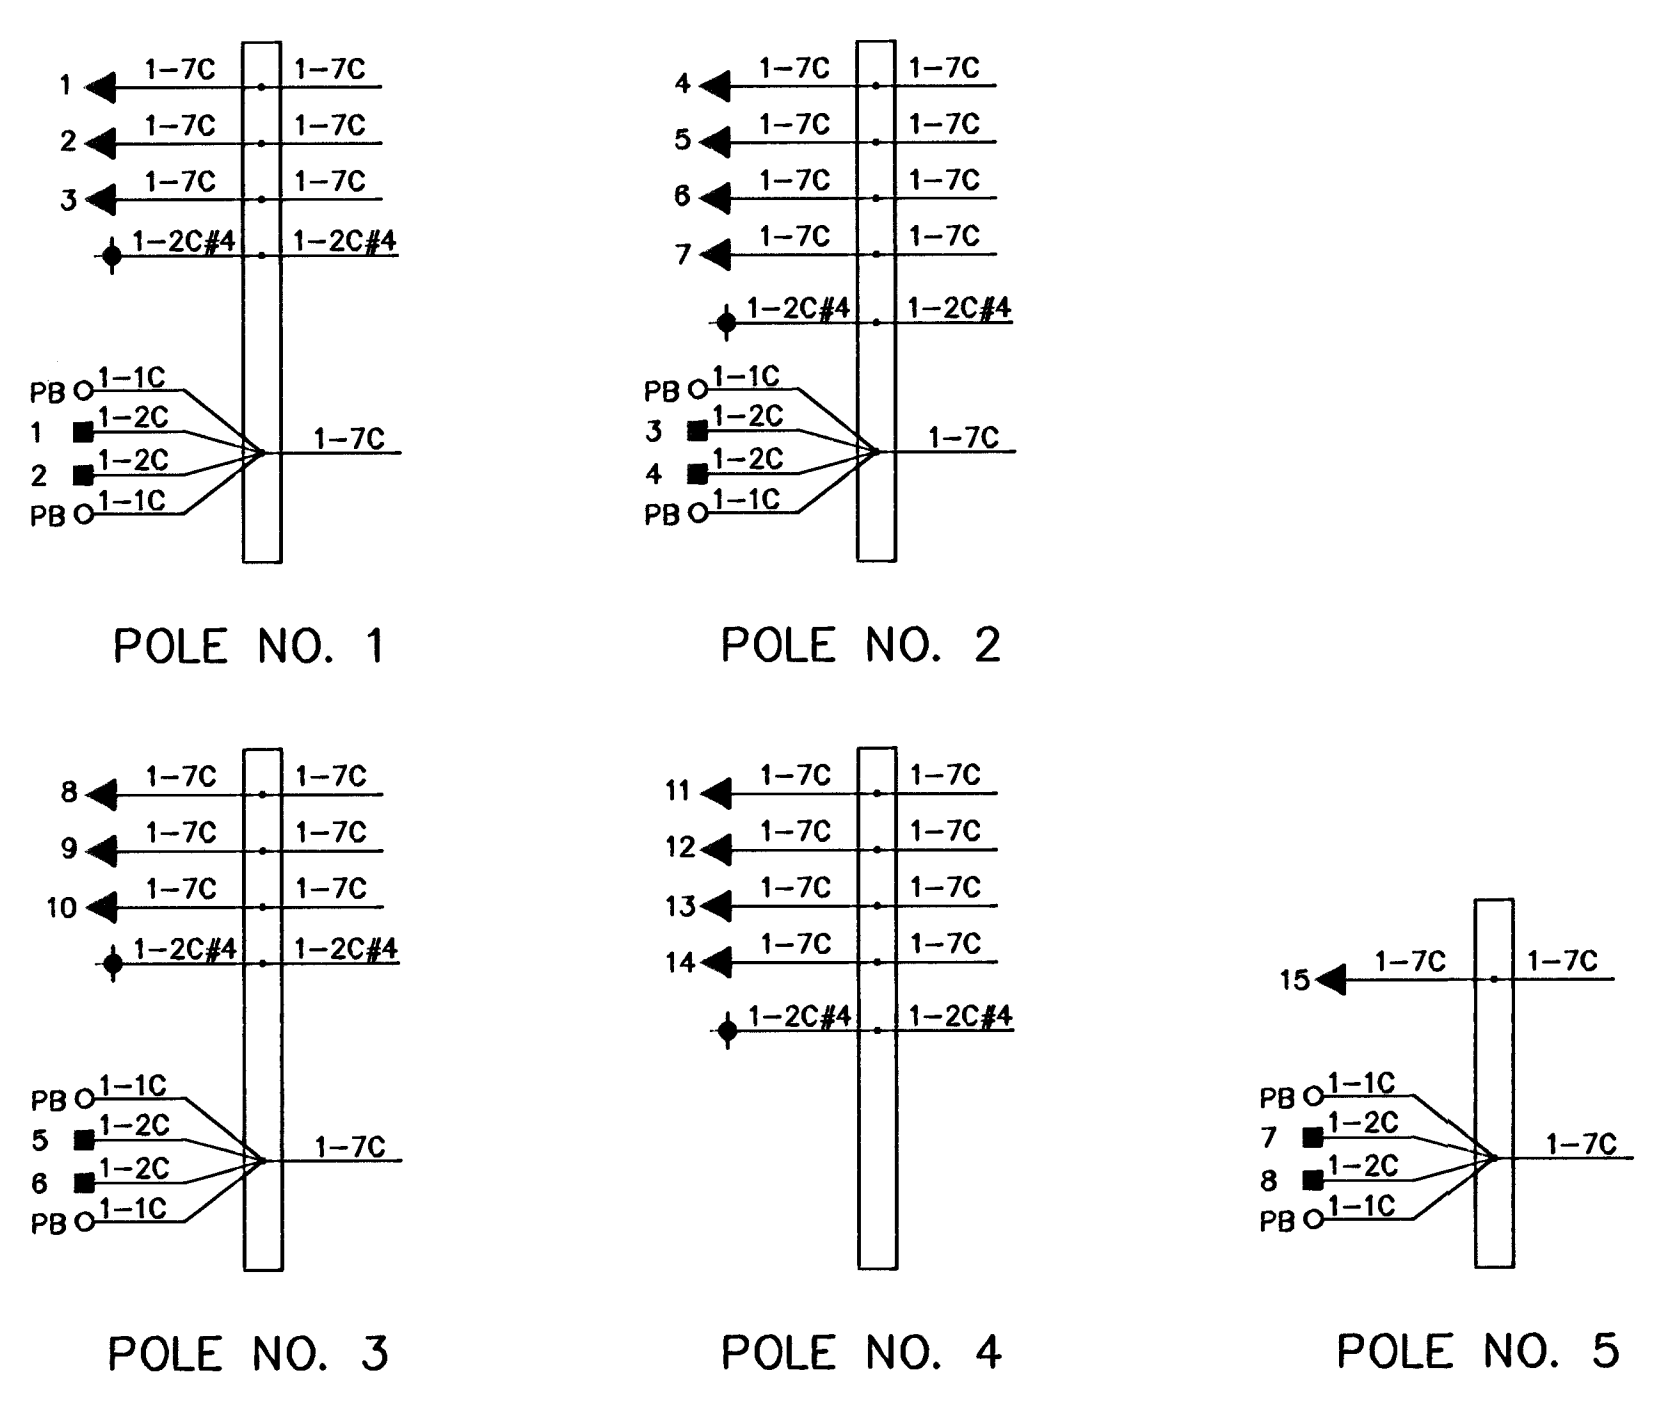

TRAFFIC SIGNAL WIRING & PHASING DIAGRAM	
<p>KAW VALLEY ENGINEERING ENGINEERS AND LAND SURVEYORS 2319 NORTH JACKSON P.O. BOX 1304 JUNCTION CITY, KANSAS 66441 (785)762-5040 FAX (785)762-7744 E-MAIL jc@kveeng.com</p>	PROJ. NO. A02232
	DATE 4-25-02
	DESIGNER CDM/SDM
	DRAWN BY JT
	CHECKED BY
	CFN 2232TSDW
	SHEET 30 OF 59

Plotted By : J. TRUMPP
 Plot File : 2232TSDW
 Server File :
 Server :
 Plot Date : 4-25-02
 View =