


Subdivision Bench Marks				
No.	Street and Station	From CL	Description	Elevation
3	Spyglass, Sta. 14+92	17.50' Rt	Top of E curb of Spyglass S end of E return Blade	

Curve #4					
Curve Data Based on Centerline					
Rad. = 100' Delta = 27° 12' 05" Tangent = 24.19'					
Arc = 47.47' L.C. = 47.03' Def/Ft. = 17.19068 Min.					
Station	Arc	FACE CHORD LENGTHS	Defl.	T. Defl.	
		8 Lt.	8 Rt.		
14+30.77	-	-	-	0°00'00"	0°00'00"
14+50.00	19.23'	24.00'	14.40'	5°30'34"	5°30'34"
14+75.00	25.00'	31.17'	18.70'	7°09'46"	12°40'20"
14+78.24	3.24'	0.00'	0.00'	0°55'42"	13°36'02"

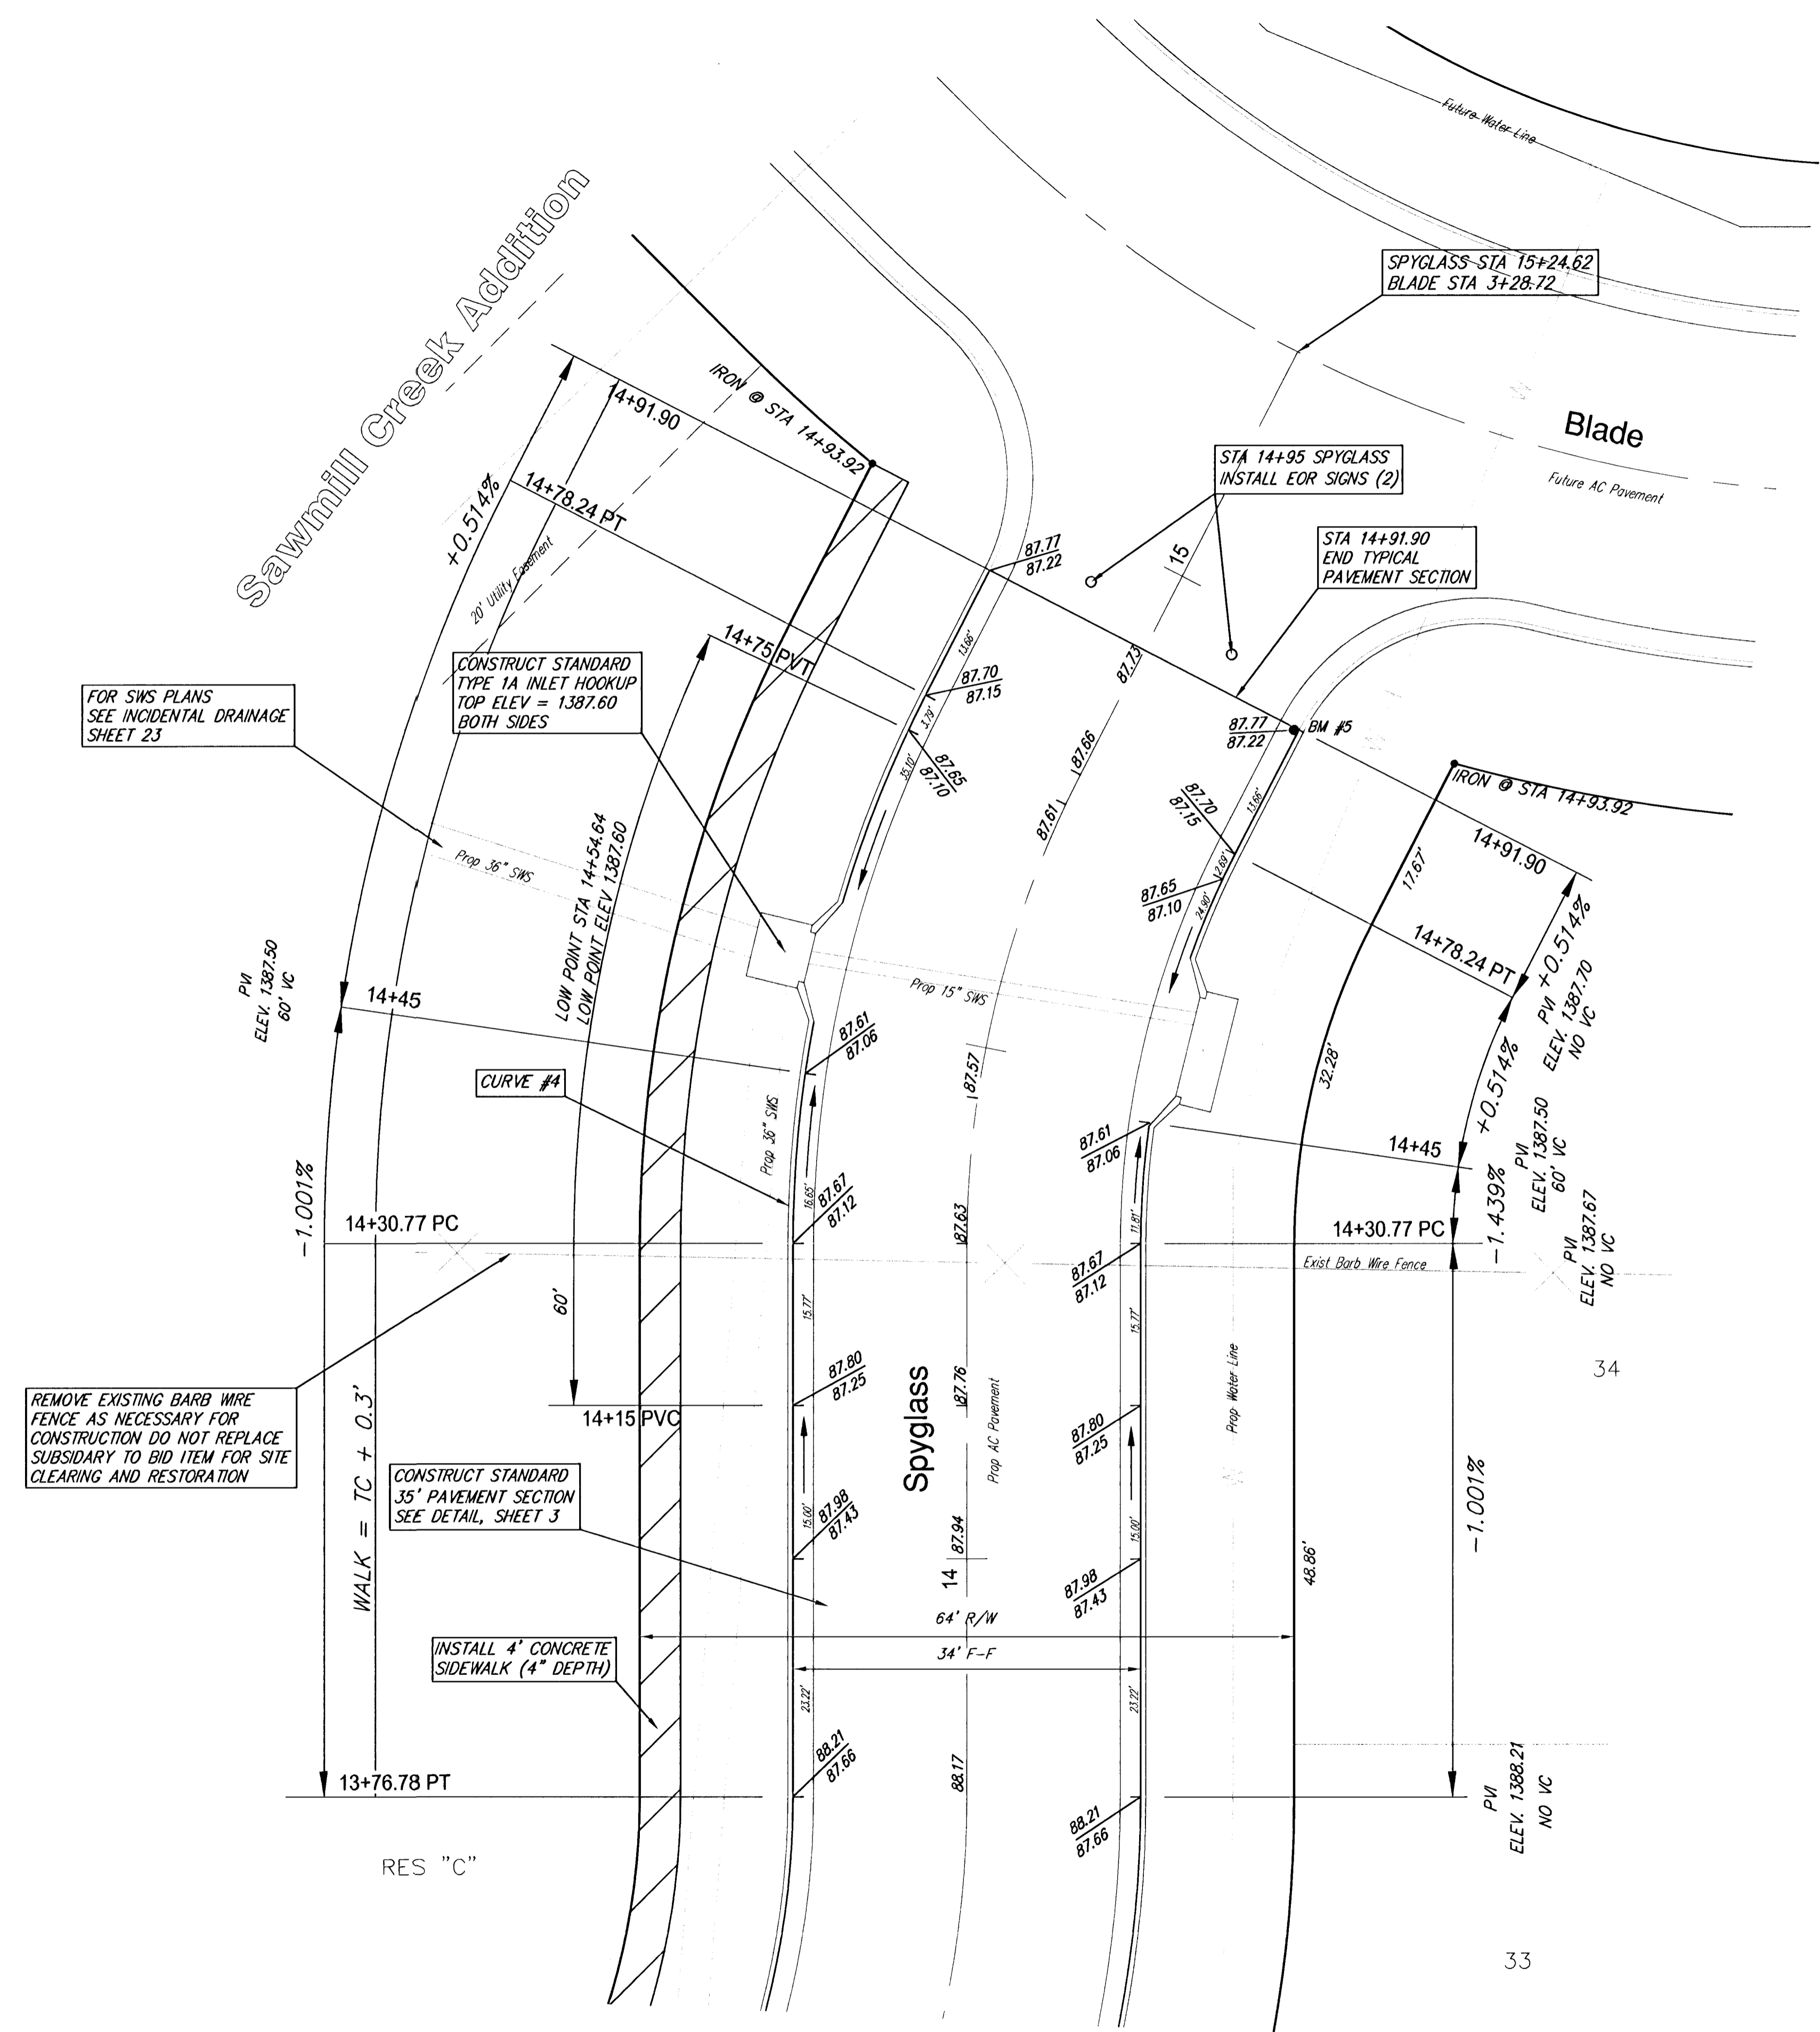

FOR SWS PLANS
SEE INCIDENTAL DRAINAGE
SHEET 23

CONSTRUCT STANDARD
TYPE 1A INLET HOOKUP
TOP ELEV = 1387.60
BOTH SIDES


REMOVE EXISTING BARB WIRE
FENCE AS NECESSARY FOR
CONSTRUCTION DO NOT REPLACE
SUBSIDIARY TO BID ITEM FOR SITE
CLEARING AND RESTORATION

CONSTRUCT STANDARD
35' PAVEMENT SECTION
SEE DETAIL, SHEET 3

INSTALL 4" CONCRETE
SIDEWALK (4" DEPTH)

NOTE: ROLL TYPE CURB AND
GUTTER TO BE CONSTRUCTED ALONG
PAVEMENT DEPICTED ON THIS SHEET

**SAWMILL CREEK ADDITION
SPYGLASS
WICHITA, KANSAS**

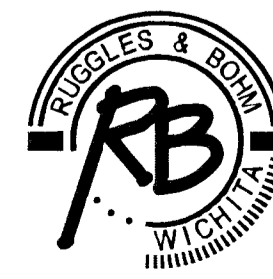

Ruggles & Bohm, P.A.
Engineering, Surveying, Land Planning

924 North Main
Wichita, Kansas 67203
www.rbkansas.com

(316) 264-8008
(316) 264-4621 fax
E-mail: info@rbkansas.com

DRAWING FILE Paving {Spyglass 01}	PROJECT NUMBER 472-83624	DATE Nov. 26, 2002
--------------------------------------	-----------------------------	-----------------------

DESIGN
CMB

DRAWN
EJG

REVIEW
UTILITY

SHEET
8
OF
AD