



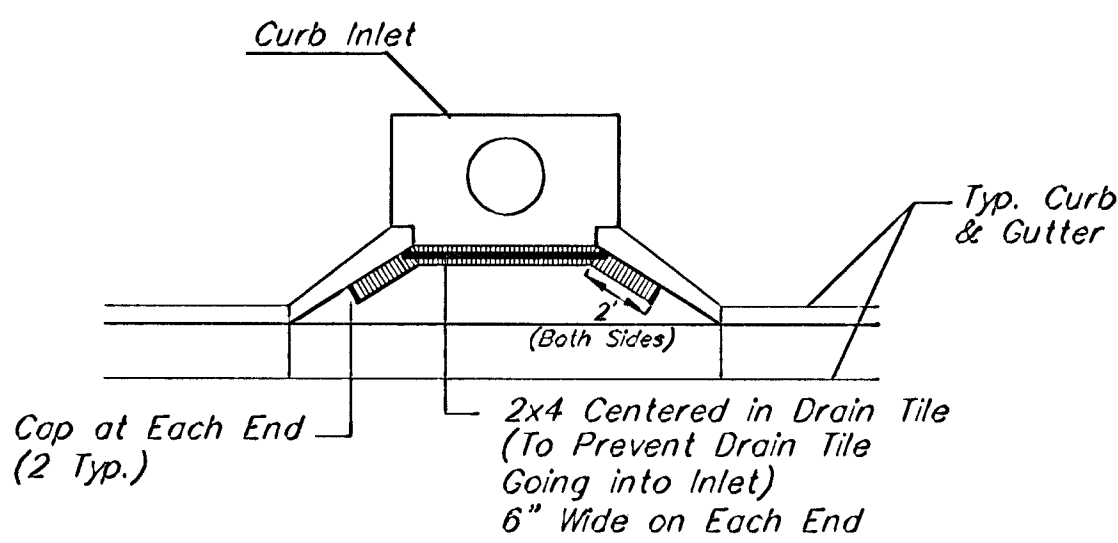

Note:
Place 4" perforated PVC pipe filled w/ 1/2"-1" Dia. gravel. Place pipe in front of Curb Inlet as Shown.

2x4 LENGTH	INLET TYPE	INLET OPENING
5'-6"	1-A	5'-0"
10'-6"	1-A	10'-0"
15'-6"	1-A	15'-0"

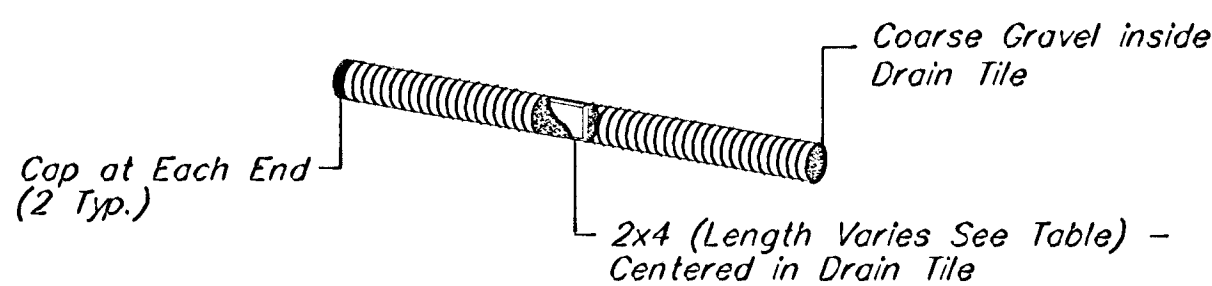


CURB INLET PROTECTION

4" Perforated Pipe w/ Gravel

Existing Paved Roadway

Sediment Barrier (Straw Bale type shown)

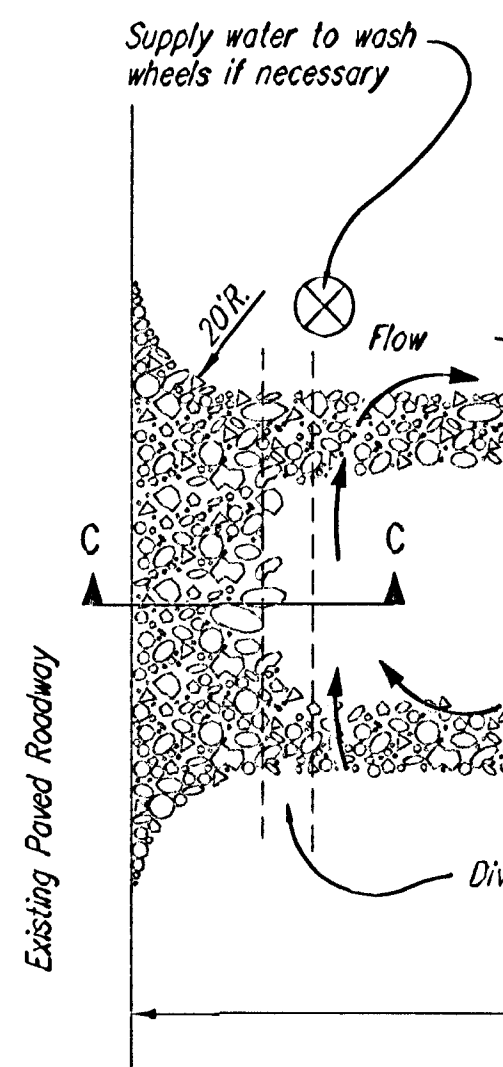

NOTES:

1. THE ENTRANCE SHALL PREVENT THE FLOWING OF SEDIMENT INTO THE DRAINAGE SYSTEM. REPAIR AND/OR CLEAN AS NECESSARY.
2. WHEN NECESSARY, WHEN THE ENTRANCE IS NOT SUFFICIENT TO PREVENT SEDIMENT FROM ENTERING THE DRAINAGE SYSTEM, A SEDIMENT BARRIER SHALL BE INSTALLED.
3. WHEN WASHING IS REQUIRED, THE WATER SHALL BE SUPPLIED TO THE WHEELS OF THE VEHICLE ENTERING THE DRAINAGE SYSTEM.
4. DRIVE ENTRANCES ON DRIVEWAYS SHALL BE PROTECTED BY A SEDIMENT BARRIER SHOWN, BUT NOT NECESSARY TO KEEP THE ENTRANCE FROM EXTENDING FROM BACK OF THE DRIVEWAY.