



STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
KANSAS	87 N-0203-01	2003	23	48

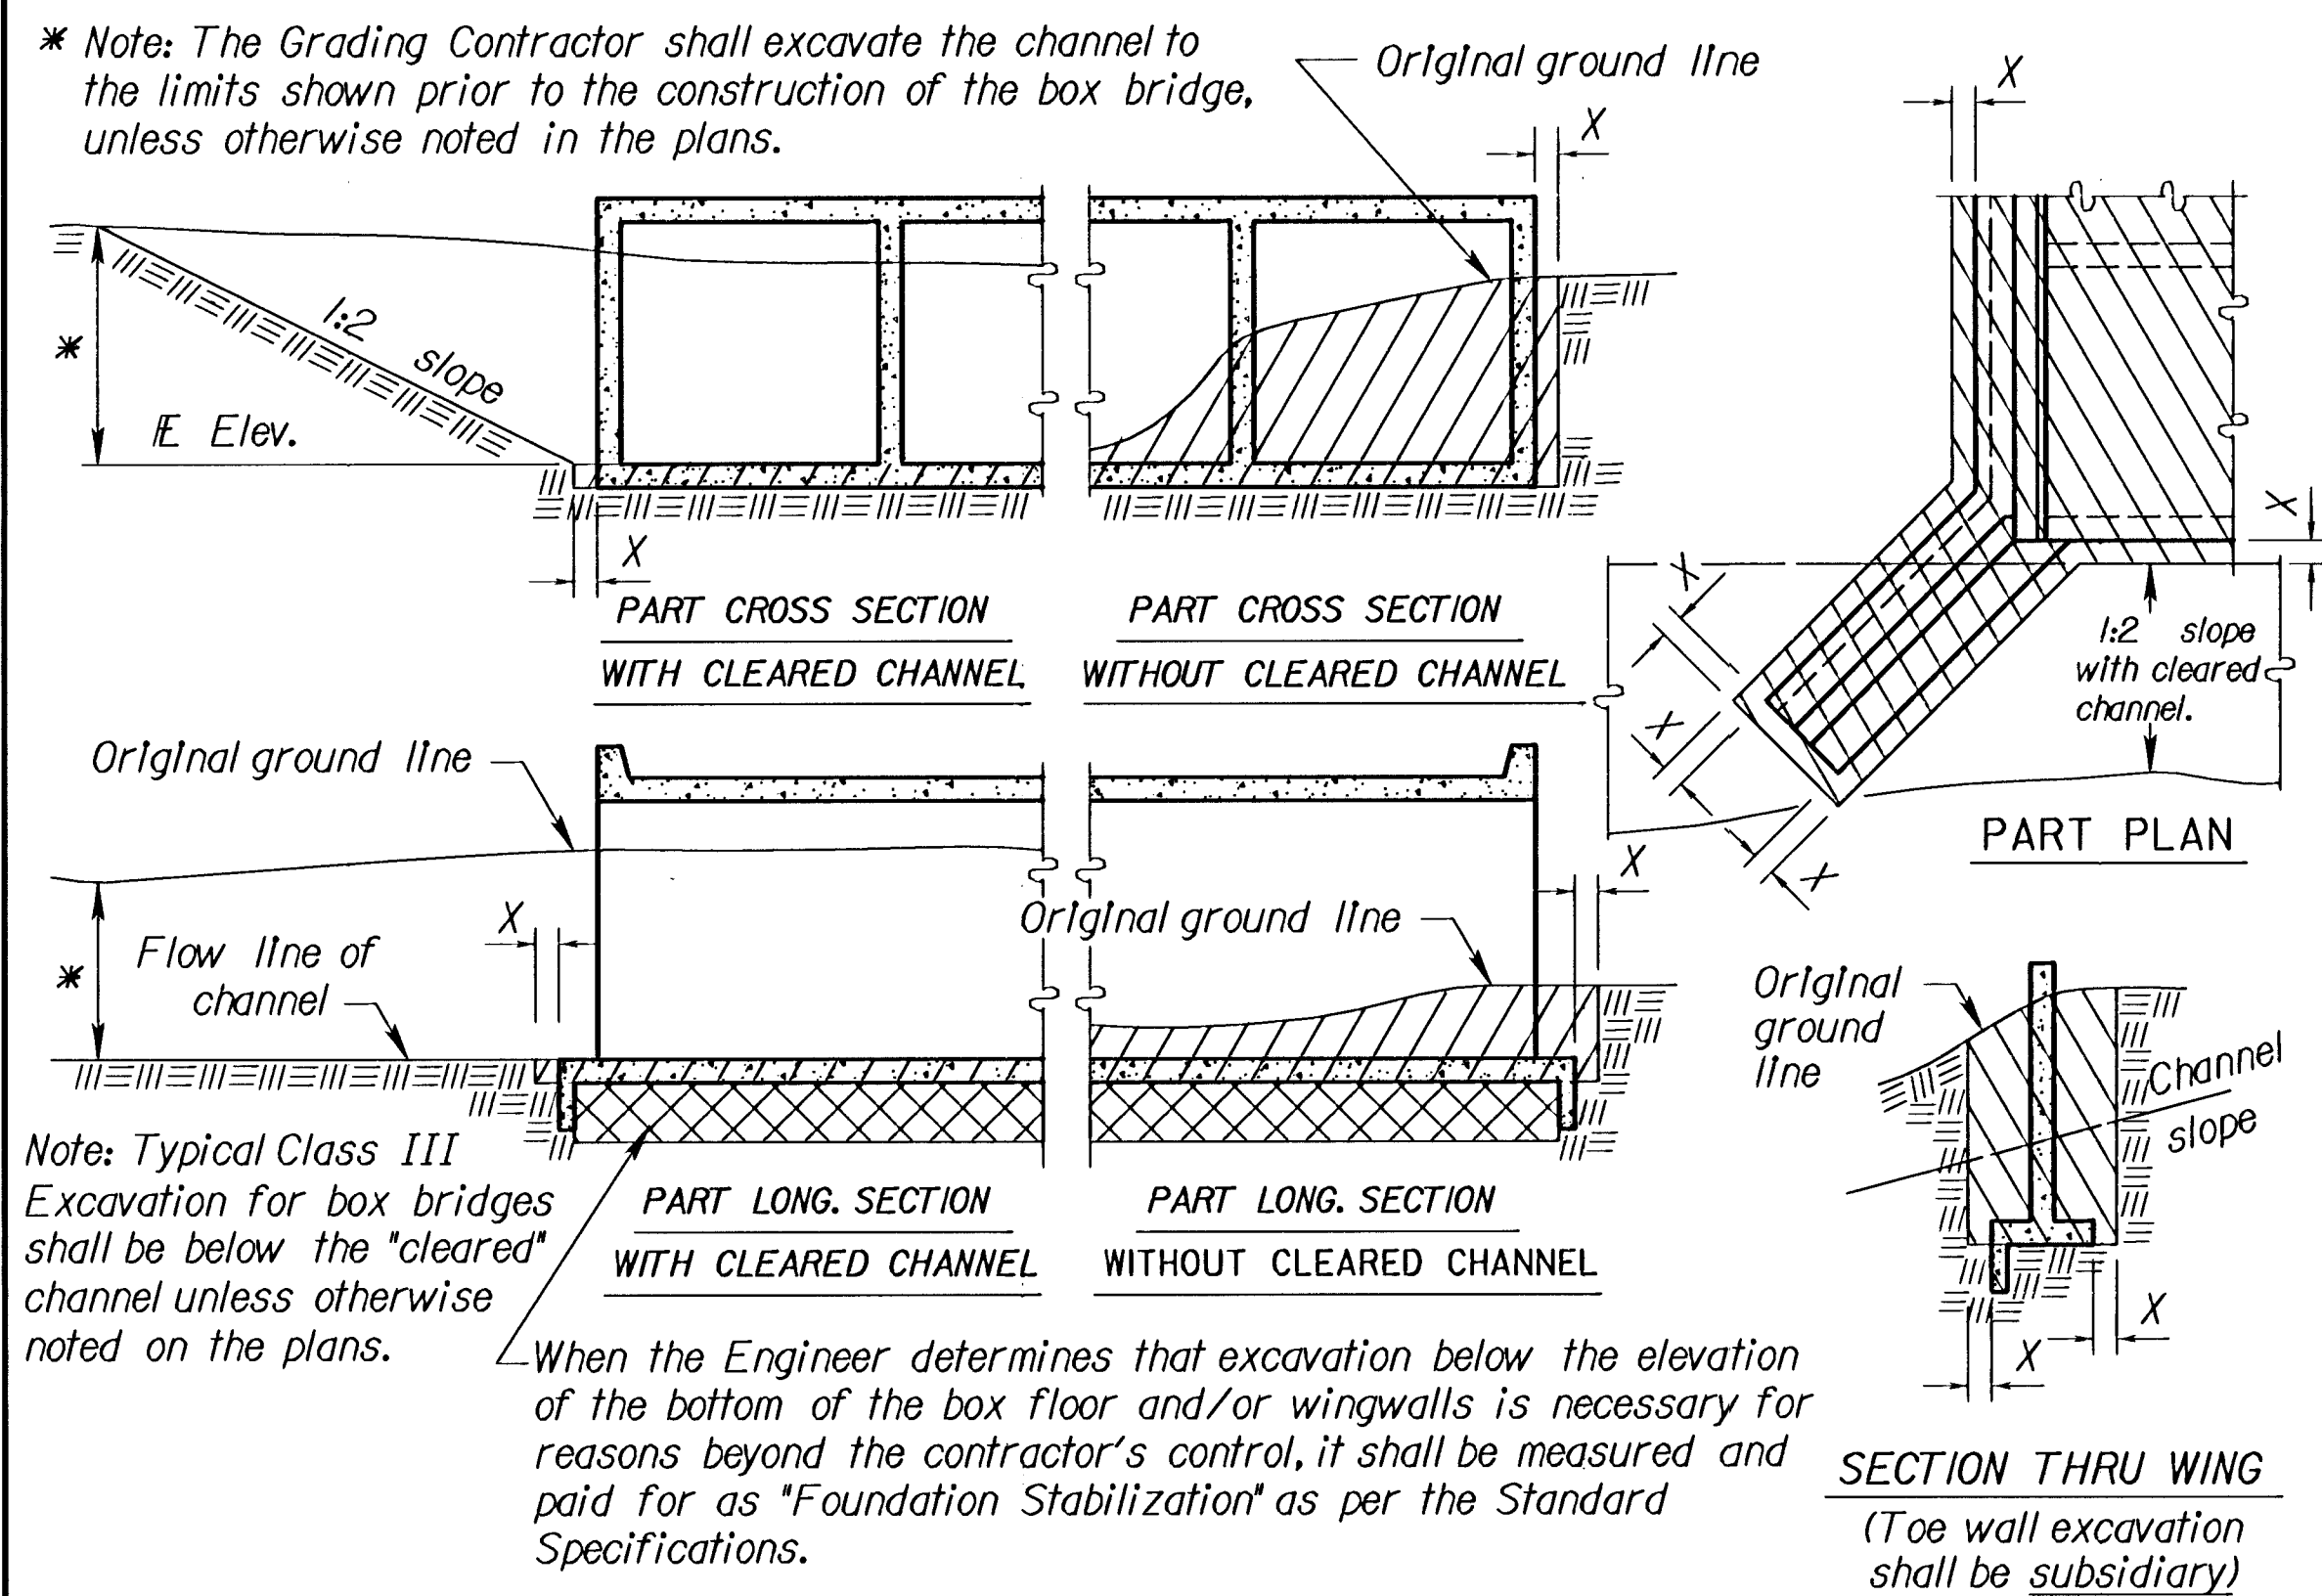


EXCAVATION DETAILS FOR REINFORCED CONCRETE BOX CULVERT

Note: Excavation for culverts less than bridge length shall not be paid for as Class III Excavation but shall be subsidiary to Grade 28 Concrete.

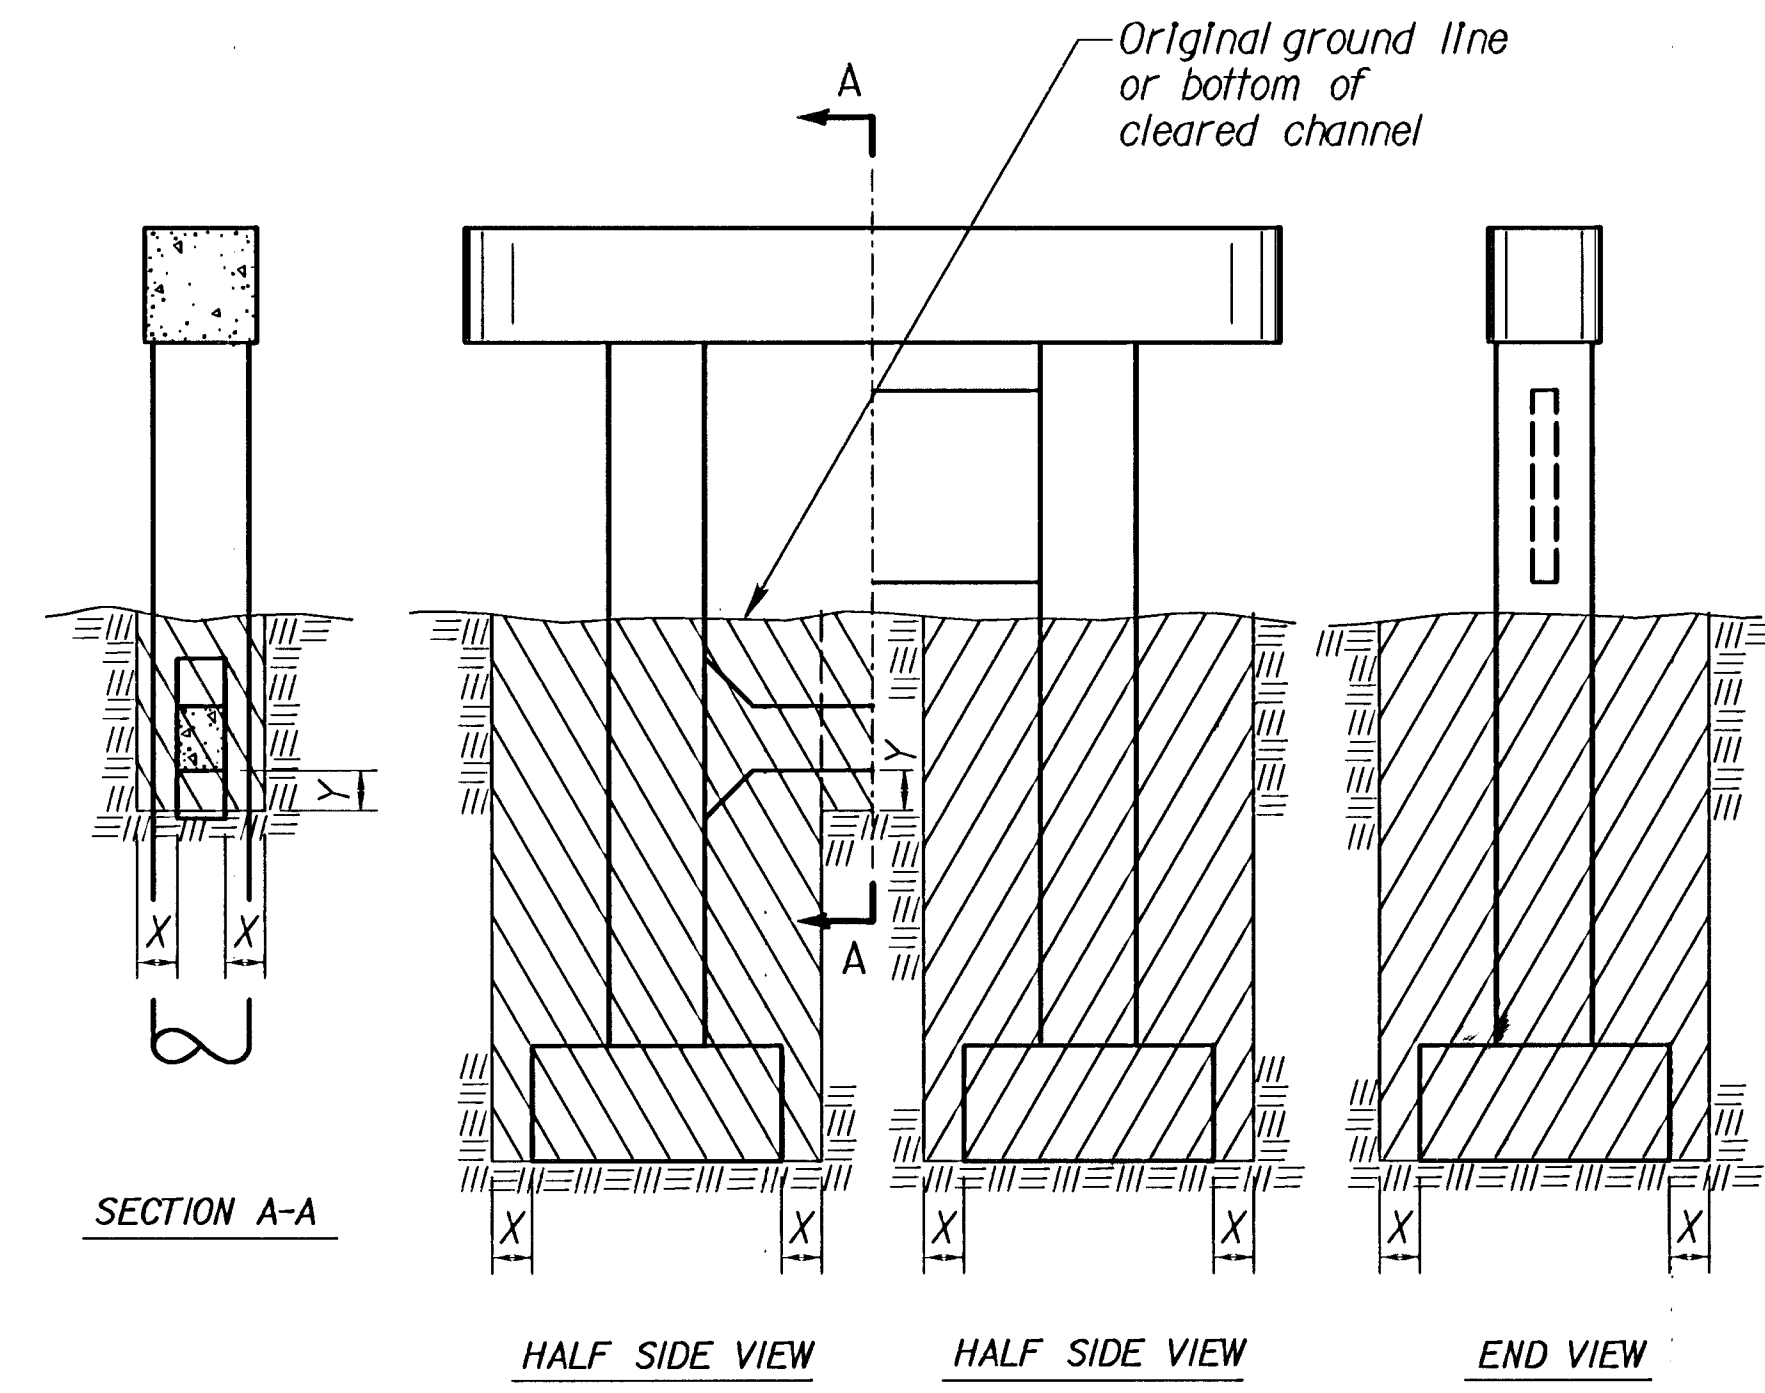


EXCAVATION DETAILS FOR TYPICAL PIERS

See detail when rock or shale (rock) is encountered.*

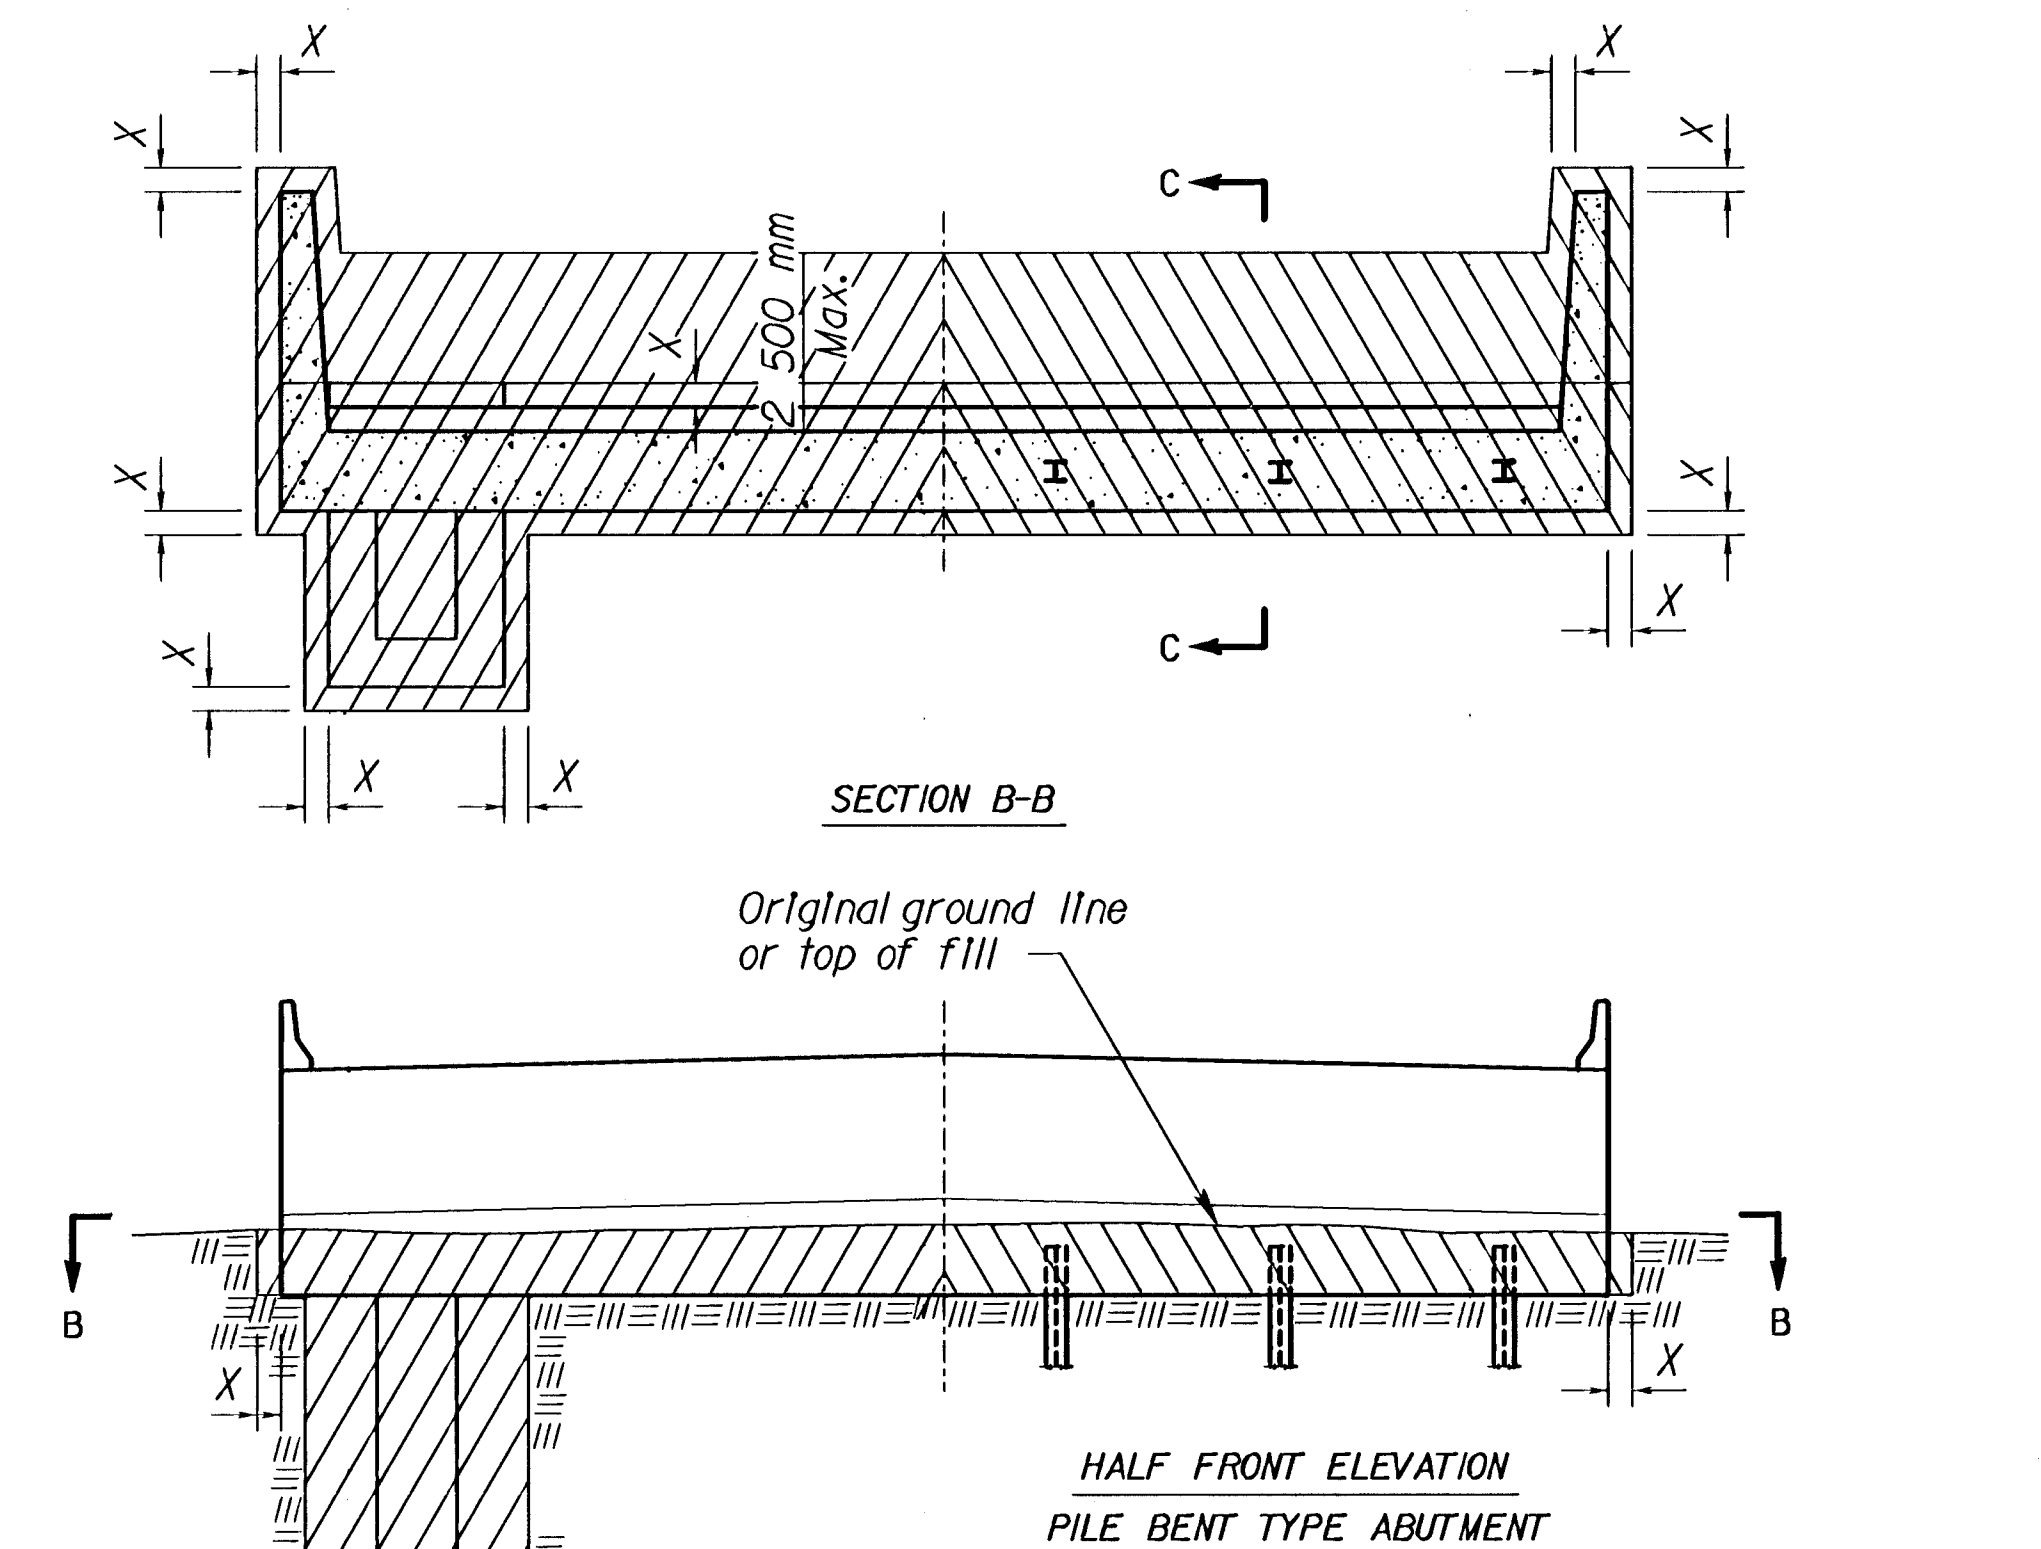

EXCAVATION DETAILS FOR TYPICAL ABUTMENTS

See detail when rock or shale (rock) is encountered.*



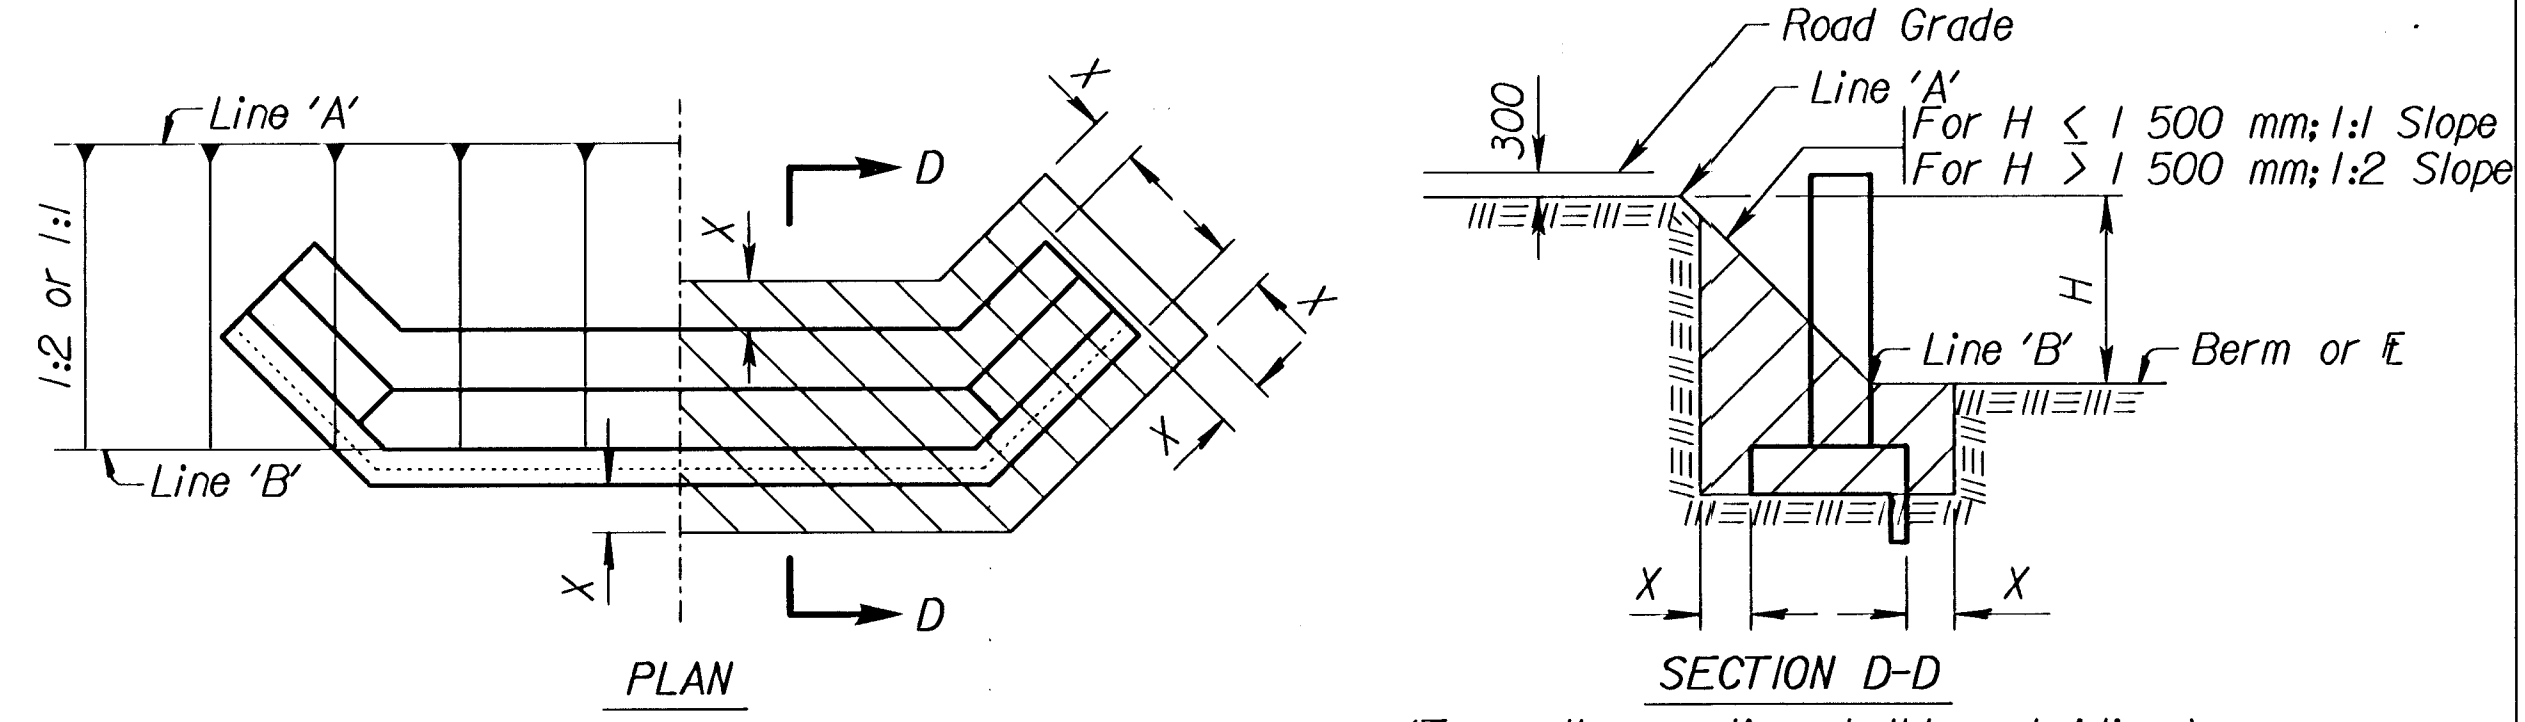


EXCAVATION DETAILS FOR ABUTMENTS WITH FLARED WINGWALLS


Note: Class II Excavation includes the entire volume of whatever nature found below the "Excavation Boundary Plane", within the limits specified for measurement. This may include water or air.

CLASS II EXCAVATION QUANTITIES


See detail when rock or shale (rock) is encountered.*

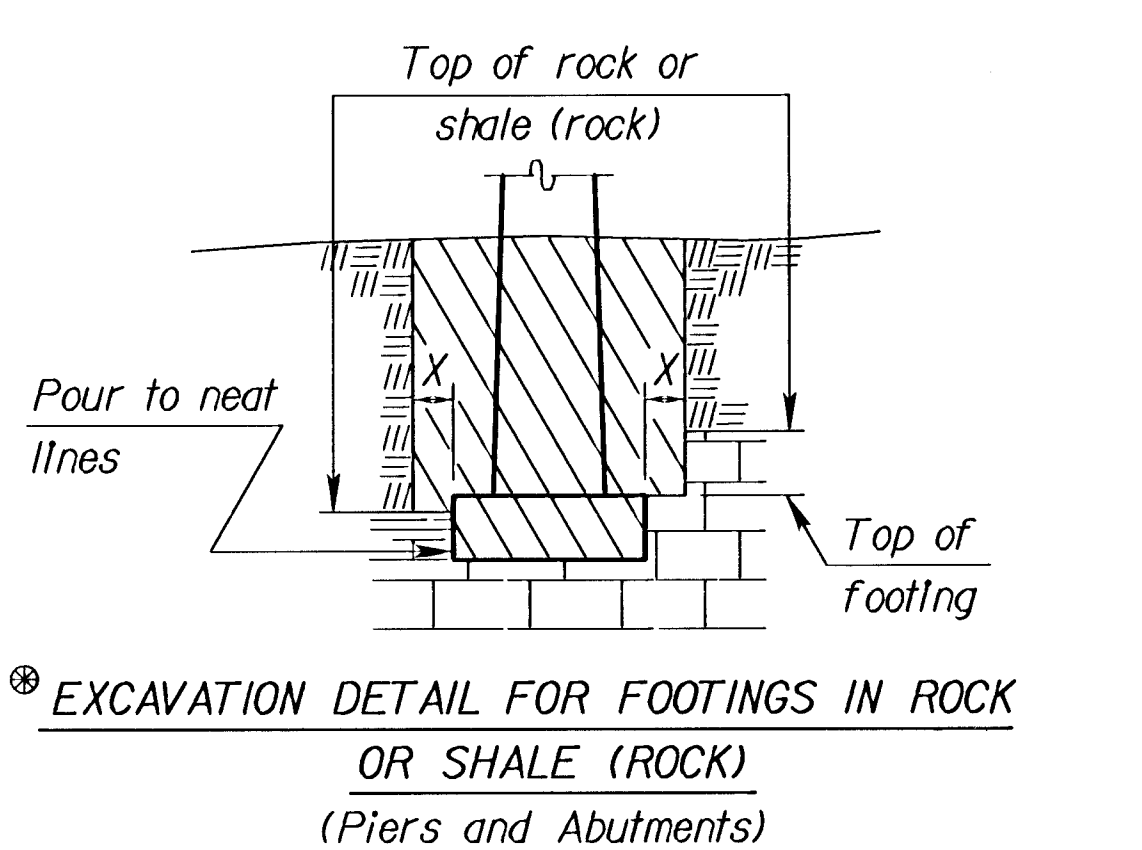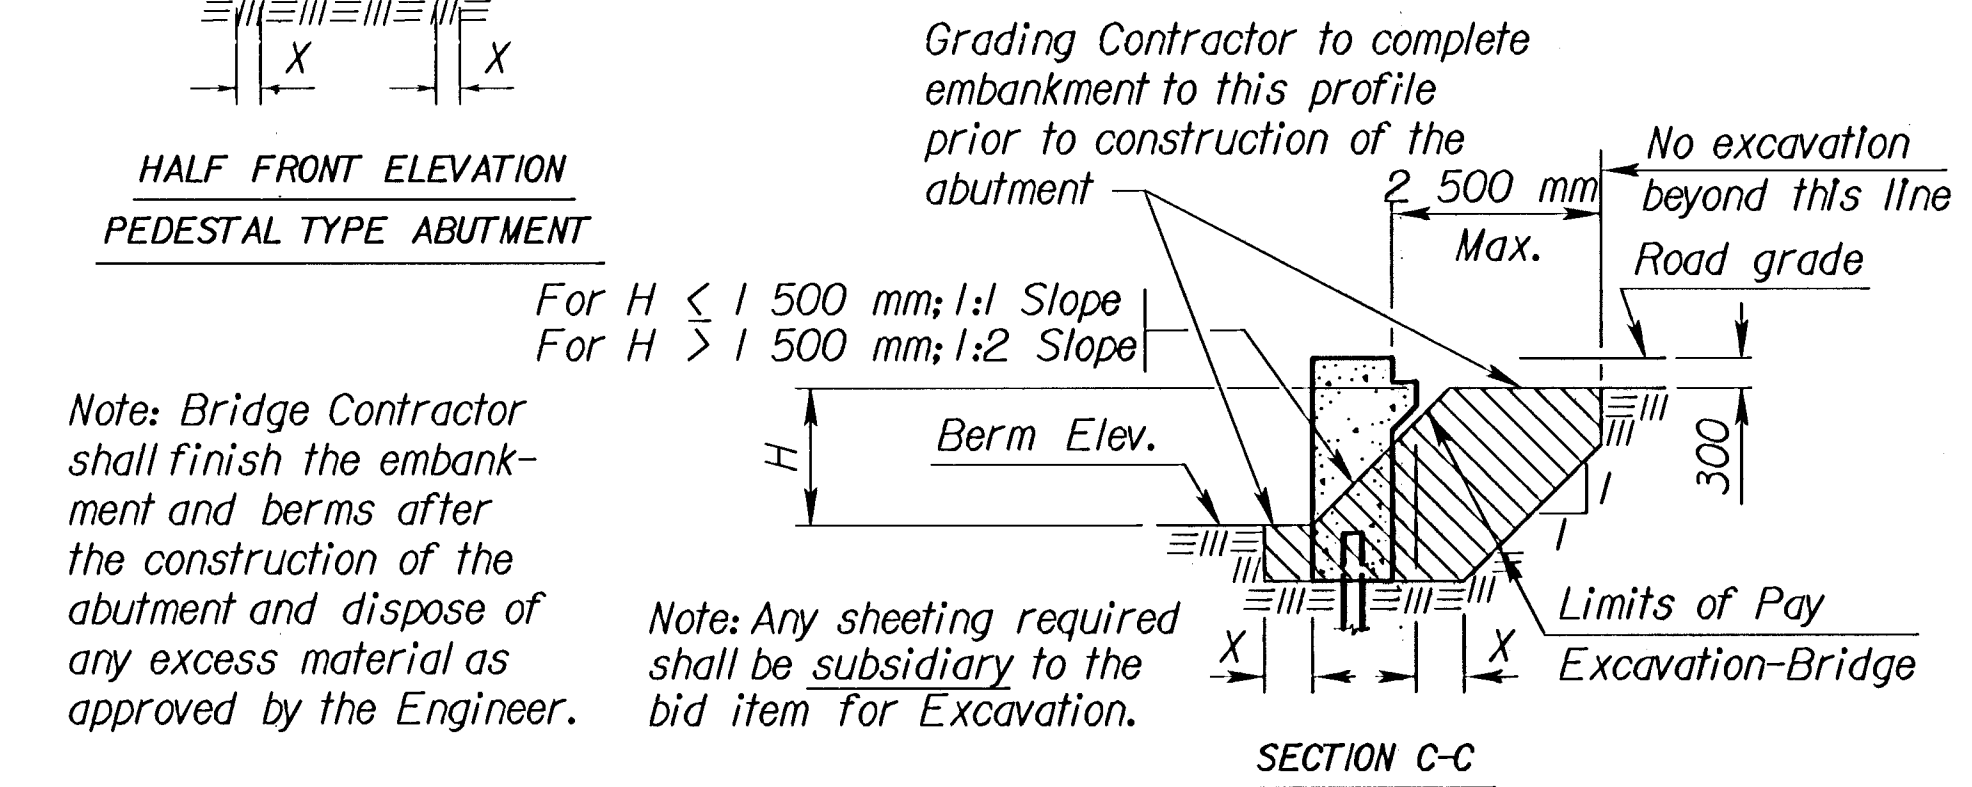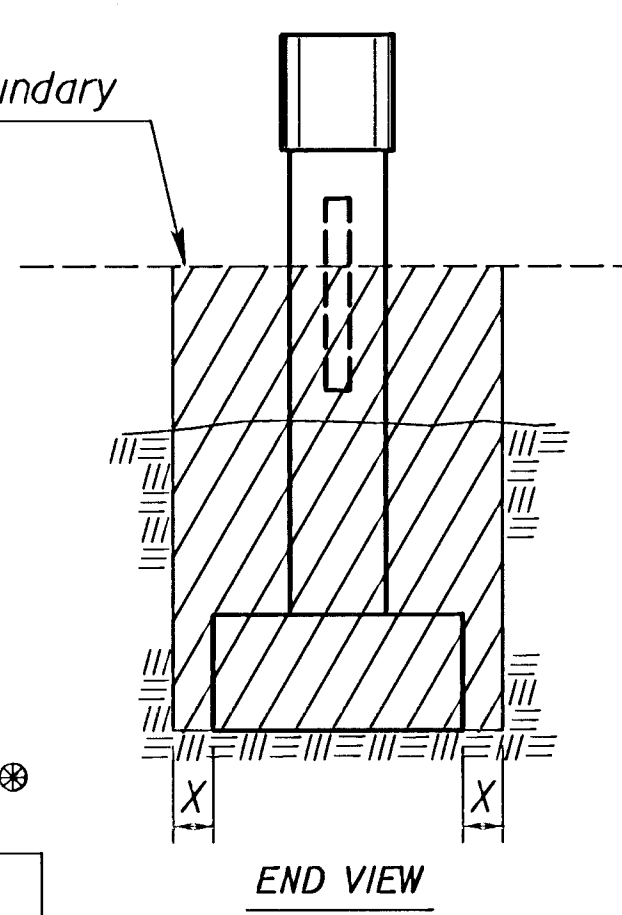

Note: Excavation below top of rock, hard shale or below top of footing, whichever is lower, shall be to neat lines of the concrete construction.

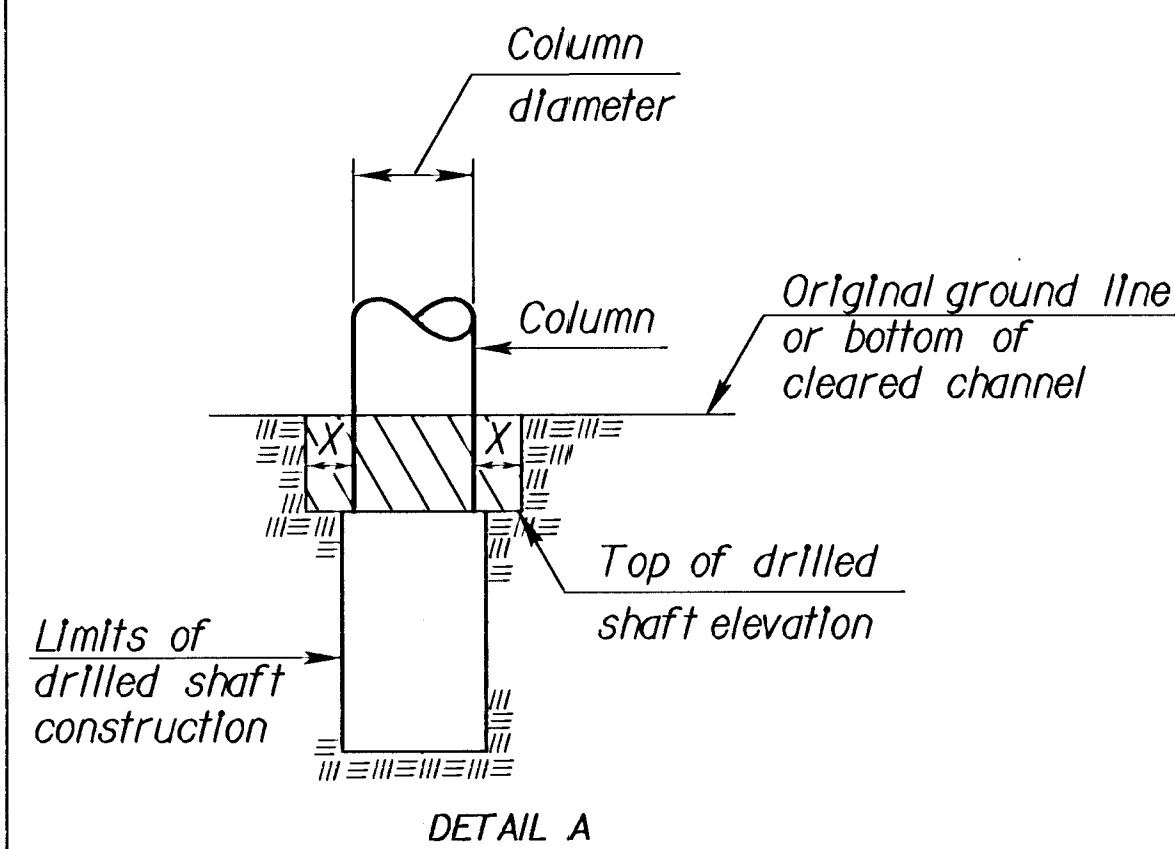

Limits of drilled shaft construction

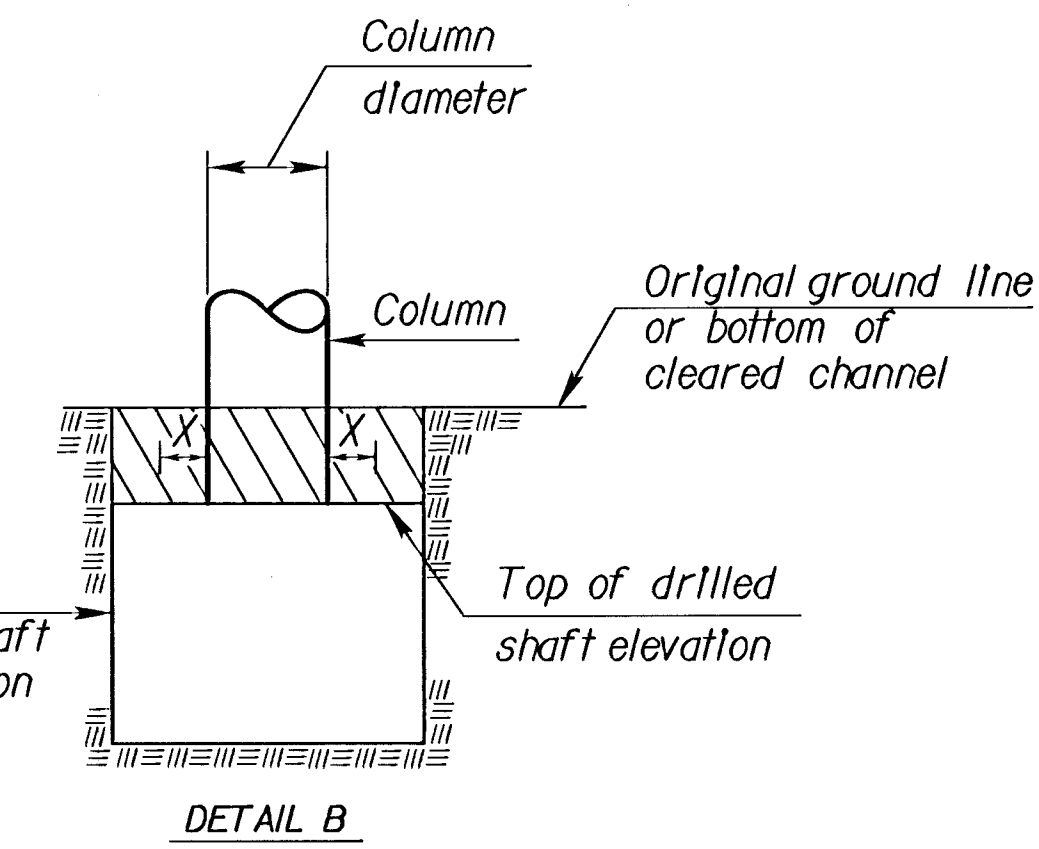

Note: Whenever the limits of the drilled shaft construction are greater than the Column Diameter + 2X, the limits of Class I, II, or III Excavation shall be the limits of the drilled shaft construction. (See Detail B)

DRILLED SHAFT DETAILS

Note: Compute bridge excavation on the basis of the cross-hatch areas and boundary lines indicated on this sheet and the Excavation Boundary Plane on the Construction Layout.
When the trench is more than 1 500 mm in depth and 2 500 mm in length, shore, sheet, brace or otherwise support the sides of the trench in hard or compacted soil including embankments. In lieu of the shoring, the sides of the trench above the 1 500 mm level may be sloped to preclude collapse. The slope for average soils shall be 1:1. If the angle of repose of the soil is less, flatter slopes shall be required.

Note: Class III Excavation will be subsidiary to Class AAA Concrete (AE). This sheet included for information only.

Dimension "X" shall be 600 mm unless indicated otherwise on the general plans.
Dimension "Y" shall be 450 mm unless indicated otherwise on the general plans.

NO.	DATE	REVISIONS	BY	APP'D
4	4-10-02	Added "Foundation Stab." Note	RAM	KFH
3	3-19-02	Concrete from Class to Grade	RAM	KFH
2	8-12-95	Correct Section BB at abutment	LRR	KFH
1	1-30-95	Drilled Shaft Excavation	LRR	KFH

KANSAS DEPARTMENT OF TRANSPORTATION

BRIDGE EXCAVATION

DESIGNED	DETAILED	QUANTITIES	CADD
BRIGGS-SI	BRIGGS-SI	BRIGGS-SI	BRIGGS-SI
DESIGN CK.	DETAIL CK.	LRR	QUAN. CK.

Std. Base File: br100si.dgn
 Plotted By: mark
 File: g:\CM\1\01079\0206\br100si.dgn
 Plot Date: 07/27/03
 Plot Location: %KD07GRP%