


FHWA REGION NO.	STATE	PROJECT NUMBER	FISCAL YEAR	SHEET NUMBER	TOTAL SHEETS
7	KANSAS	87N-0080-01	1997	7	162

DATE	BY	REFERENCES NOTED	REFERENCES CHECKED

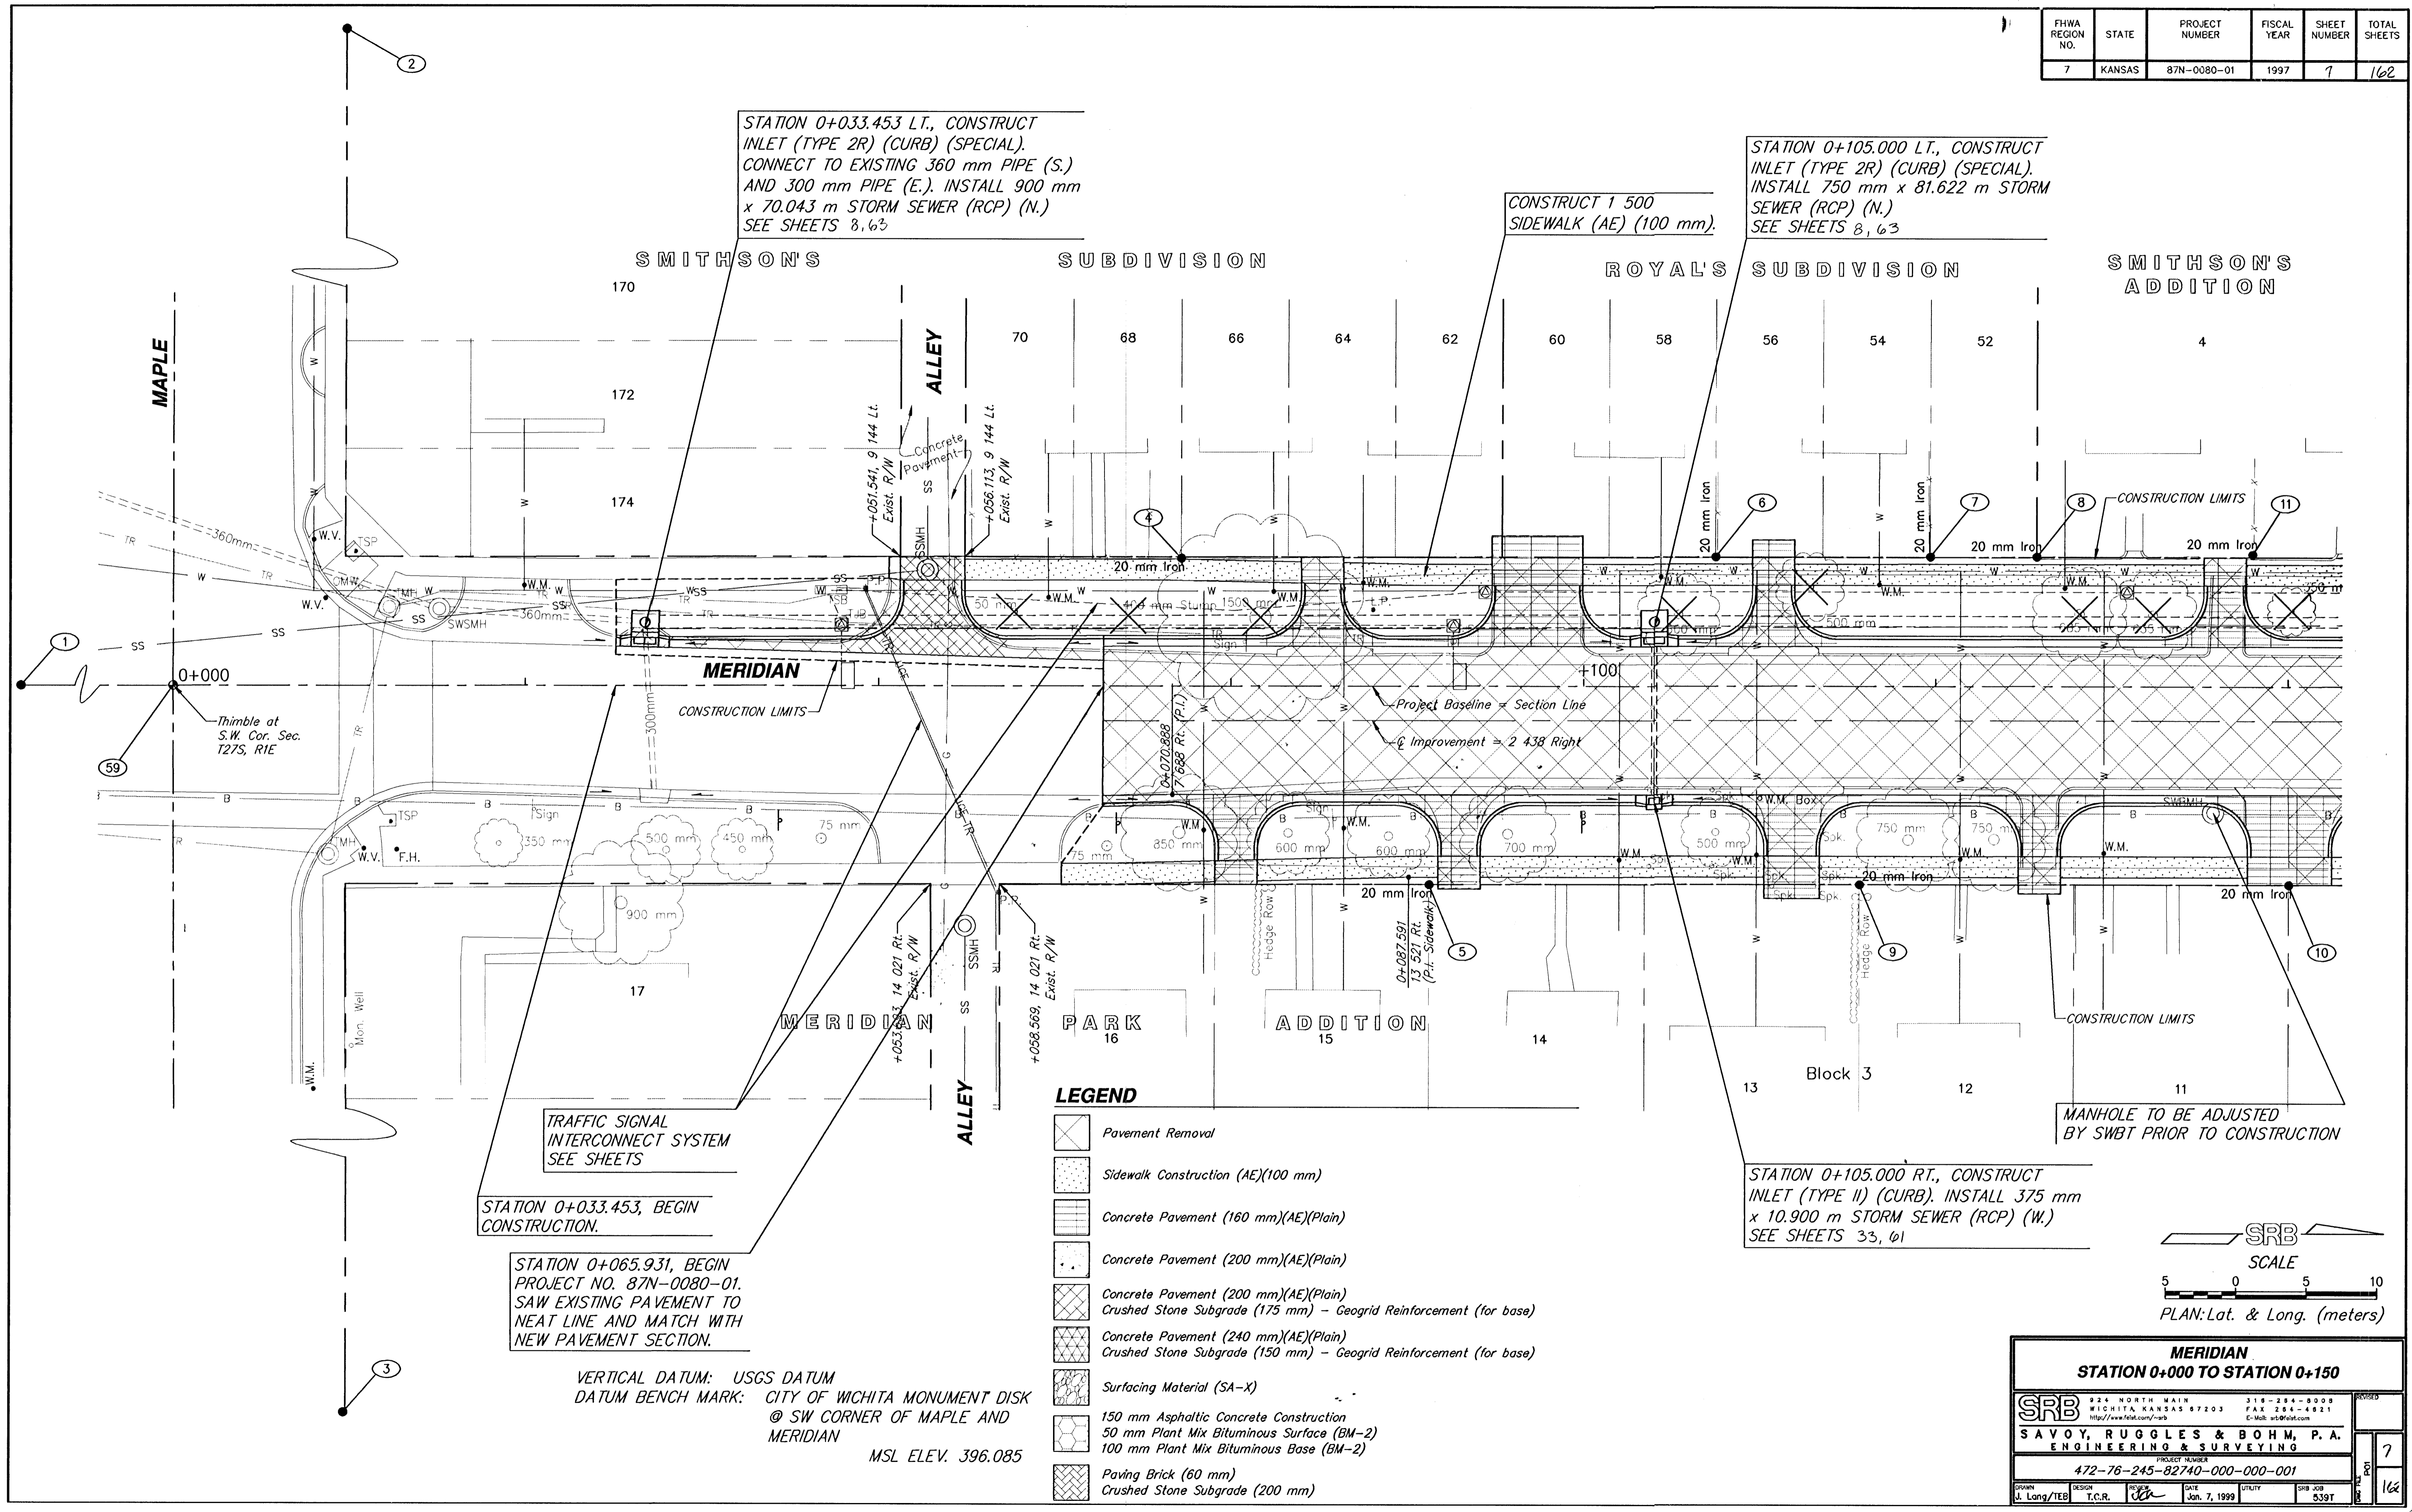

STATION 0+033.453 LT., CONSTRUCT INLET (TYPE 2R) (CURB) (SPECIAL). CONNECT TO EXISTING 360 mm PIPE (S.) AND 300 mm PIPE (E.). INSTALL 900 mm x 70.043 m STORM SEWER (RCP) (N.) SEE SHEETS 8, 63

STATION 0+105.000 LT., CONSTRUCT INLET (TYPE 2R) (CURB) (SPECIAL). INSTALL 750 mm x 81.622 m STORM SEWER (RCP) (N.) SEE SHEETS 8, 63

CONSTRUCT 1 500 SIDEWALK (AE) (100 mm).

TRAFFIC SIGNAL INTERCONNECT SYSTEM SEE SHEETS

STATION 0+033.453, BEGIN CONSTRUCTION.


STATION 0+065.931, BEGIN PROJECT NO. 87N-0080-01. SAW EXISTING PAVEMENT TO NEAT LINE AND MATCH WITH NEW PAVEMENT SECTION.

VERTICAL DATUM: USGS DATUM
 DATUM BENCH MARK: CITY OF WICHITA MONUMENT DISK @ SW CORNER OF MAPLE AND MERIDIAN
 MSL ELEV. 396.085

STATION 0+105.000 RT., CONSTRUCT INLET (TYPE II) (CURB). INSTALL 375 mm x 10.900 m STORM SEWER (RCP) (W.) SEE SHEETS 33, 61

MANHOLE TO BE ADJUSTED BY SWBT PRIOR TO CONSTRUCTION

- LEGEND**
- Pavement Removal
 - Sidewalk Construction (AE)(100 mm)
 - Concrete Pavement (160 mm)(AE)(Plain)
 - Concrete Pavement (200 mm)(AE)(Plain)
 - Concrete Pavement (200 mm)(AE)(Plain) Crushed Stone Subgrade (175 mm) - Geogrid Reinforcement (for base)
 - Concrete Pavement (240 mm)(AE)(Plain) Crushed Stone Subgrade (150 mm) - Geogrid Reinforcement (for base)
 - Surfacing Material (SA-X)
 - 150 mm Asphaltic Concrete Construction 50 mm Plant Mix Bituminous Surface (BM-2) 100 mm Plant Mix Bituminous Base (BM-2)
 - Paving Brick (60 mm) Crushed Stone Subgrade (200 mm)

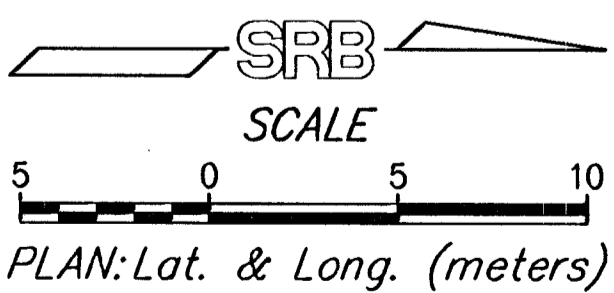

MERIDIAN
STATION 0+000 TO STATION 0+150

		924 NORTH MAIN WICHITA, KANSAS 67203 http://www.felco.com/srb	316-284-8008 FAX 316-482-1111 E-Mail: srb@felco.com	PROJECT NUMBER 472-76-245-82740-000-001	SHEET NO. 7
SAVOY, RUGGLES & BOHM, P.A. ENGINEERING & SURVEYING		DESIGNER: T.C.R. DATE: Jan. 7, 1999 UTILITY: SRB JOB: 539T			