




CONTRACTION JOINT (C.J.)  
OR LONGITUDINAL JOINT (L.J.)

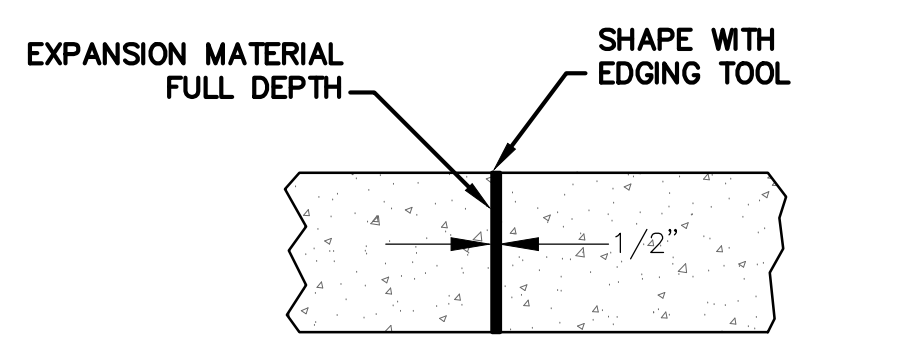


EXPANSION JOINT (E.J.)

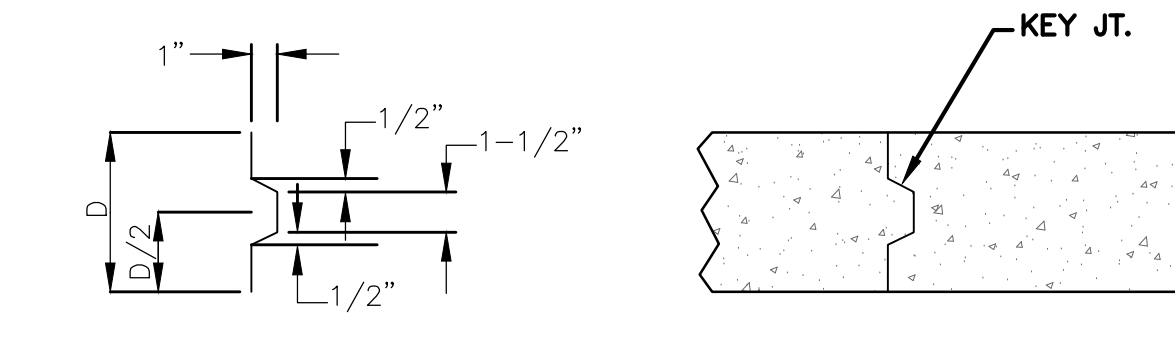


ALT. LONGITUDINAL CONSTRUCTION JOINT

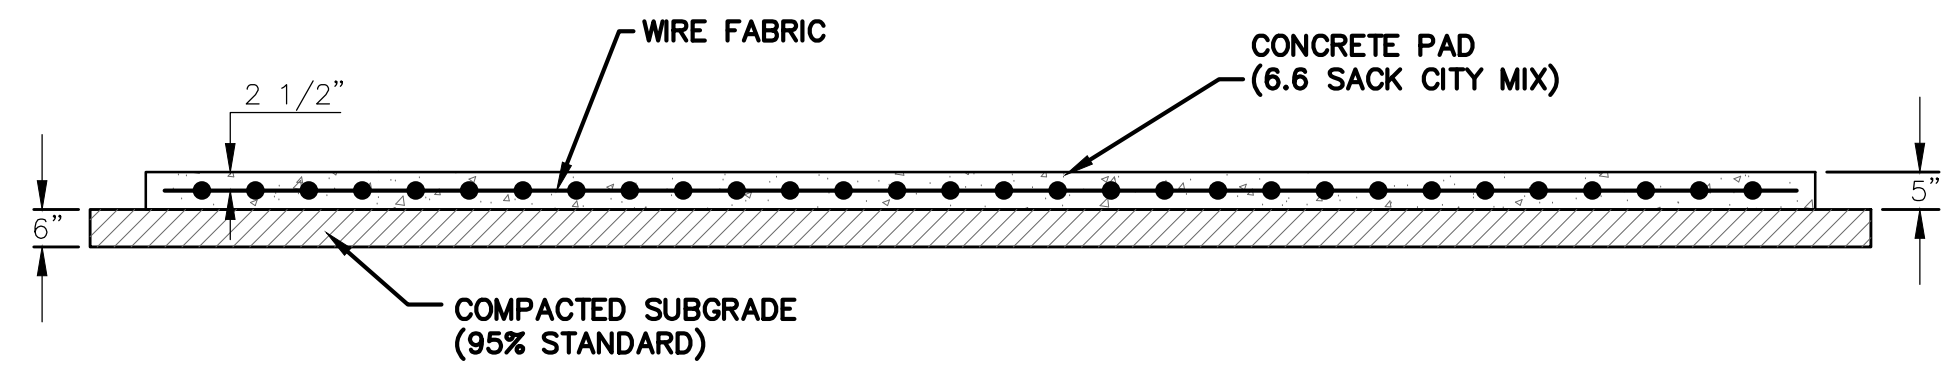


SECTION A1 - A1

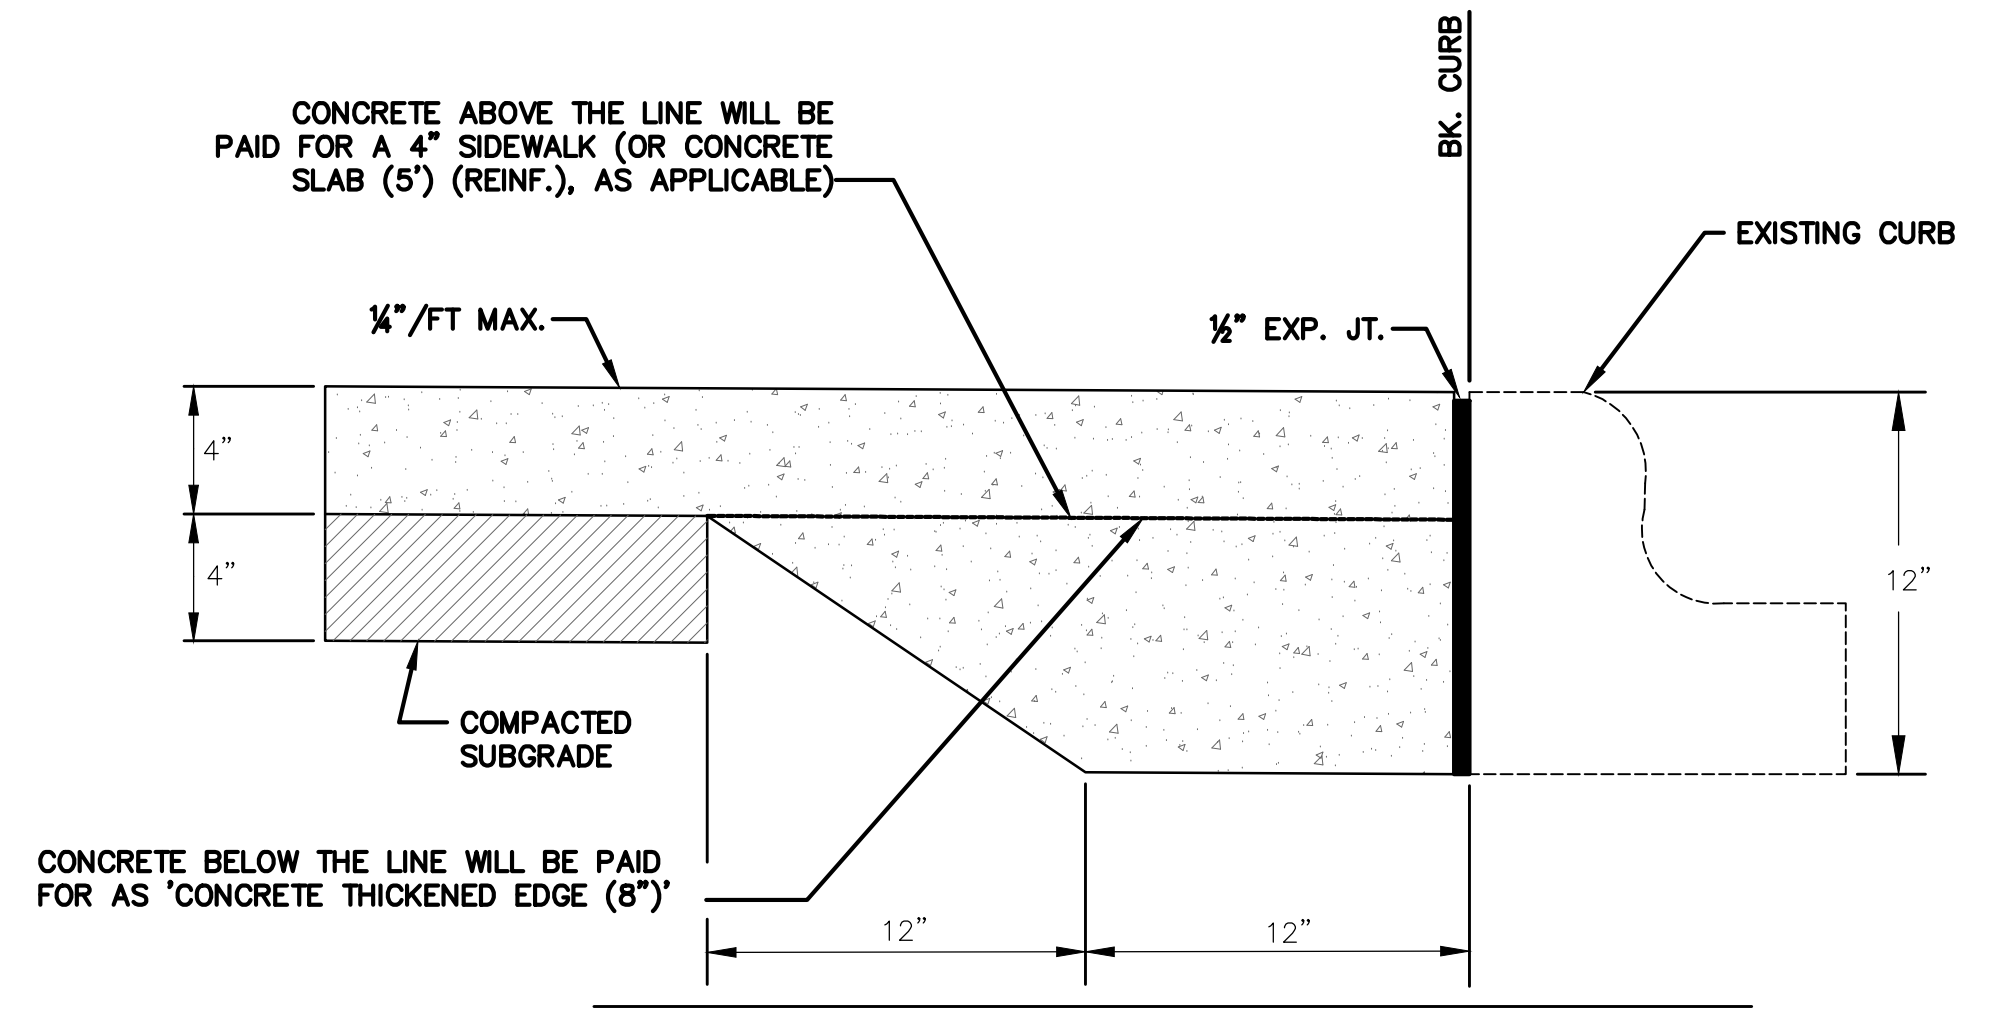

SECTION B1 - B1

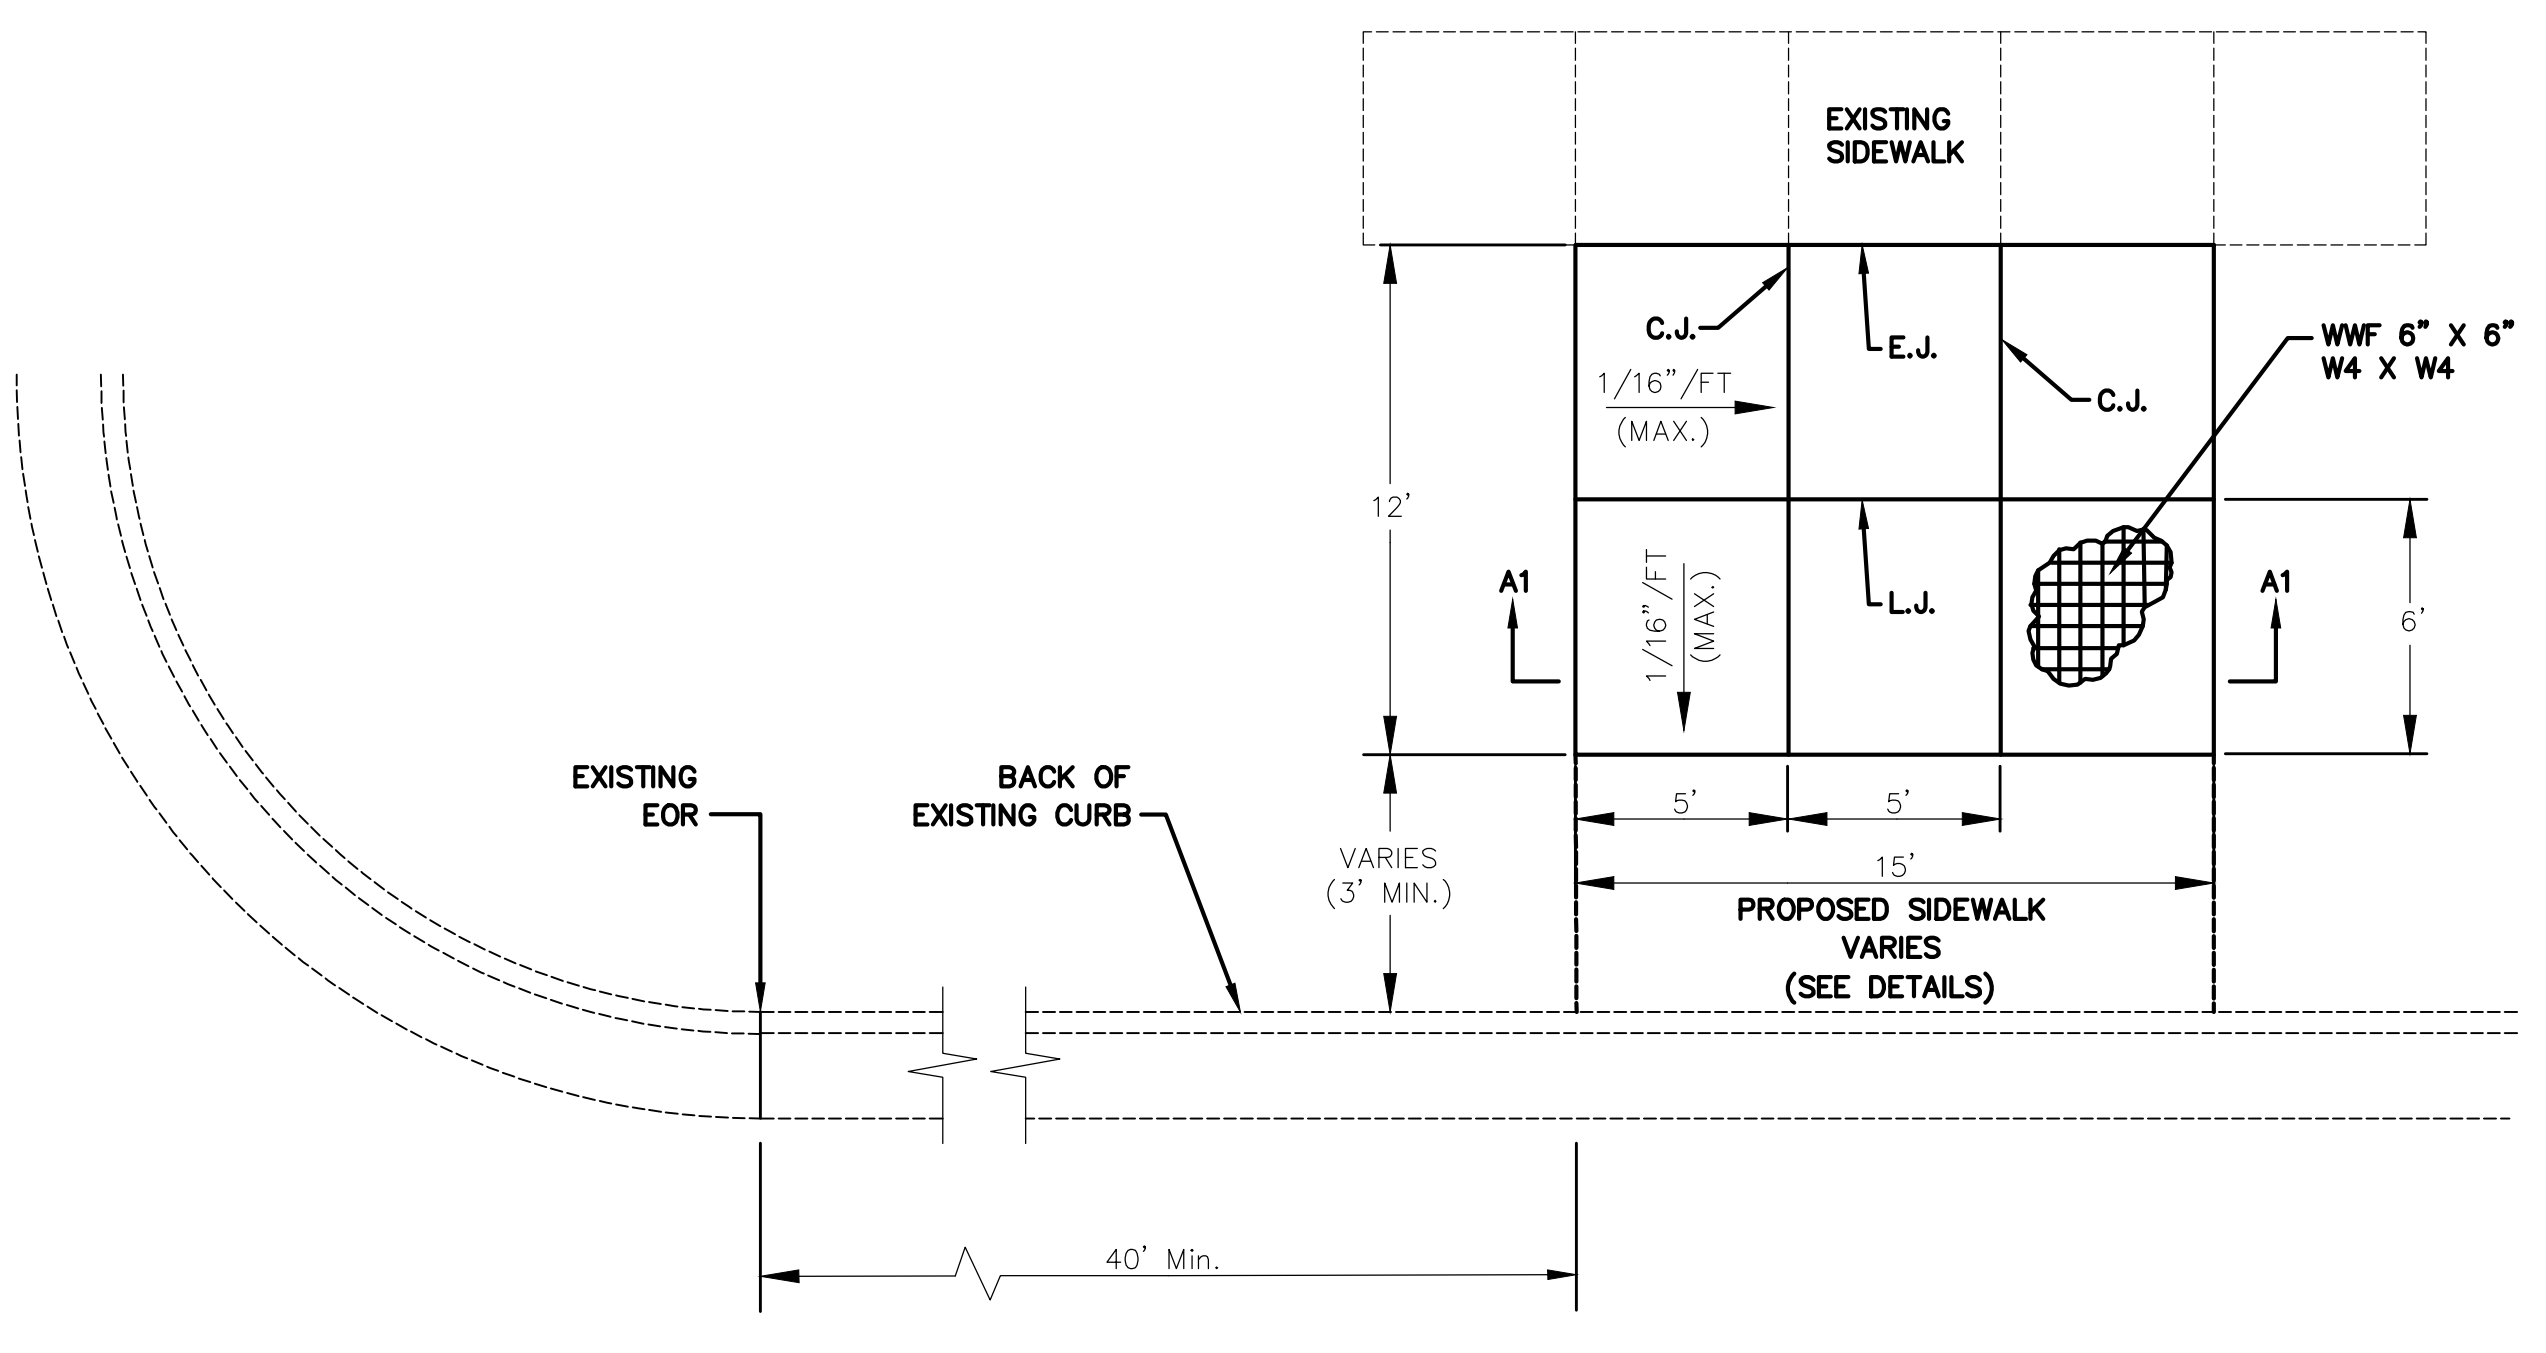


5' X 10' BUS SHELTER PAD

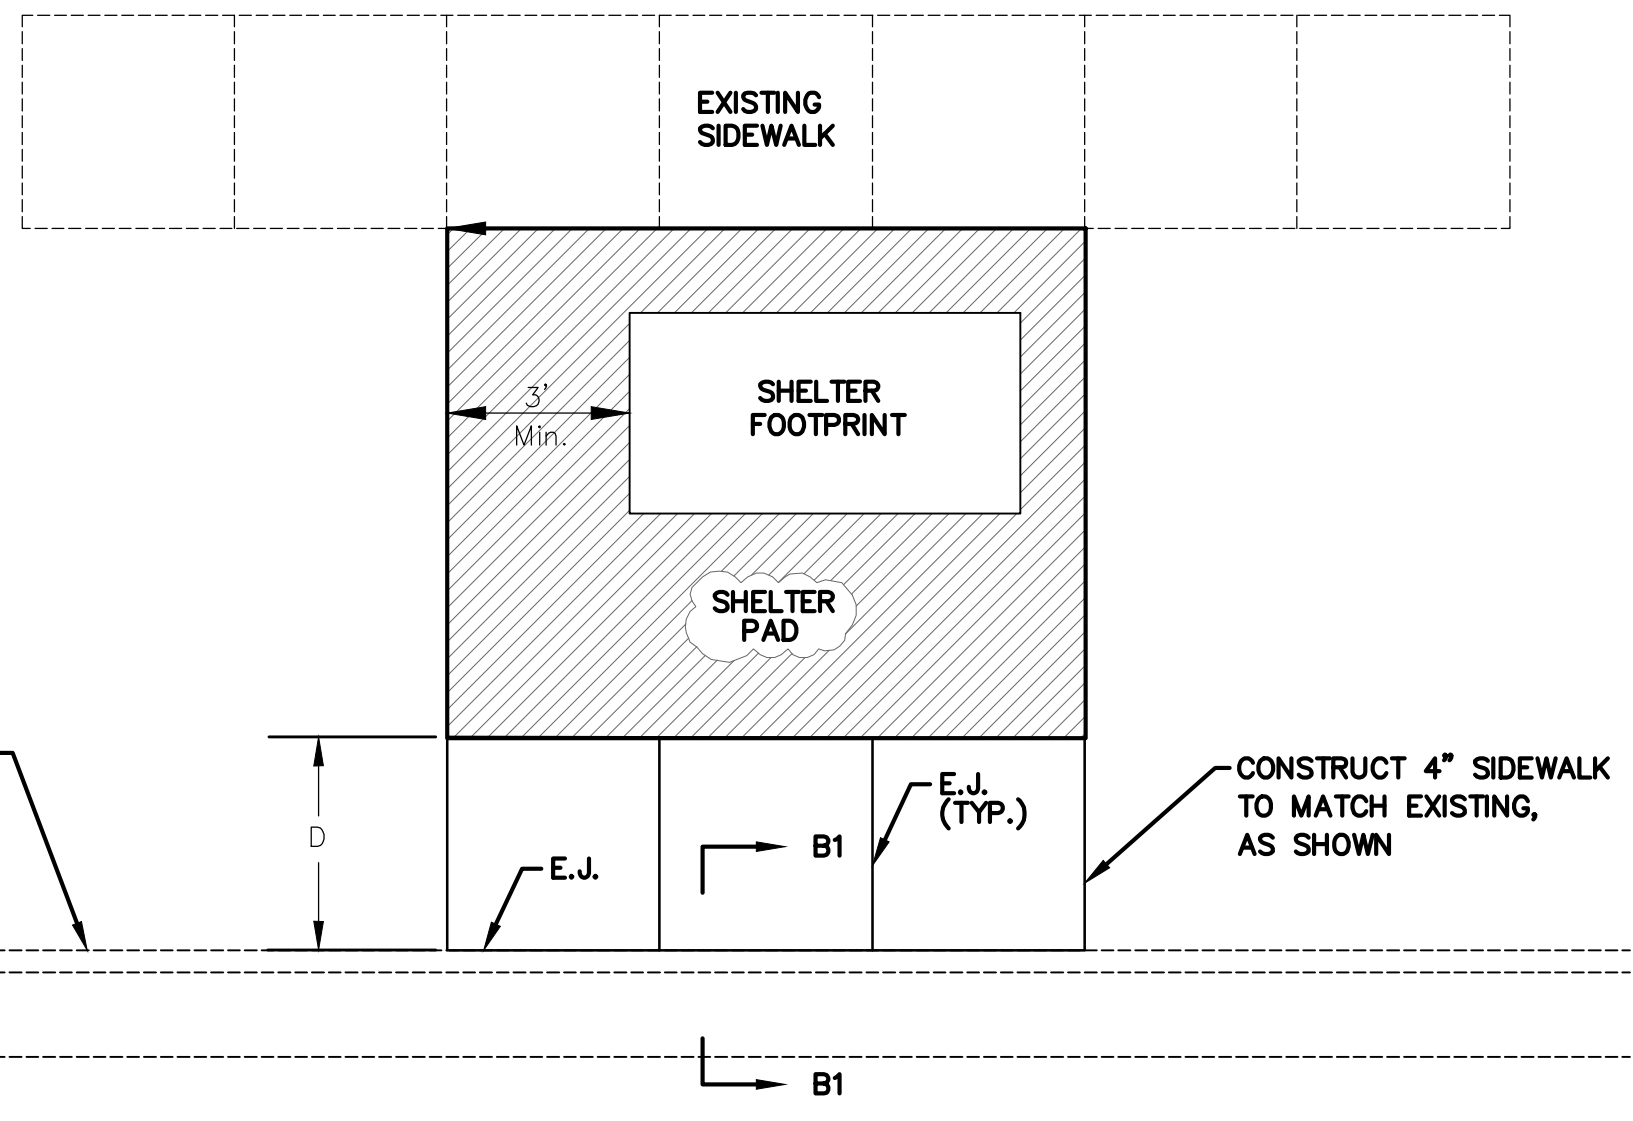


SIDEWALK CONSTRUCTION, D ≤ 5'

GENERAL NOTES

1. IN THE ABSENCE OF EXISTING SIDEWALK, THE MINIMUM 5' SET BACK DISTANCE SHALL BE MAINTAINED.
2. EXCEPT AS OTHERWISE NOTED, SIDEWALK SLOPE MUST NOT EXCEED 5% IN THE DIRECTION OF TRAVEL, OR 2% PERPENDICULAR TO THE DIRECTION OF TRAVEL.
3. ALL SIDEWALK WITHIN 5' OF BACK-OF-CURB MUST BE CONSTRUCTED AS A LANDING AREA, WITH SLOPES NOT IN EXCESS OF 2% IN ANY DIRECTION.
4. ALL CONCRETE MUST MEET THE REQUIREMENTS OF THE 6.6 SACK CITY MIX.

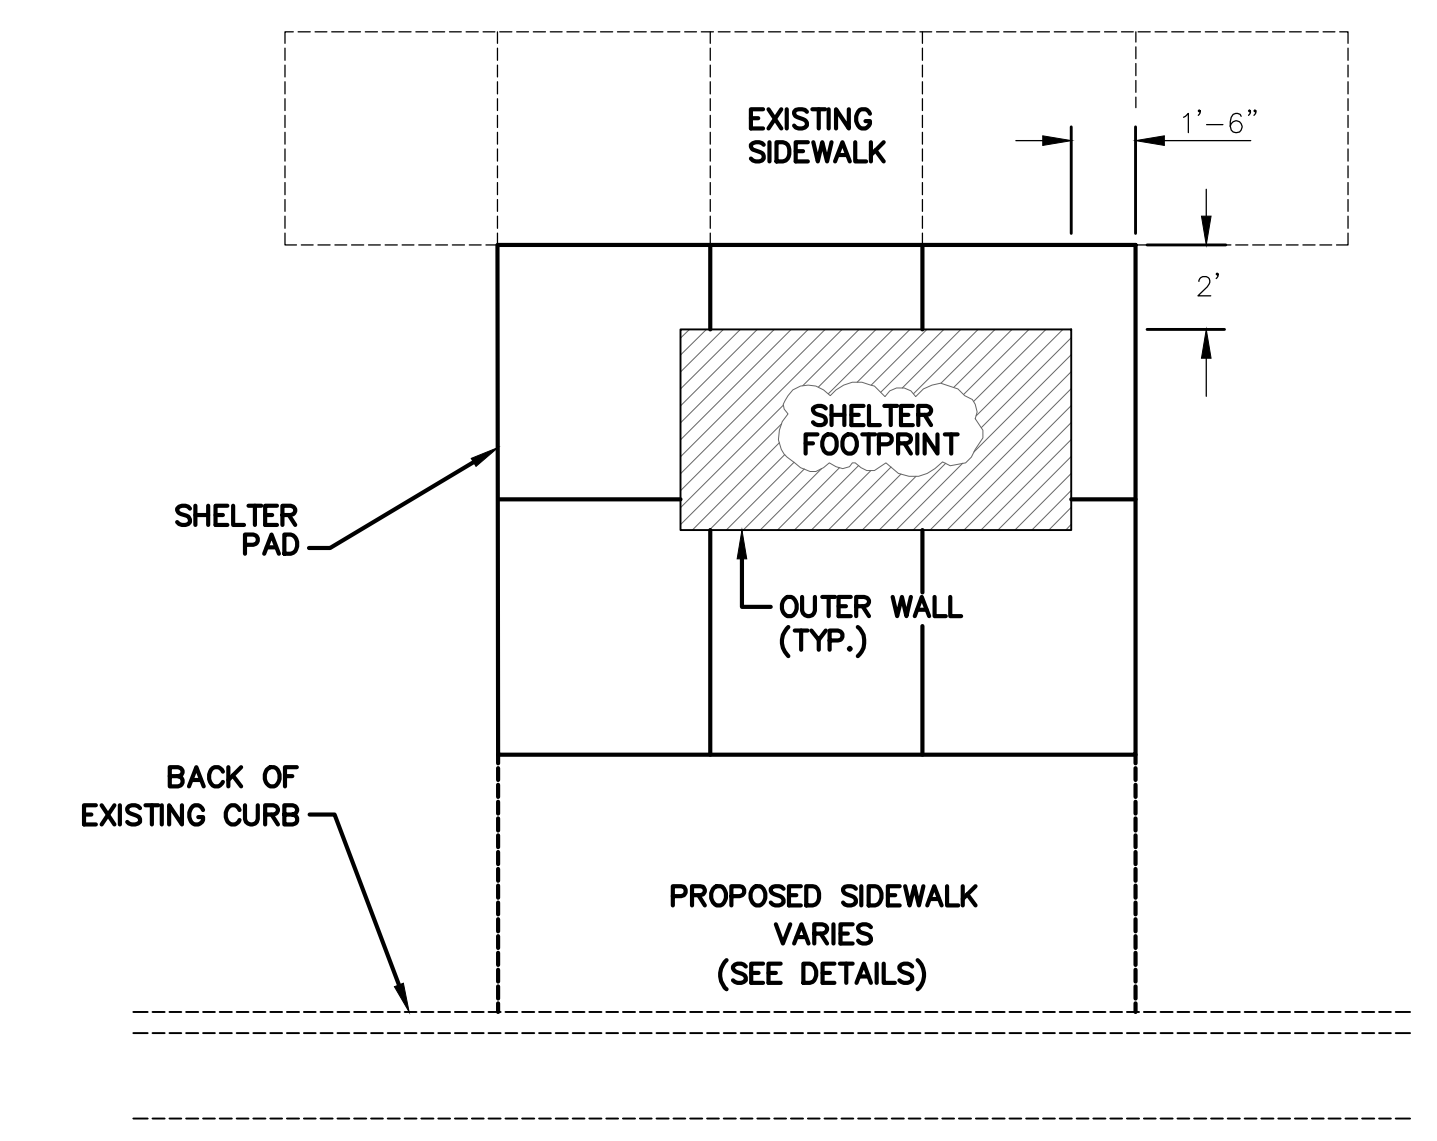

5' X 10' SHELTER LAYOUT

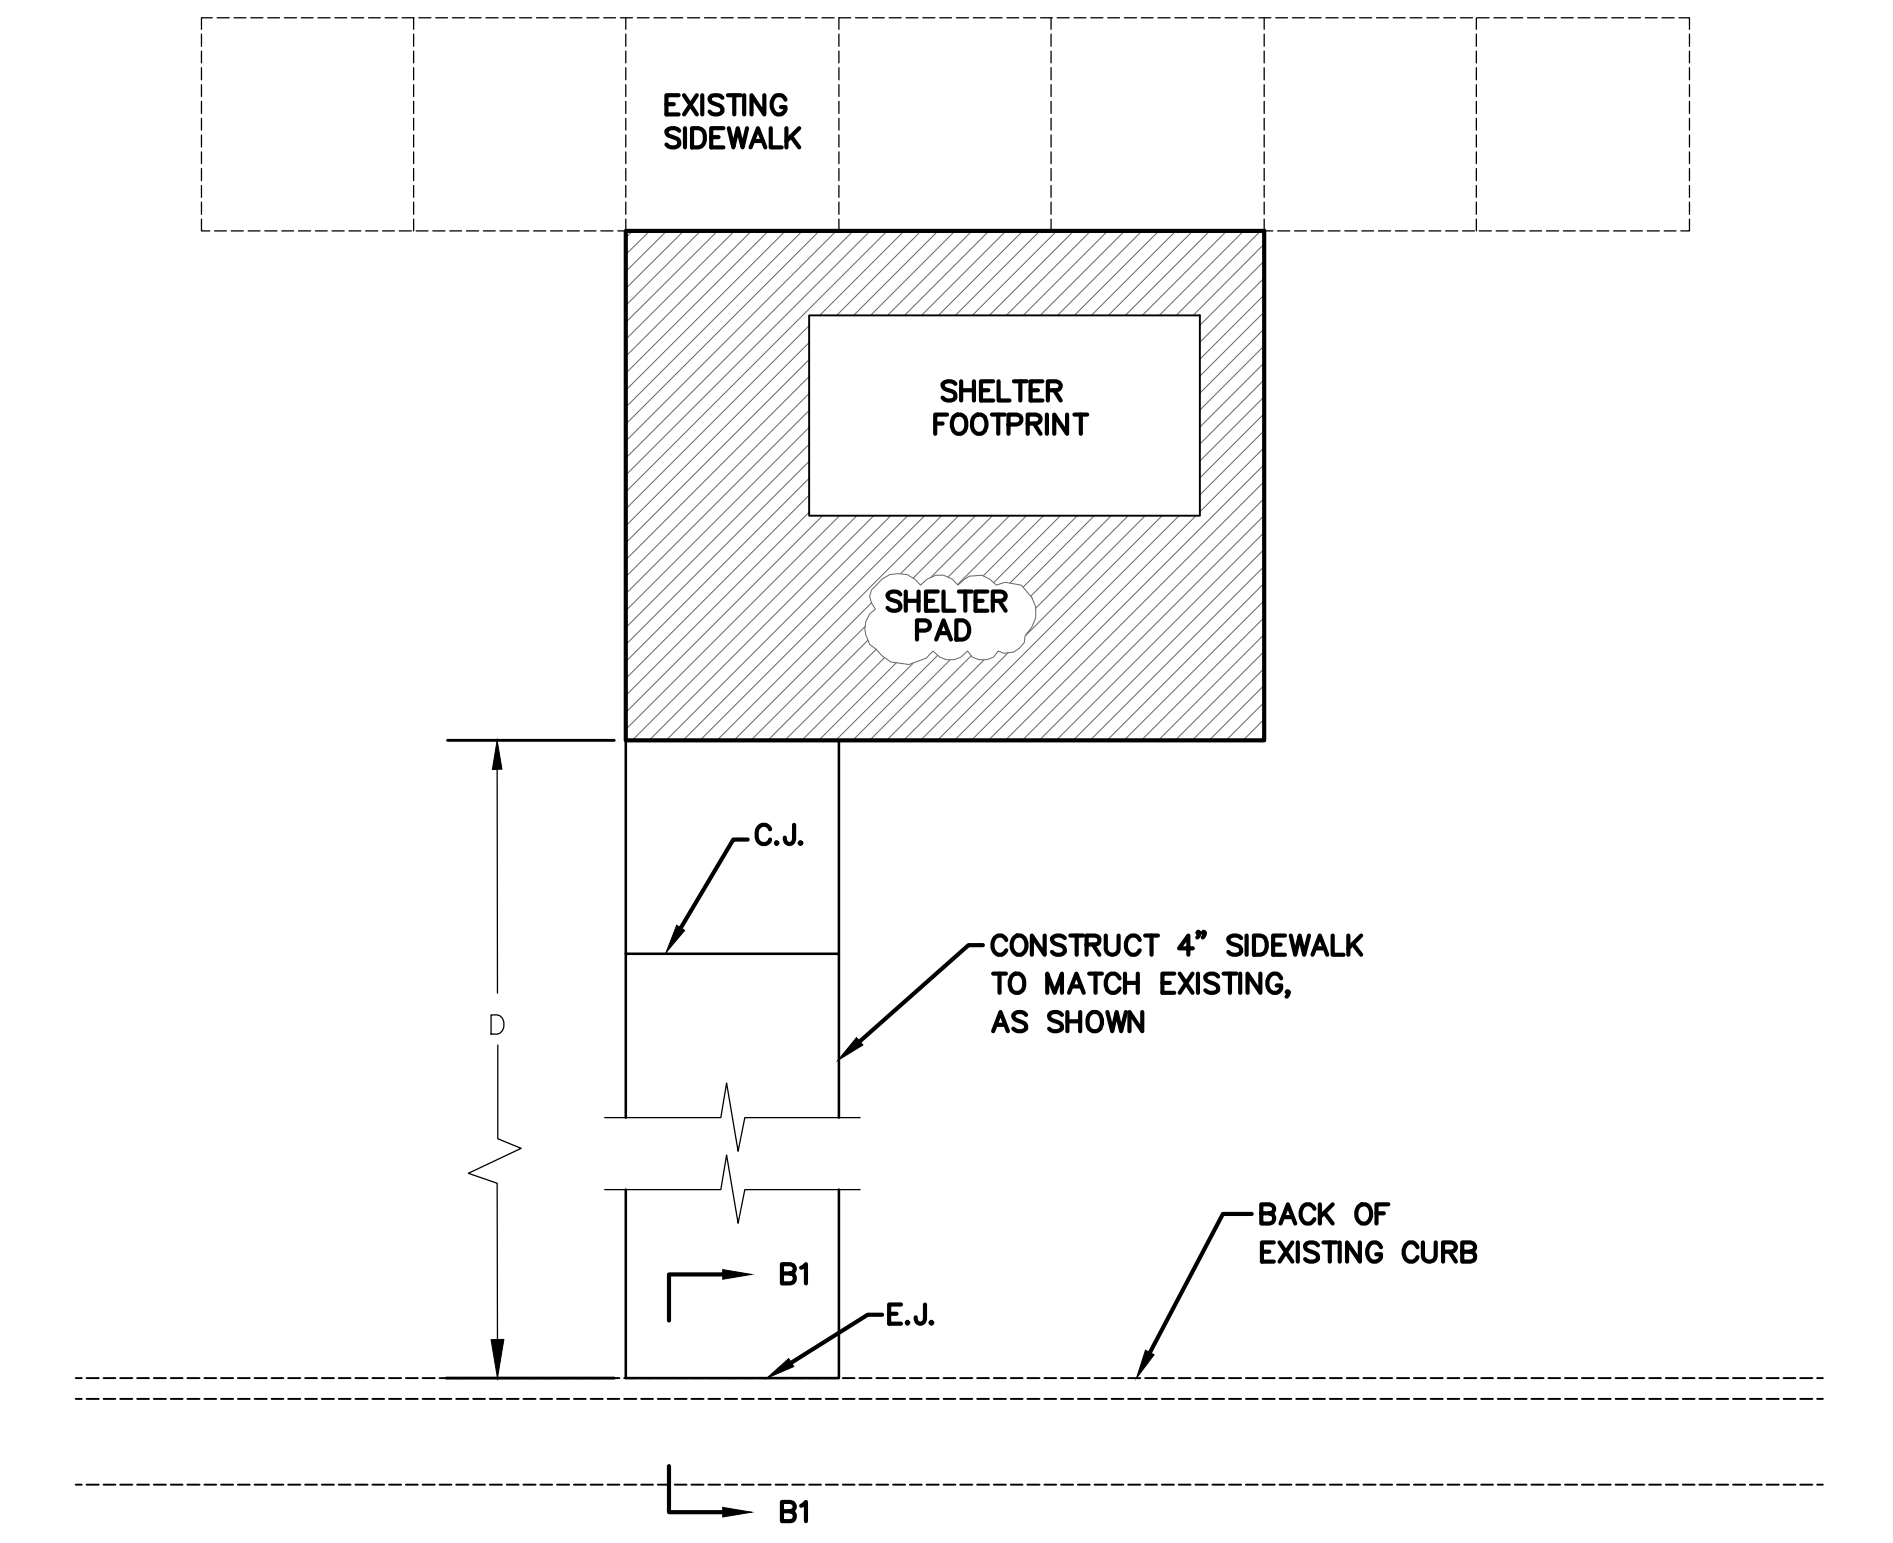

SIDEWALK CONSTRUCTION, D > 5'

**CITY OF WICHITA**  
PUBLIC WORKS & UTILITIES  
ENGINEERING DIVISION

<b>5' X 10' SHELTER STANDARD DETAILS</b>		
CITY ENGINEER <b>GARY JANZEN, P.E.</b>		
PROJECT NUMBER	OCA NUMBER	DATE
CITY ENGINEER'S OFFICE CITY HALL - SEVENTH FLOOR 455 NORTH MAIN STREET WICHITA, KANSAS 67202-1620 (316) 268-4501		SHEET <b>14</b> of <b>110</b>