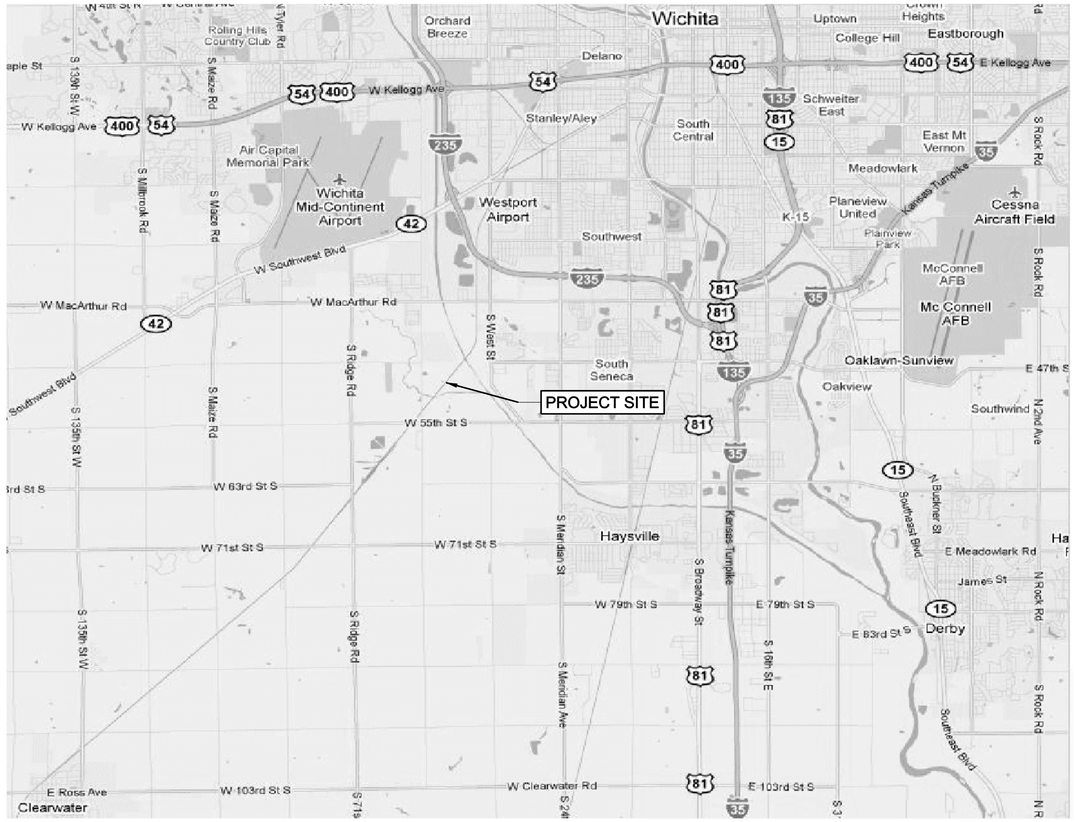


VICINITY MAP
NOT TO SCALE

## DRAWING INDEX


| | |
|---|---|
| C-001 | COVER SHEET |
| C-002 | VICINITY MAP, DRAWING INDEX AND QUANTITIES |
| C-003 | GENERAL NOTES |
| C-101 | RIGHT OF WAY PLAN |
| C-200 | OVERALL SITE PLAN |
| C-201 | SITE PLAN AND PROFILE |
| C-202 | TYPICAL SECTIONS AND DETAILS |
| C-203 | BORING LOGS |
| C-204 | TREE REMOVAL DETAILS |
| C-205 | POINT REPAIR GRADING DETAILS |
| C-301 | CROSS SECTIONS |
| C-302 | CROSS SECTIONS |
| C-401 | EROSION CONTROL PLAN |
| C-402 | EROSION CONTROL DETAILS |
| C-403 | EROSION MATTING DETAIL |


## BID QUANTITIES

| BID ITEM (LUMP SUM BASIS) | QTY | UNIT |
|---|---|---|
| Site Clearing & Restoration | 1 | Lump Sum |
| Excavation, Common[1] | 1572 | C.Y. |
| Borrow Excavation, (Contractor Furnished) | 5383 | C.Y. |
| Compacted fill (95% density per ASTM D698) | 6955 | C.Y. |
| Levee Surfacing (8" Recycled Asphalt Pavement)[2] | 9954 | S.Y. |
| Tree Removal[3] | 1 | L.S. |
| Project Seeding[4] | 2 | AC |

| BID ITEMS (MEASURED QUANTITY BASIS) | QTY | UNIT |
|---|---|---|
| Fence (Flood Control, Woven Wire Type B) | 2776 | L.F. |
| Fence Removal | 2257 | L.F. |
| Erosion Control Blanket[5] | 4410 | S.Y. |
| Erosion Control BMP (Silt Barrier) | 1389 | L.F. |
| Erosion Control BMP (Ditch Check Protection) | 8 | EA. |
| Erosion Control BMP (Stabilized Entrance) | 1 | EA. |

1. Includes excavation of drainage swale.
2. Includes all surfacing preparation, such as grading and compacted earth fill as well as recycled asphalt pavement surfacing and final grading.
3. Includes removal and/or trimming, debris and tree disposal, embankment repair, grading and revegetation of the removal area.
4. Includes seedbed preparation, fertilizer, mulch, and cost associated with grass establishment.
5. Area shown has been measured along the face of slope for all slopes 3:1 or steeper, and any other areas required to receive EC Blanket.

| MARK | DESCRIPTION | DATE | APPR. |
|---|---|---|---|


amec
AMEC Earth & Environmental, Inc.
1129 SW Wanamaker
Topeka, Kansas 66604
Phone: (785) 272-4830
Fax: (785) 272-4878


CITY OF WICHITA

Levee "C" Freeboard Remediation (Station 410+00 to Railroad) Improvements For the WICHITA-VALLEY CENTER LOCAL FLOOD PROTECTION PROJECT
WICHITA, KANSAS

PREPARED FOR
THE CITY OF WICHITA, KANSAS
455 N. Main
Wichita, KS 67202

LAWRENCE J. SAMPLE
LICENSED
15855
11/26/2011
KANSAS
PROFESSIONAL ENGINEER

| | | |
|---|---|---|
| DESIGNED BY: Larry J. Sample, P.E. | | DATE: 2011/Jan/26 |
| DWN BY: Staff | CKD BY: LBK | APP BY: LJS |
| FILE NAME: 02_VIC MAP, DRAWING INDEX AND QUANTITIES.dgn | | |
| AMEC PROJ. NO. 5-6150-0001 | | |

VICINITY MAP, DRAWING INDEX AND QUANTITIES

C-002
SHEET 2 OF 15