




FHWA REGION NO.	STATE	PROJECT NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
7	KANSAS	87 N-0303-01	2003	5	143

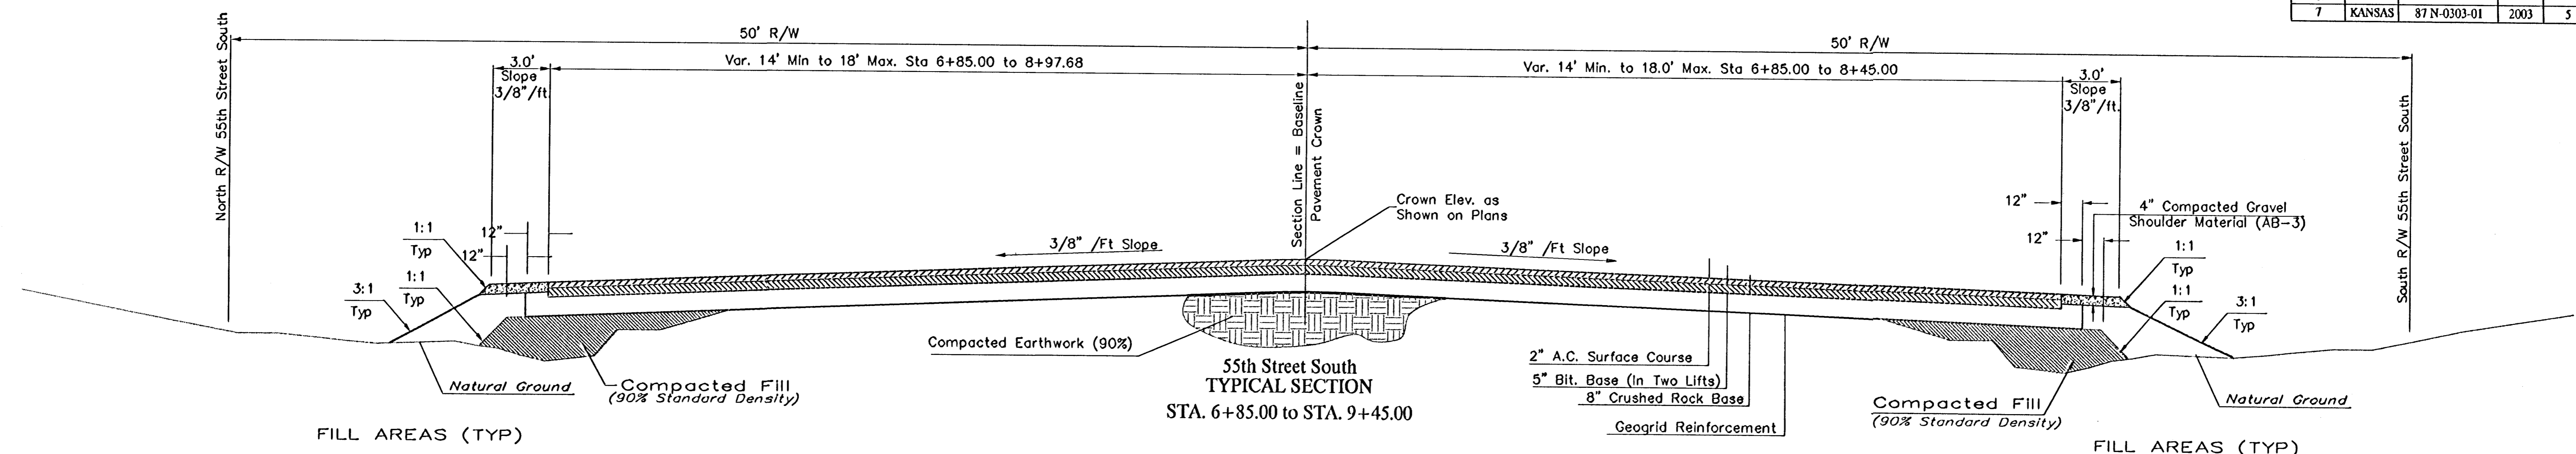

55th Street South
TYPICAL SECTION
STA. 6+85.00 TO STA. 9+45.00

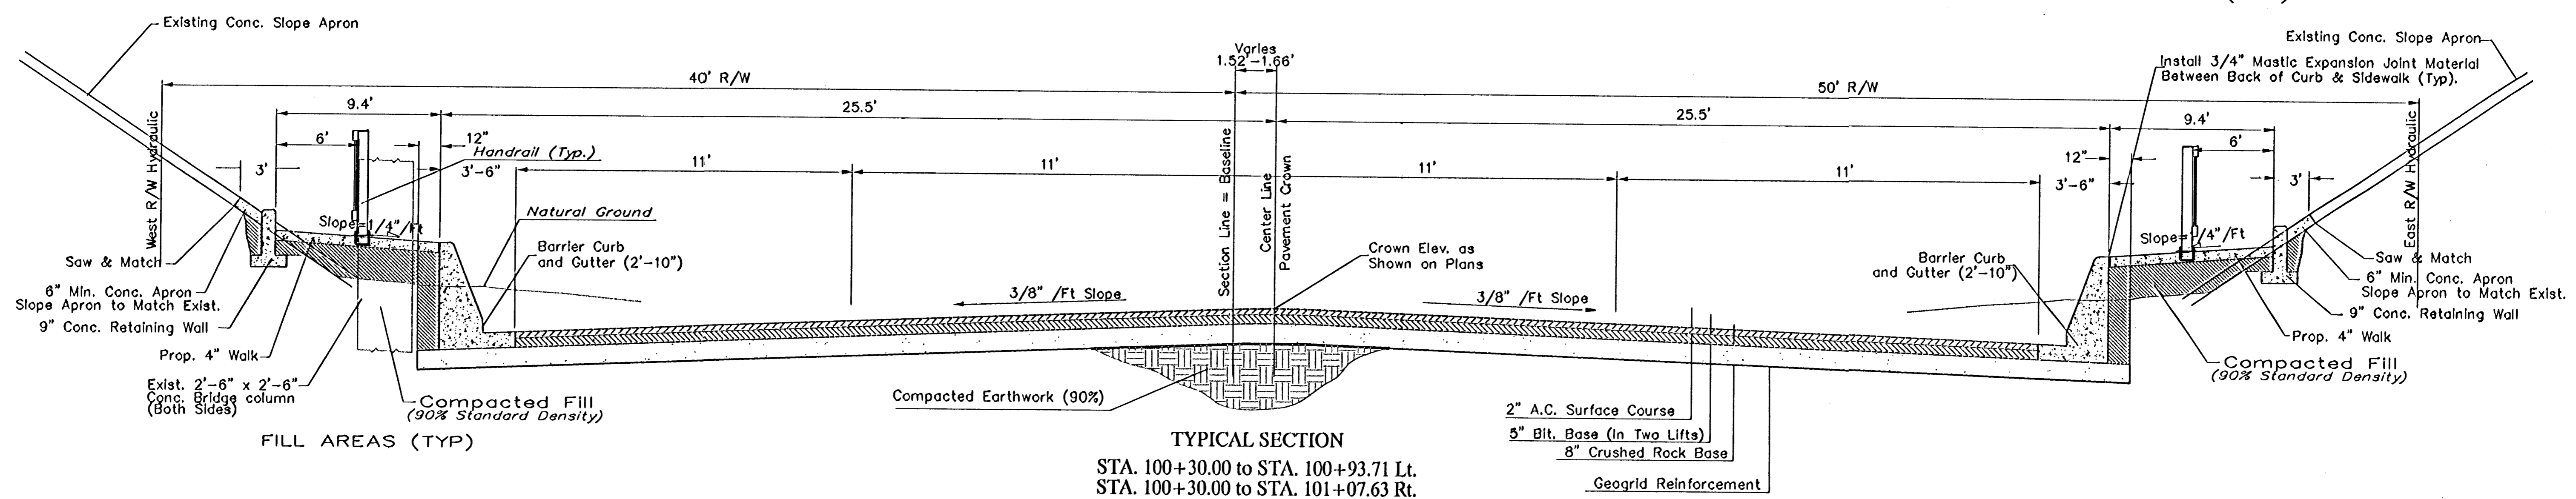

TYPICAL SECTION
STA. 100+30.00 TO STA. 100+93.71 Lt.
STA. 100+30.00 TO STA. 101+07.63 Rt.

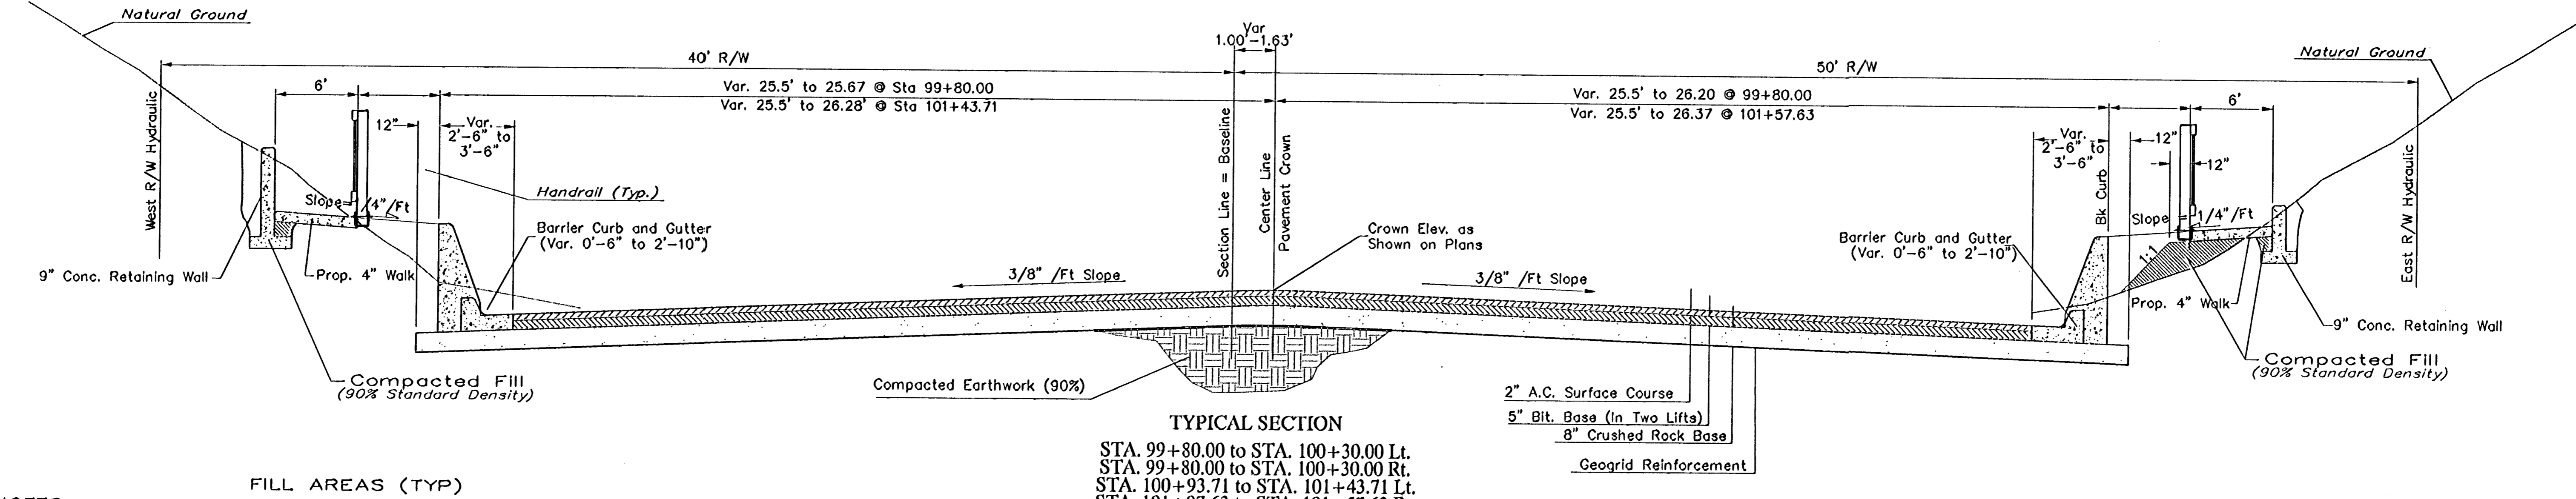

TYPICAL SECTION
STA. 99+80.00 TO STA. 100+30.00 Lt.
STA. 99+80.00 TO STA. 100+30.00 Rt.
STA. 100+93.71 TO STA. 101+43.71 Lt.
STA. 101+07.63 TO STA. 101+57.63 Rt.

GENERAL NOTES:

- The Asphaltic Concrete Pavement Between the Combined Curb and Gutter Shall be Paid for as Square Yards of 7" Asphaltic Concrete (5" Bituminous Base).
- Bituminous Base and Asphaltic Concrete Wearing Surface Shall be Placed With a Laydown Machine Having Automatic Controls for Line and Grade.
- A Tack Coat of Emulsified Asphalt (SC-1H or CSS-1H) Shall be Applied at an Approximate Rate of 0.05 Gallons per Square Yard Between Each Lift of Asphaltic Material.
- Construction Joints in Each Lift Shall be Staggered a Minimum Distance of One (1) Foot From Joints in Preceding Lifts and Placed So That a Joint Will be Constructed on the Centerline of the Top Lift.

PROJECT NUMBER 472-83902		SHEET NAME Typsec02		ENGINEERING DIRECTORY F:\Eng\Hydraulic\details		CAPITAL IMPROVEMENT PROJECT HYDRAULIC AVENUE @ KTA & 55 TH STREET SOUTH		BAUGHMAN COMPANY, P.A. ENGINEERING, SURVEYING, & PLANNING 318-282-7271 • 315 ELLIS • WICHITA, KANSAS 67211		SHEET 5 OF 143
DESIGN JFB	DRAWN KWR	APPROVED JFB	DATE Aug 03	SCALE None	BAUGHMAN NO 99-09-12450	HYDRAULIC AVENUE PAVING - SOUTH OF 57 TH STREET SOUTH TO 47TH STREET SOUTH				