




BACK OF CURB PROTECTION DETAIL

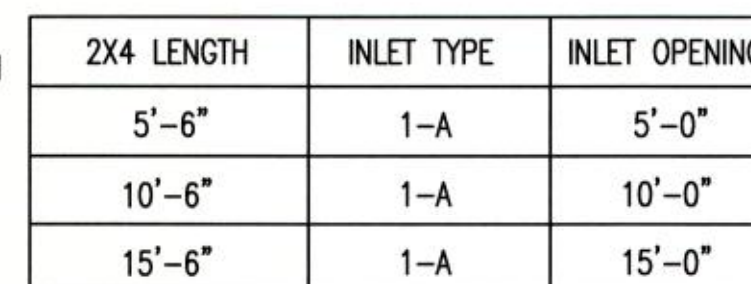

DIVERSION RIDGE REQUIRED
 WHERE GRADE EXCEEDS 2%

2% OR GREATER

EXISTING PAVED ROADWAY

FILTER FABRIC FOR STABILIZATION

SECTION C-C

SEDIMENT BARRIER
 (STRAW BALE TYPE SHOWN)

SPILLWAY

NOTE:
 USE SANDBAGS, STRAW BALES
 OR OTHER APPROVED METHODS
 TO CHANNELIZE RUNOFF TO BASIN
 AS REQUIRED.

SUPPLY WATER TO WASH
 WHEELS IF NECESSARY

20"

FLOW

FLOW

FLOW

FLOW

C

C

2"-3" COURSE
 AGGREGATE MIN.
 6" THICK

DIVERSION RIDGE

12' MIN.

50' MIN.

REVISION DATE: MAY 2013

