




*Alternate
Opening
Shape*

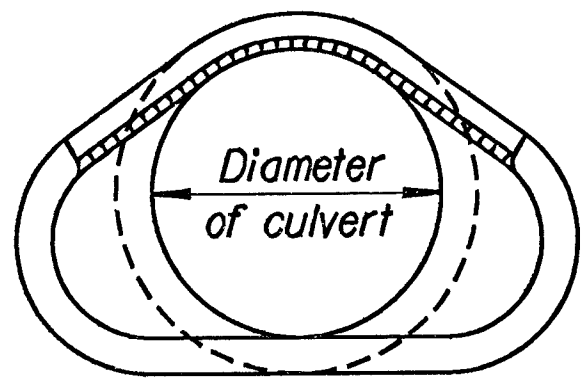

A diagram of a circular track. The track is represented by two concentric circles. The region between the two circles is shaded with diagonal lines. Two radii, labeled R , are drawn from the center of the circles to the inner boundary, defining a sector of the track.

* Minimum waterway area is calculated at the inside of the bevel.

Diam.	A	B [#]	C [#]	D	E	R ₁	Slope	T
12"	6'-0 7/8"	4'-0 7/8"	2'-0"	2'-0"	4"	9	3:1	2"
15"	6'-1"	3'-10"	2'-3"	2'-6"	6"	11	3:1	2 1/4"
18"	6'-1"	3'-10"	2'-3"	3'-0"	9"	12	3:1	2 1/2"
24"	6'-1 1/2"	2'-6"	3'-7 1/2"	4'-0"	9 1/2"	14	3:1	3"
30"	6'-1 3/4"	1'-7 3/4"	4'-6"	5'-0"	1'-0"	15	3:1	3 1/2"
36"	8'-1 3/4"	2'-10 3/4"	5'-3"	6'-0"	1'-3"	20	3:1	4"
42"	8'-2"	2'-11"	5'-3"	6'-6"	1'-9"	22	3:1	4 1/2"
48"	8'-2"	2'-2"	6'-0"	7'-0"	2'-0"	22	3:1	5"
54"	8'-2 1/4"	2'-9 1/4"	5'-5"	7'-6"	2'-3"	24	2.4 : 1	5 1/2"
60"	8'-3"	3'-3"	5'-0"	8'-0"	2'-11"	24	2:1	6"
72"	8'-3"	1'-9"	6'-6"	9'-0"	3'-0"	24	1.86 : 1	7"
84"	9'-3 1/2"	1'-9"	7'-6 1/2"	10'-0"	3'-0"	24	1.6 : 1	8"

Diam.	Min. W.W.* Area Sq.Ft.	F	G	H	I	J	K	R	T
24"	4.5	4'-3"	2'-3"	1'-5 1/8"	2'-8"	1 1/2"	8"	1'-0"	3"
30"	7.0	4'-9 1/2"	2'-9 1/2"	1'-9 1/2"	3'-4"	2"	10"	1'-3"	3 1/2"
36"	10.1	5'-4"	3'-4"	2'-1 1/2"	4'-0"	2"	1'-0"	1'-6"	4"
42"	13.7	5'-10 1/2"	3'-10 1/2"	2'-5 7/8"	4'-8"	2 1/2"	1'-2"	1'-9"	4 1/2"
48"	17.9	6'-5"	4'-5"	2'-10 1/8"	5'-4"	3"	1'-4"	2'-0"	5"
54"	22.2	6'-11 1/2"	4'-11 1/2"	3'-2 1/2"	6'-0"	3 1/2"	1'-6"	2'-3"	5 1/2"
60"	28.0	7'-6"	5'-6"	3'-6 7/8"	6'-8"	4"	1'-8"	2'-6"	6"
72"	40.3	8'-7"	6'-7"	4'-3 5/8"	8'-0"	5"	2'-0"	3'-0"	7"
84"	54.8	9'-8"	7'-8"	5'-0 3/8"	9'-4"	6"	2'-4"	3'-6"	8"

Horizontal Roadway Lt.

Length of Pipe Lt.

2'-0"

6:1 or steeper

Road surface

1:1 or variable

Bar and steel fabric reinforcement

Double reinforcement for 36" and larger pipes

Diagram illustrating an alternate plan shape for a tapered beam. The beam has a top width of G inches and a bottom width of 4 inches. The height is labeled "Greater than or equal to I ". The top surface is labeled "4:1 or flatter" and "Variable # inches". The bottom surface is labeled "4" and "T". The text "Alternate Plan Shape" is written across the middle.

Bar and steel fabric reinforcement
Double reinforcement for 36" and larger pipes

The diagram illustrates a cross-section of a reinforced concrete channel. It features a horizontal bottom slab and vertical side walls. The top of the channel is sloped. Reinforcement is shown as horizontal bars in the bottom slab and vertical bars in the walls. A label 'Bar and steel fabric reinforcement' points to these bars. An arrow labeled 'Direction of flow' points to the right. A dimension line labeled 'A' indicates the width of the channel at the top. A dashed line with a slope of 1:1 is shown on the right side of the channel.

$\frac{1}{4}'' \text{ max.}$

Diagram of a three-piece collar. The collar is composed of three pieces: two side pieces and a central piece. The side pieces are shown with dashed lines indicating the fold lines. The central piece is shown with a curved end section. A note indicates: "Round inside edge of end section, see Section A-A." A small arrow points to the curved end section.

[illegible]

IS ID. NO. 662

FHWA APPROVAL		1-6-92	APP'D JAMES O. BREWER	
DESIGNED	DETAILED	QUANTITIES	TRACED BOWSER	
DESIGN CK.	DETAIL CK.	QUAN. CK.	TRACE CK. SEITZ	