
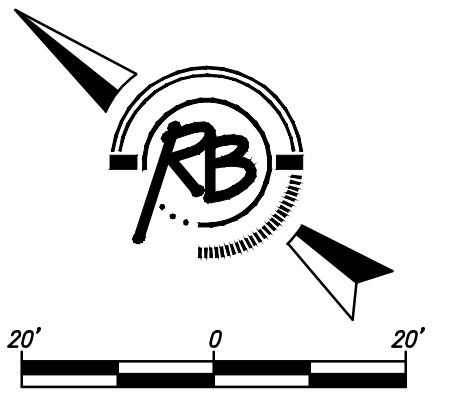
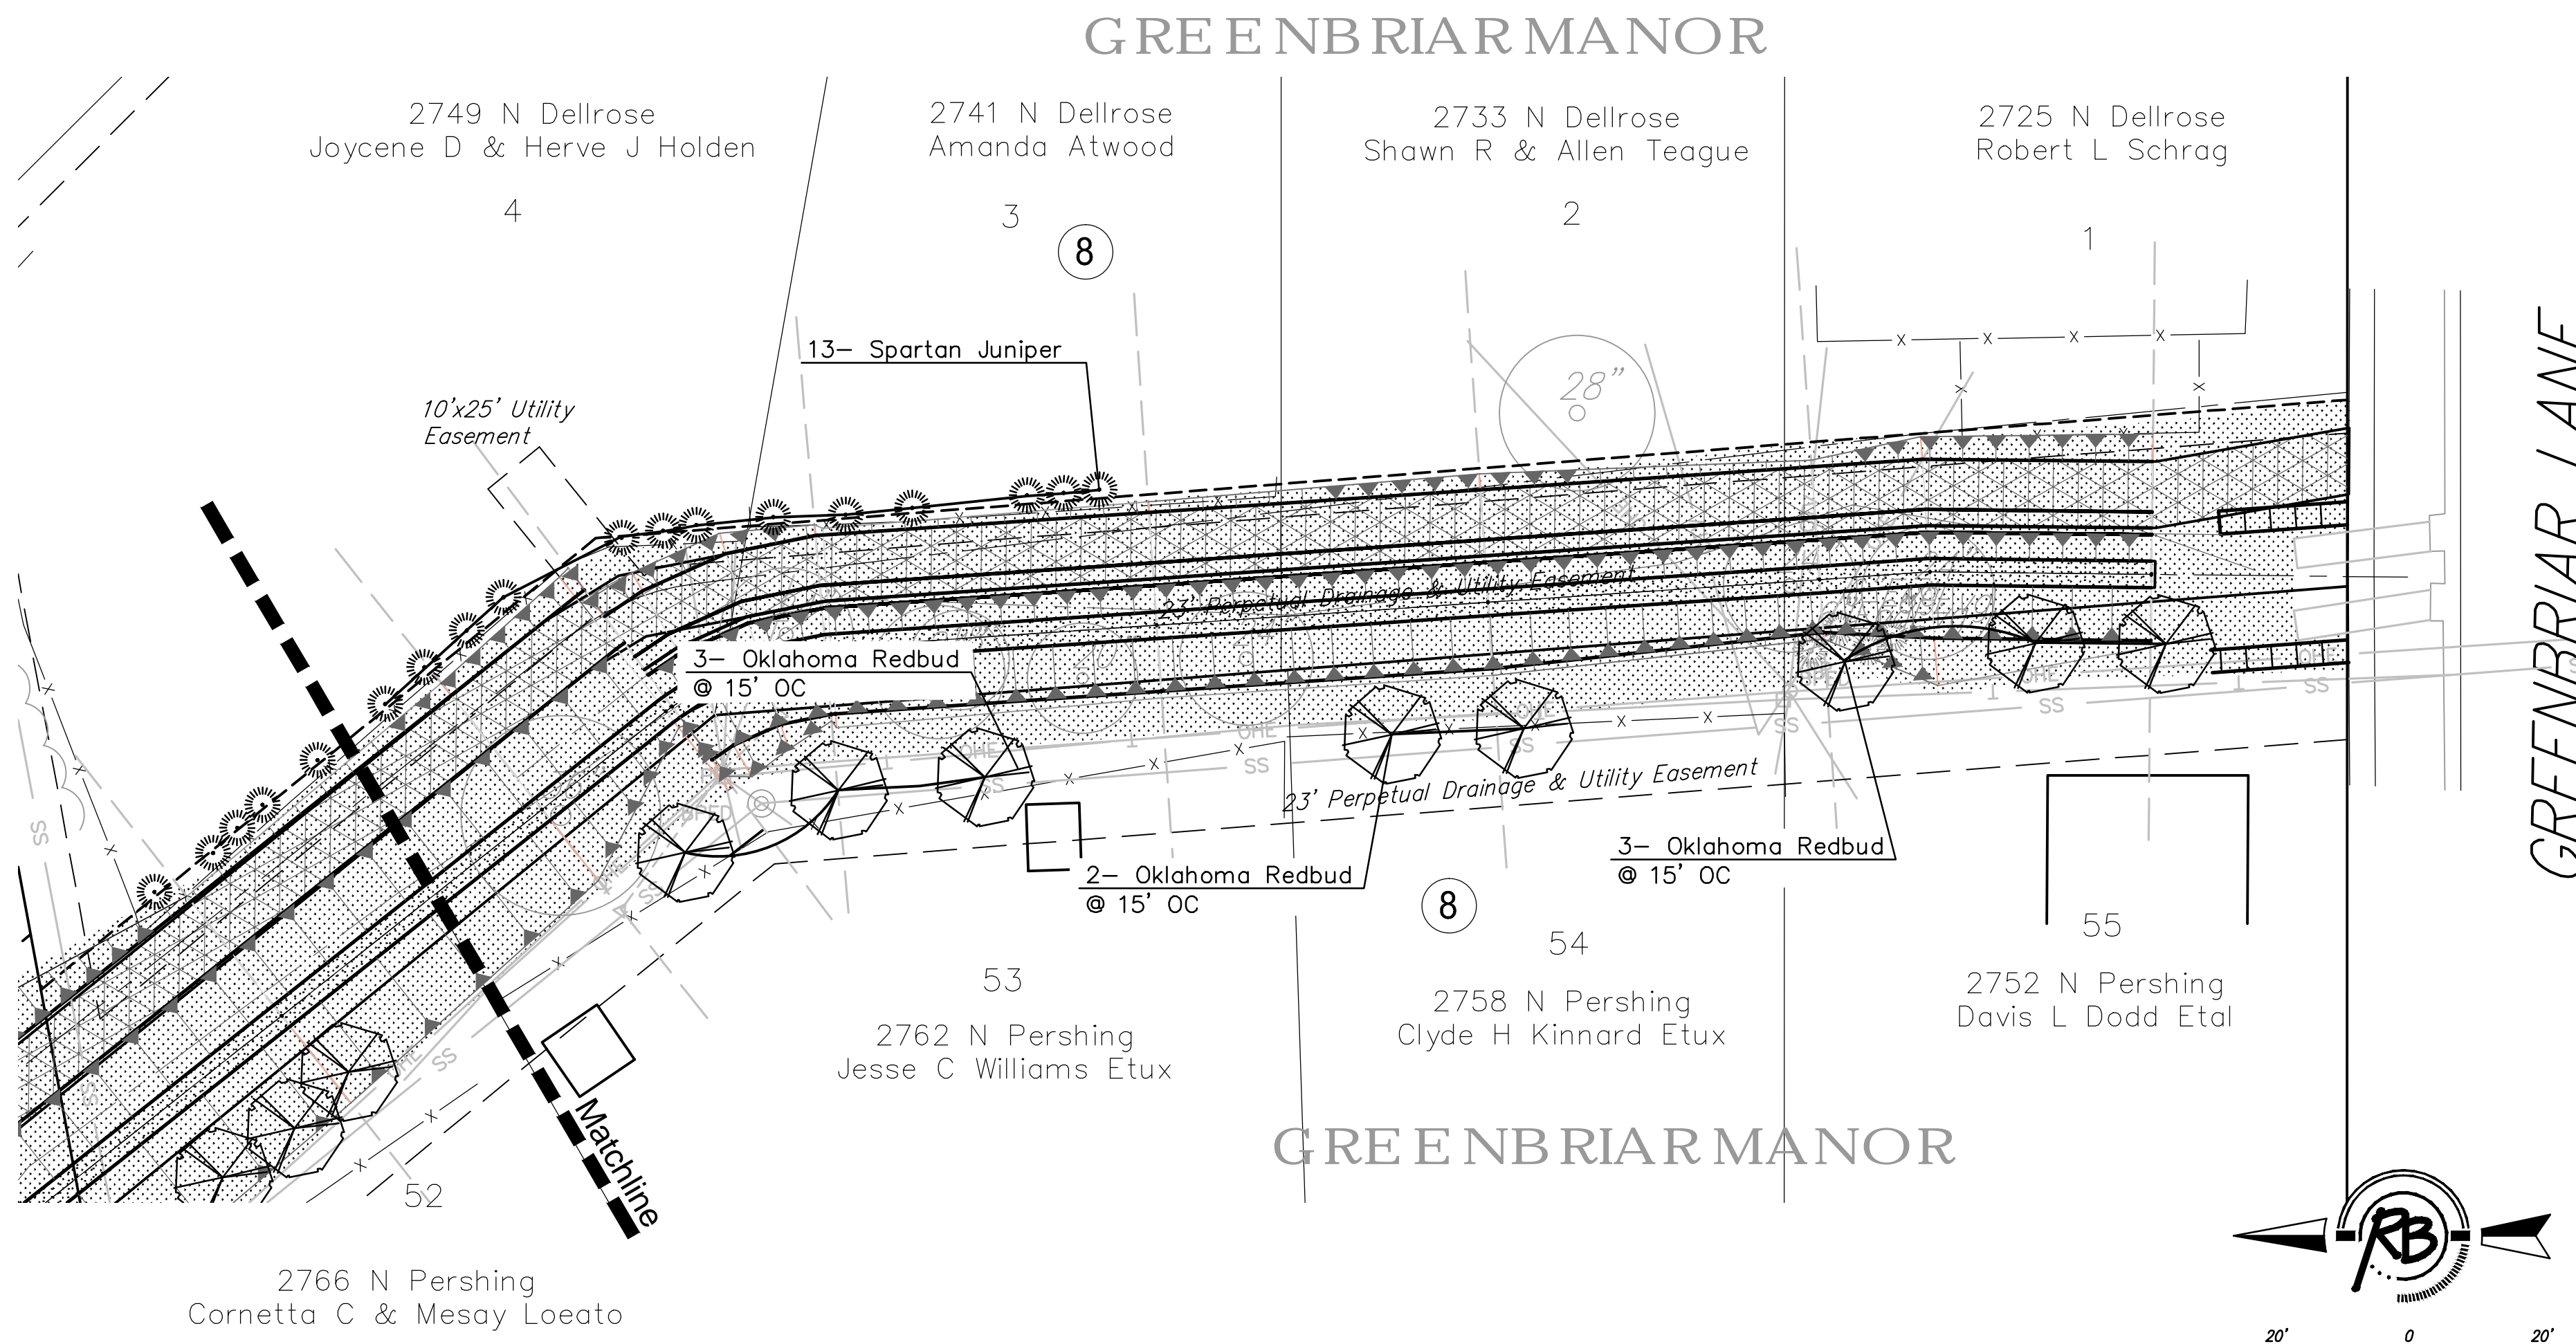


Wichita Chr. Campus Crest LLC
RESERVE 'A'
FLOOD PLAIN EASEMENT

CAMPUS CREST ADDITION

GREENBRIAR MANOR

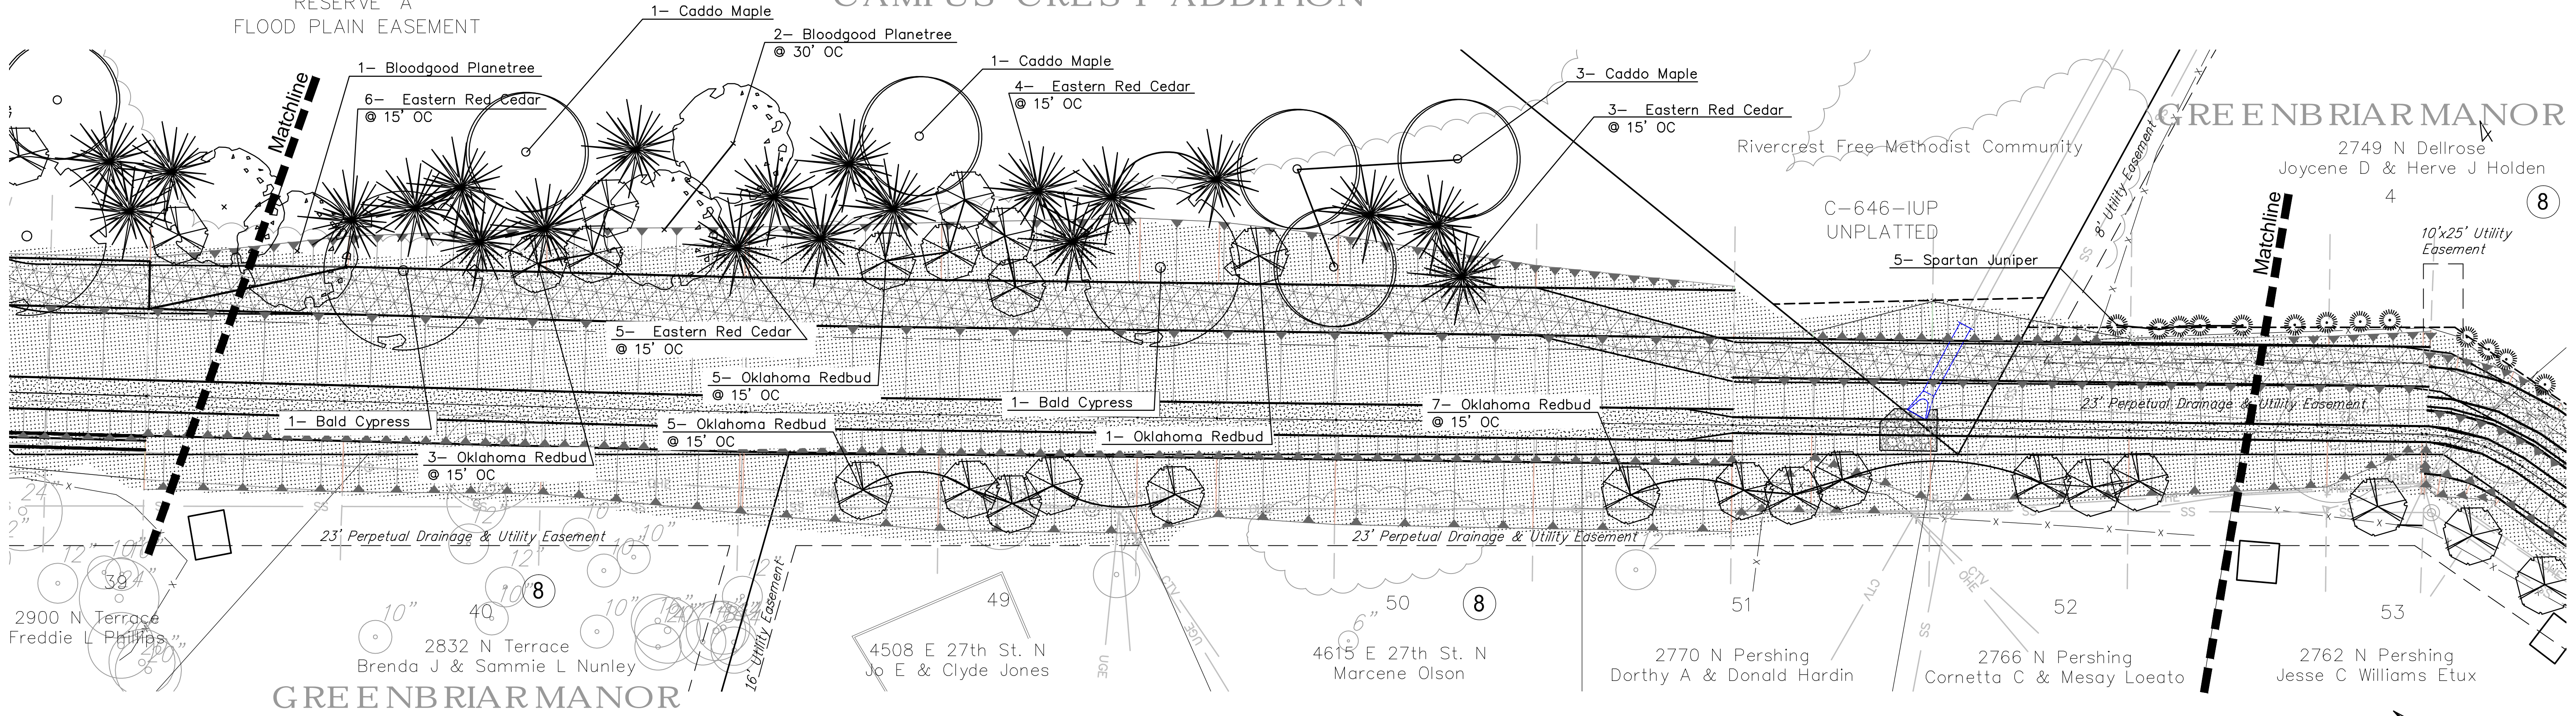

PLANT SCHEDULE

Qty.	Scientific Name	Common Name	Size	Condition	Spacing	Remarks
SHADE TREES						
7	<i>Acer saccharum 'Caddo'</i>	Caddo Maple	2-1/2"	B&B	As shown	Full & Healthy
5	<i>Platanus x acerfolia 'Bloodgood'</i>	Bloodgood London Planetree	2-1/2"	B&B	As shown	Full & Healthy
2	<i>Quercus shumardii</i>	Shumard Oak	2-1/2"	B&B	As shown	Full & Healthy
4	<i>Taxodium distichum</i>	Bald Cypress	2-1/2"	B&B	As shown	Full & Healthy
ORNAMENTAL TREES						
43	<i>Cercis reniformis 'Oklahoma'</i>	Oklahoma Redbud	1-1/2"	B&B	As shown	Full & Healthy
EVERGREEN TREES						
18	<i>Juniperus chinensis 'Spartan'</i>	Spartan Juniper	5-8' Tall	B&B/ Cont.	As shown	Full & Healthy
23	<i>Juniperus virginiana</i>	Eastern Red Cedar	8-10' Tall	B&B	As shown	Full & Healthy

OTHER QUANTITIES



Mulch Subsidiary to Tree Costs
Seed 92,800 SF / 2.1 Acres

NOTE:
Contractor shall coordinate with homeowner(s) when preparing to install trees in backyards.

NOTE:
Seed limits are not all-inclusive. The Contractor is responsible for seeding all areas disturbed by construction and implementing all necessary BMPs.

LEGEND

- SEED MIX
Refer to Sheet 13 for seed specifications.
- DITCH BOTTOM
- ACCESS ROAD

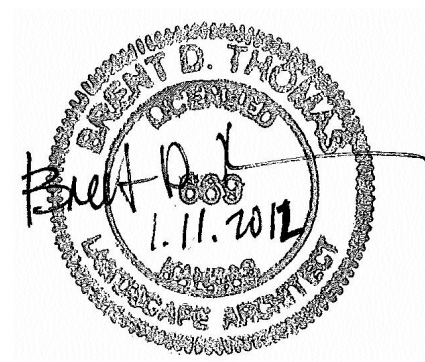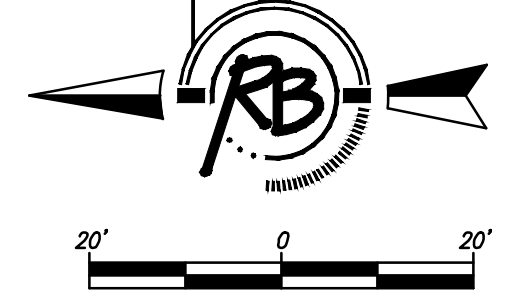

CHANNEL IMPROVEMENTS REVEGETATION PLAN WICHITA, KANSAS

Ruggles & Bohm, P.A.
Engineering, Surveying, Land Planning

924 North Main
Wichita, Kansas 67203
www.rbkansas.com

(316) 264-8008
(316) 264-4621 fax
E-mail: info@rbkansas.com

DESIGN BDT
DRAWN BDT
REVIEW
UTILITY
DATE Jan. 9, 2012

SHEET 11 OF 26

PROJECT NUMBER
DRAWING FILE LANDSCAPE BASE [LSCAPE 2]