




Combined Curb & Gutter (6")

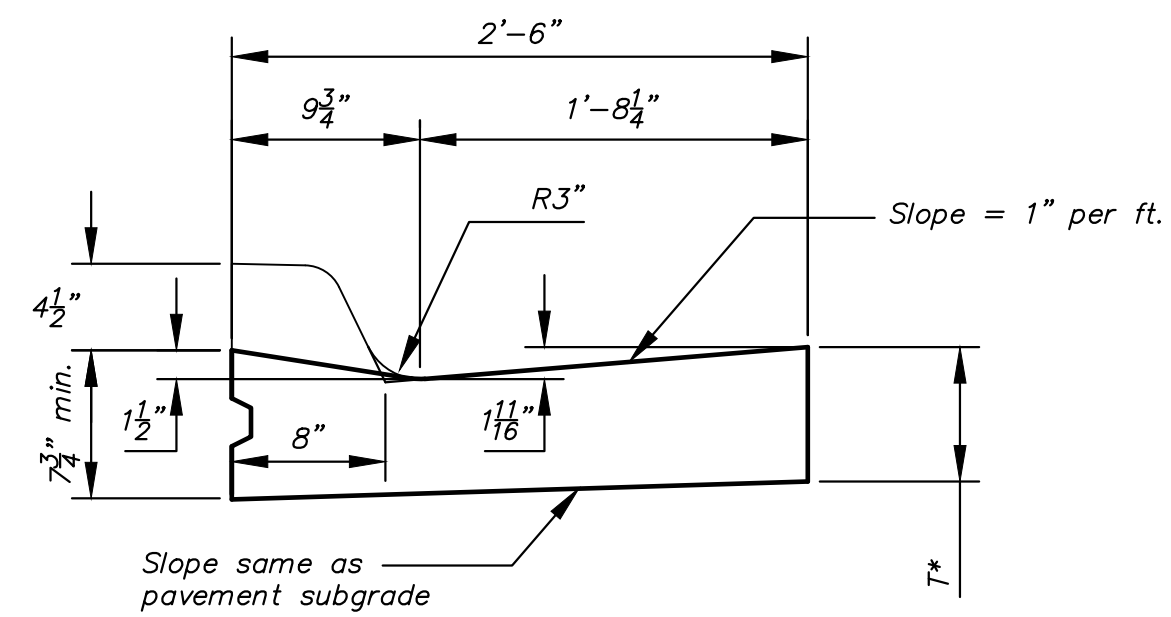


Combined Curb & Gutter (1 1/2")

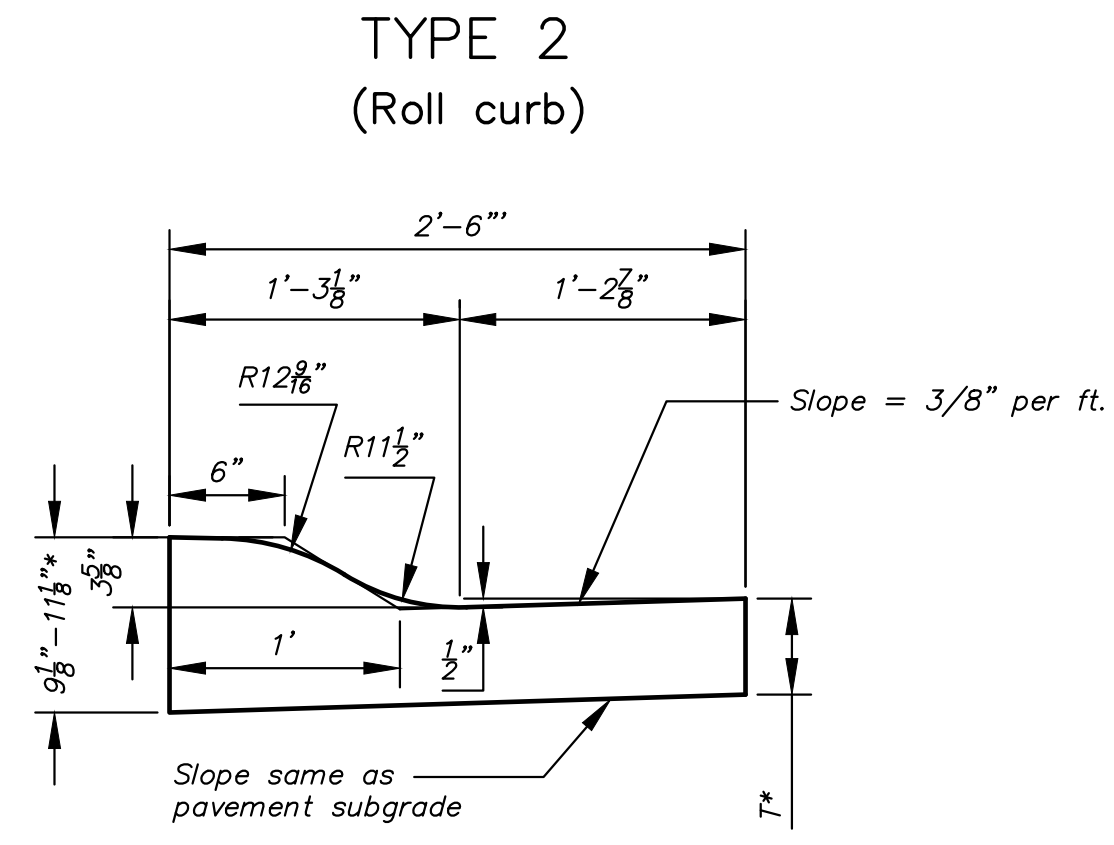


Combined Curb & Gutter (3 5/8")

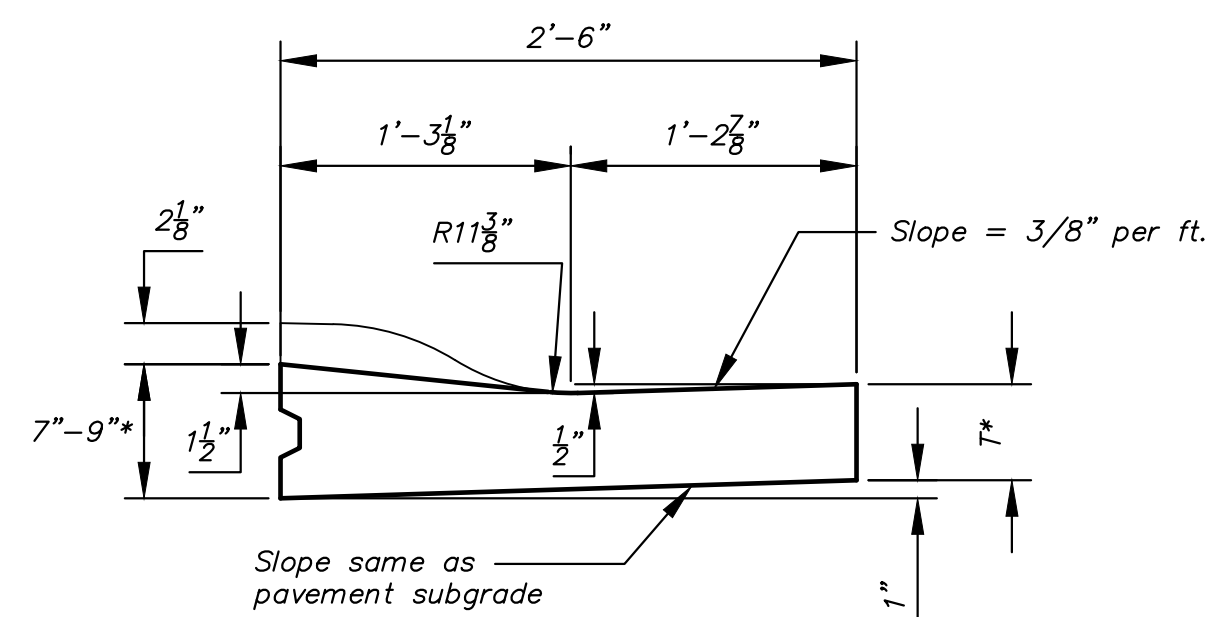


Combined Curb & Gutter (1 1/2")

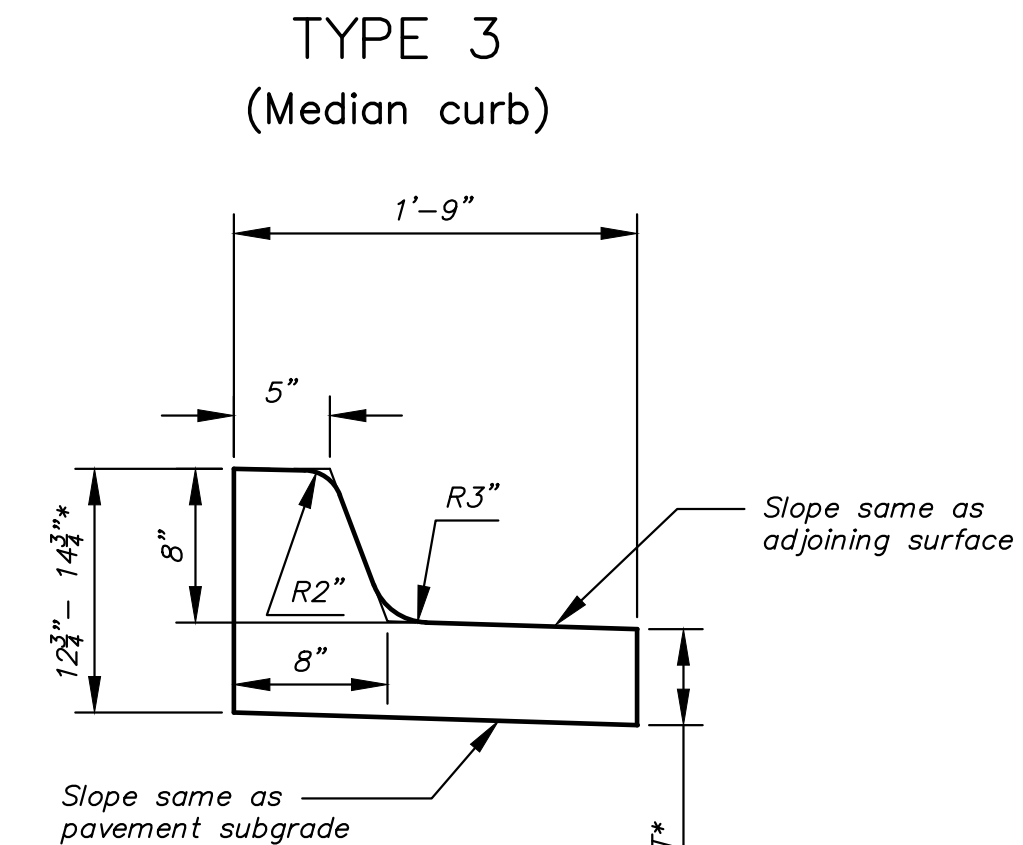


Combined Curb & Gutter (8")

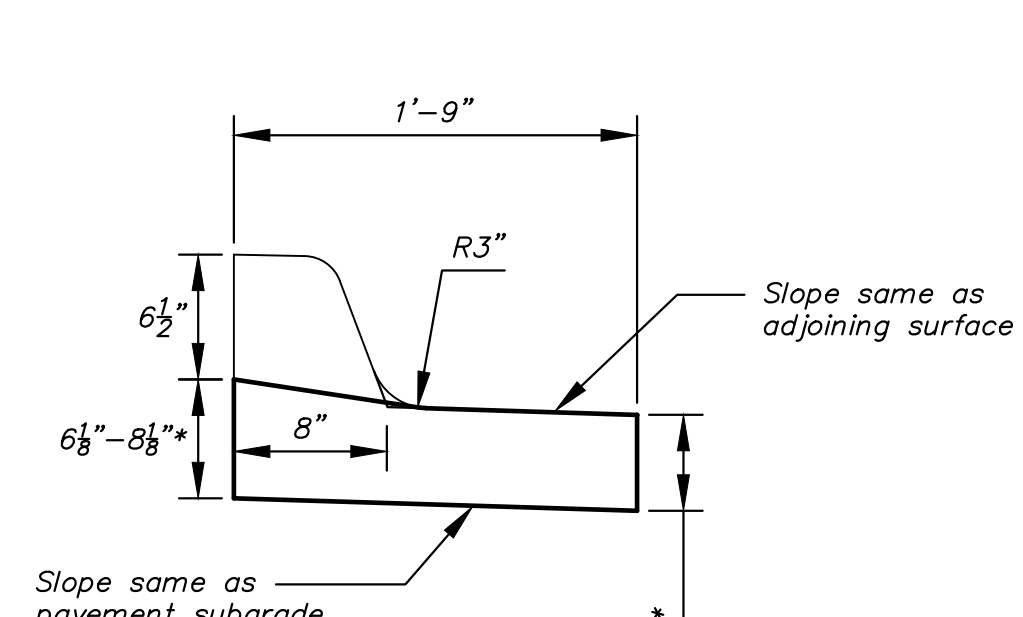

Combined Curb & Gutter (1 1/2")

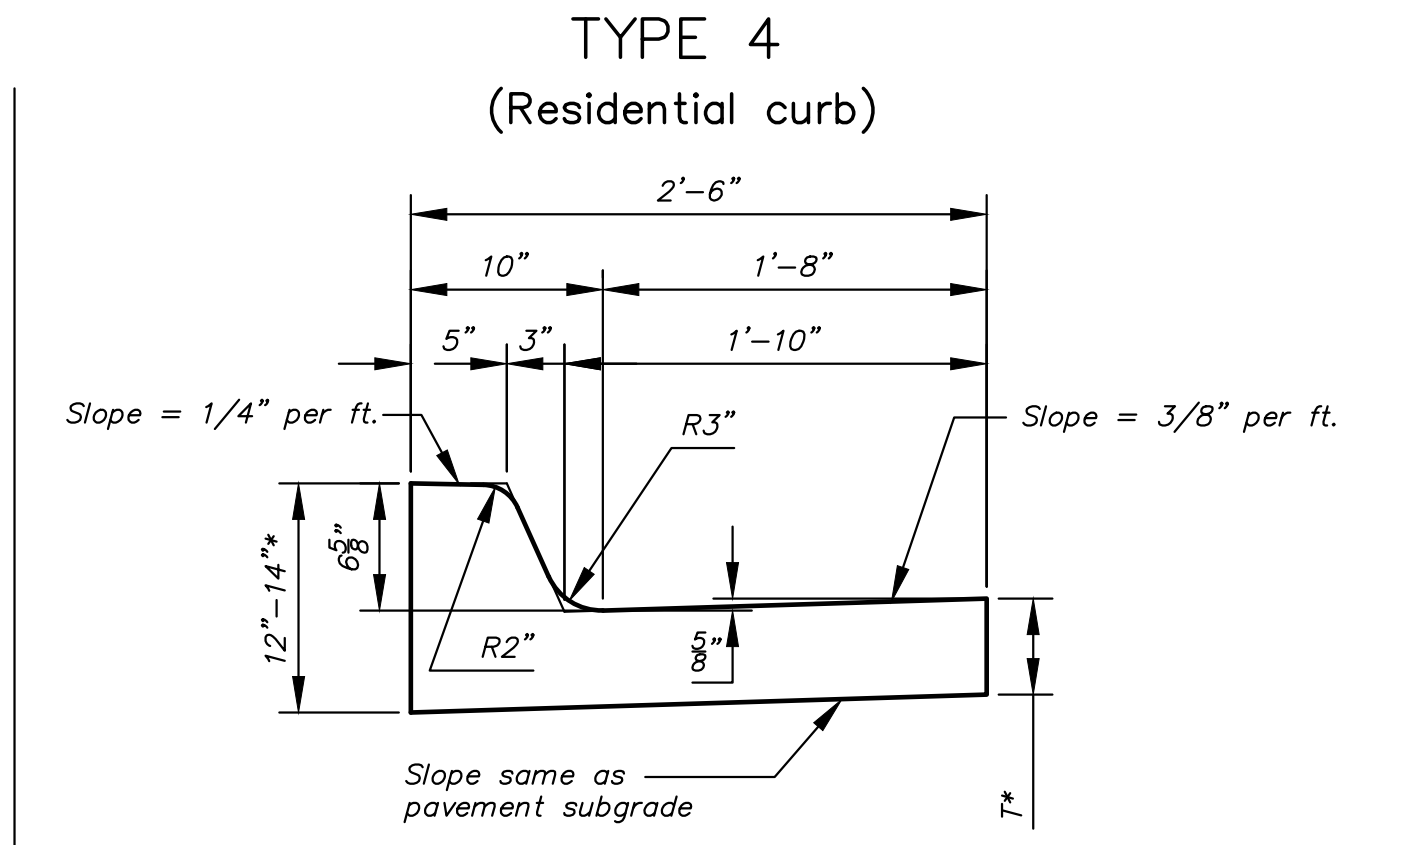


Combined Curb & Gutter (6 5/8")

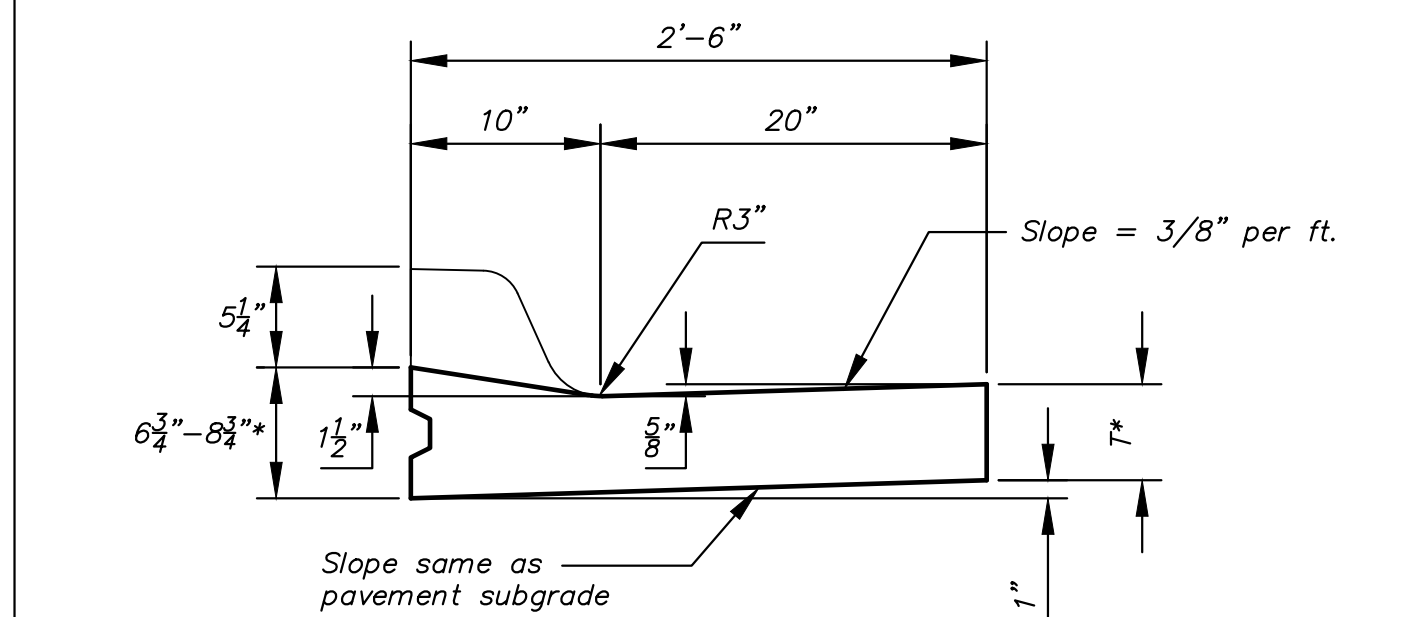


Combined Curb & Gutter (1 1/2")


T\* = Thickness of curb to adjust with pavement thickness

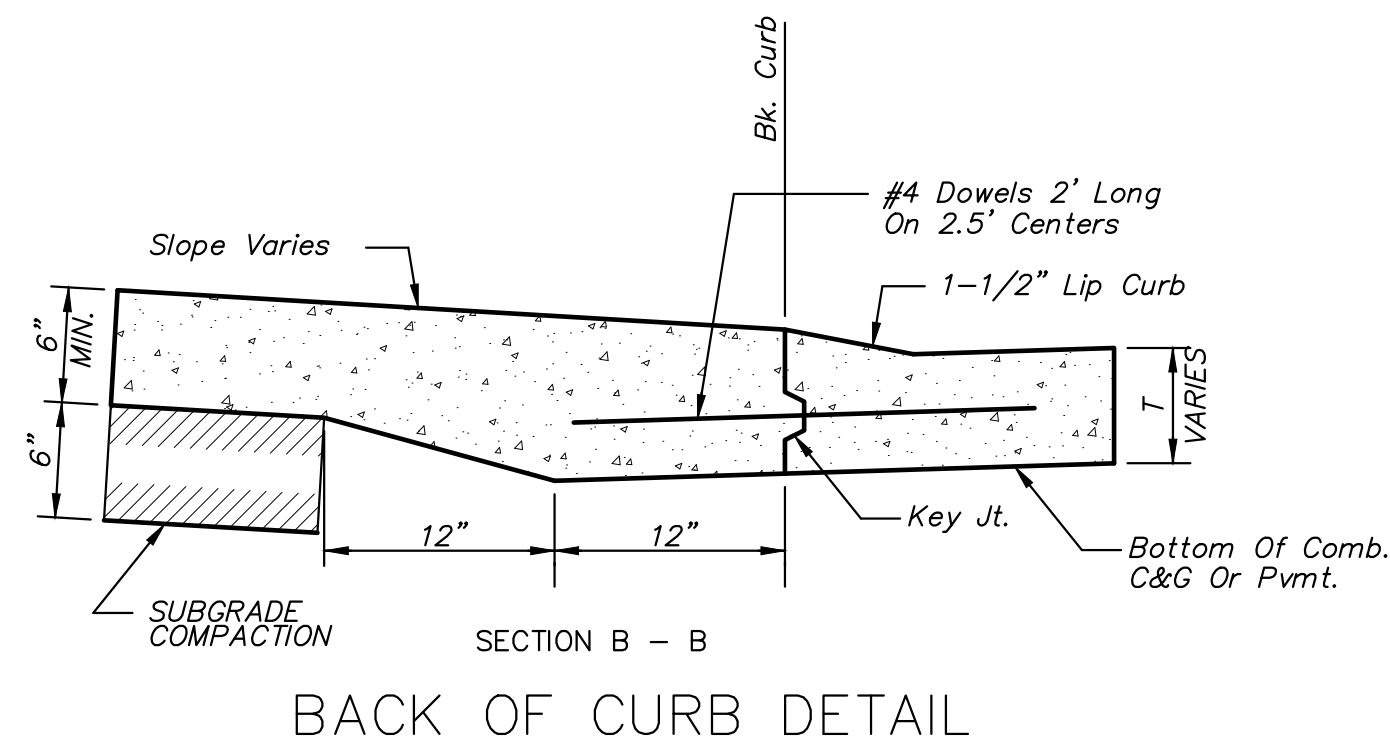


BACK OF CURB DETAIL

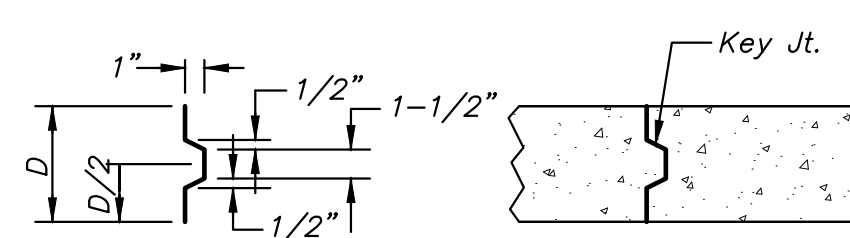

ALT. LONGITUDINAL CONSTRUCTION JOINT

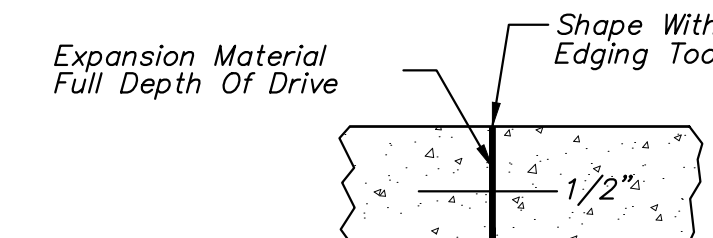

EXPANSION JOINT (E.J.)

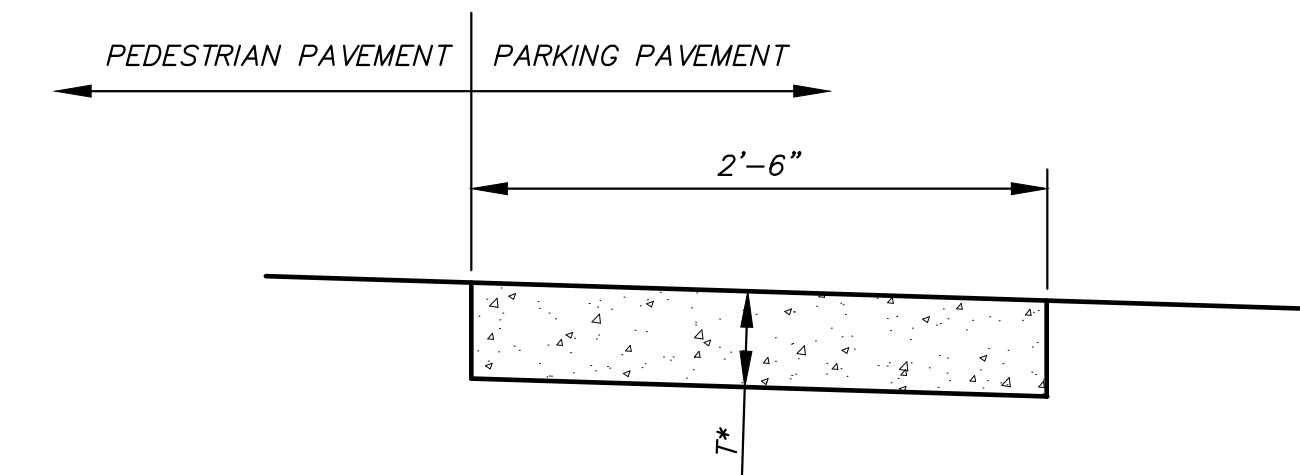

RIBBON CURB

**GENERAL NOTES**

- Expansion (isolation) joints shall be constructed a maximum of 300' apart and at all Pls, PCs, cul-de-sac quadrants, and ends of returns.
- Contraction joints shall be constructed a minimum of 12' apart.
- Joint sealer shall be required at all joints on arterial and industrial streets and at intersections on residential streets.

**STRIPING & SIGNAGE NOTES**

- The Contractor shall be responsible for all site signage and striping as shown on the plans.
- All signs to be placed 2 feet off paved surface unless otherwise noted/depicted.
- Paint all parking stalls with 4 inch wide white stripes. All hatched areas shall be painted with a 4 inch wide, white stripe, 45 degrees to parking stall at 3' O.C.
- Apply all pavement markings with two coats of VOC compliant, local DOT approved, undiluted, solvent base of latex traffic paint.



<b>CURB &amp; GUTTER &amp; PAVING BRICK CROSSWALK DETAILS</b>		
CITY ENGINEER <b>GARY JANZEN, P.E.</b>		
PROJECT NUMBER 482-11034	OCA NUMBER	DATE JULY 2021
CITY ENGINEER'S OFFICE CITY HALL - SEVENTH FLOOR 455 NORTH MAIN STREET WICHITA, KANSAS 67202-1620 (316) 268-4501		SHEET <b>04 OF 31</b>

REVISED: OCTOBER 2015