


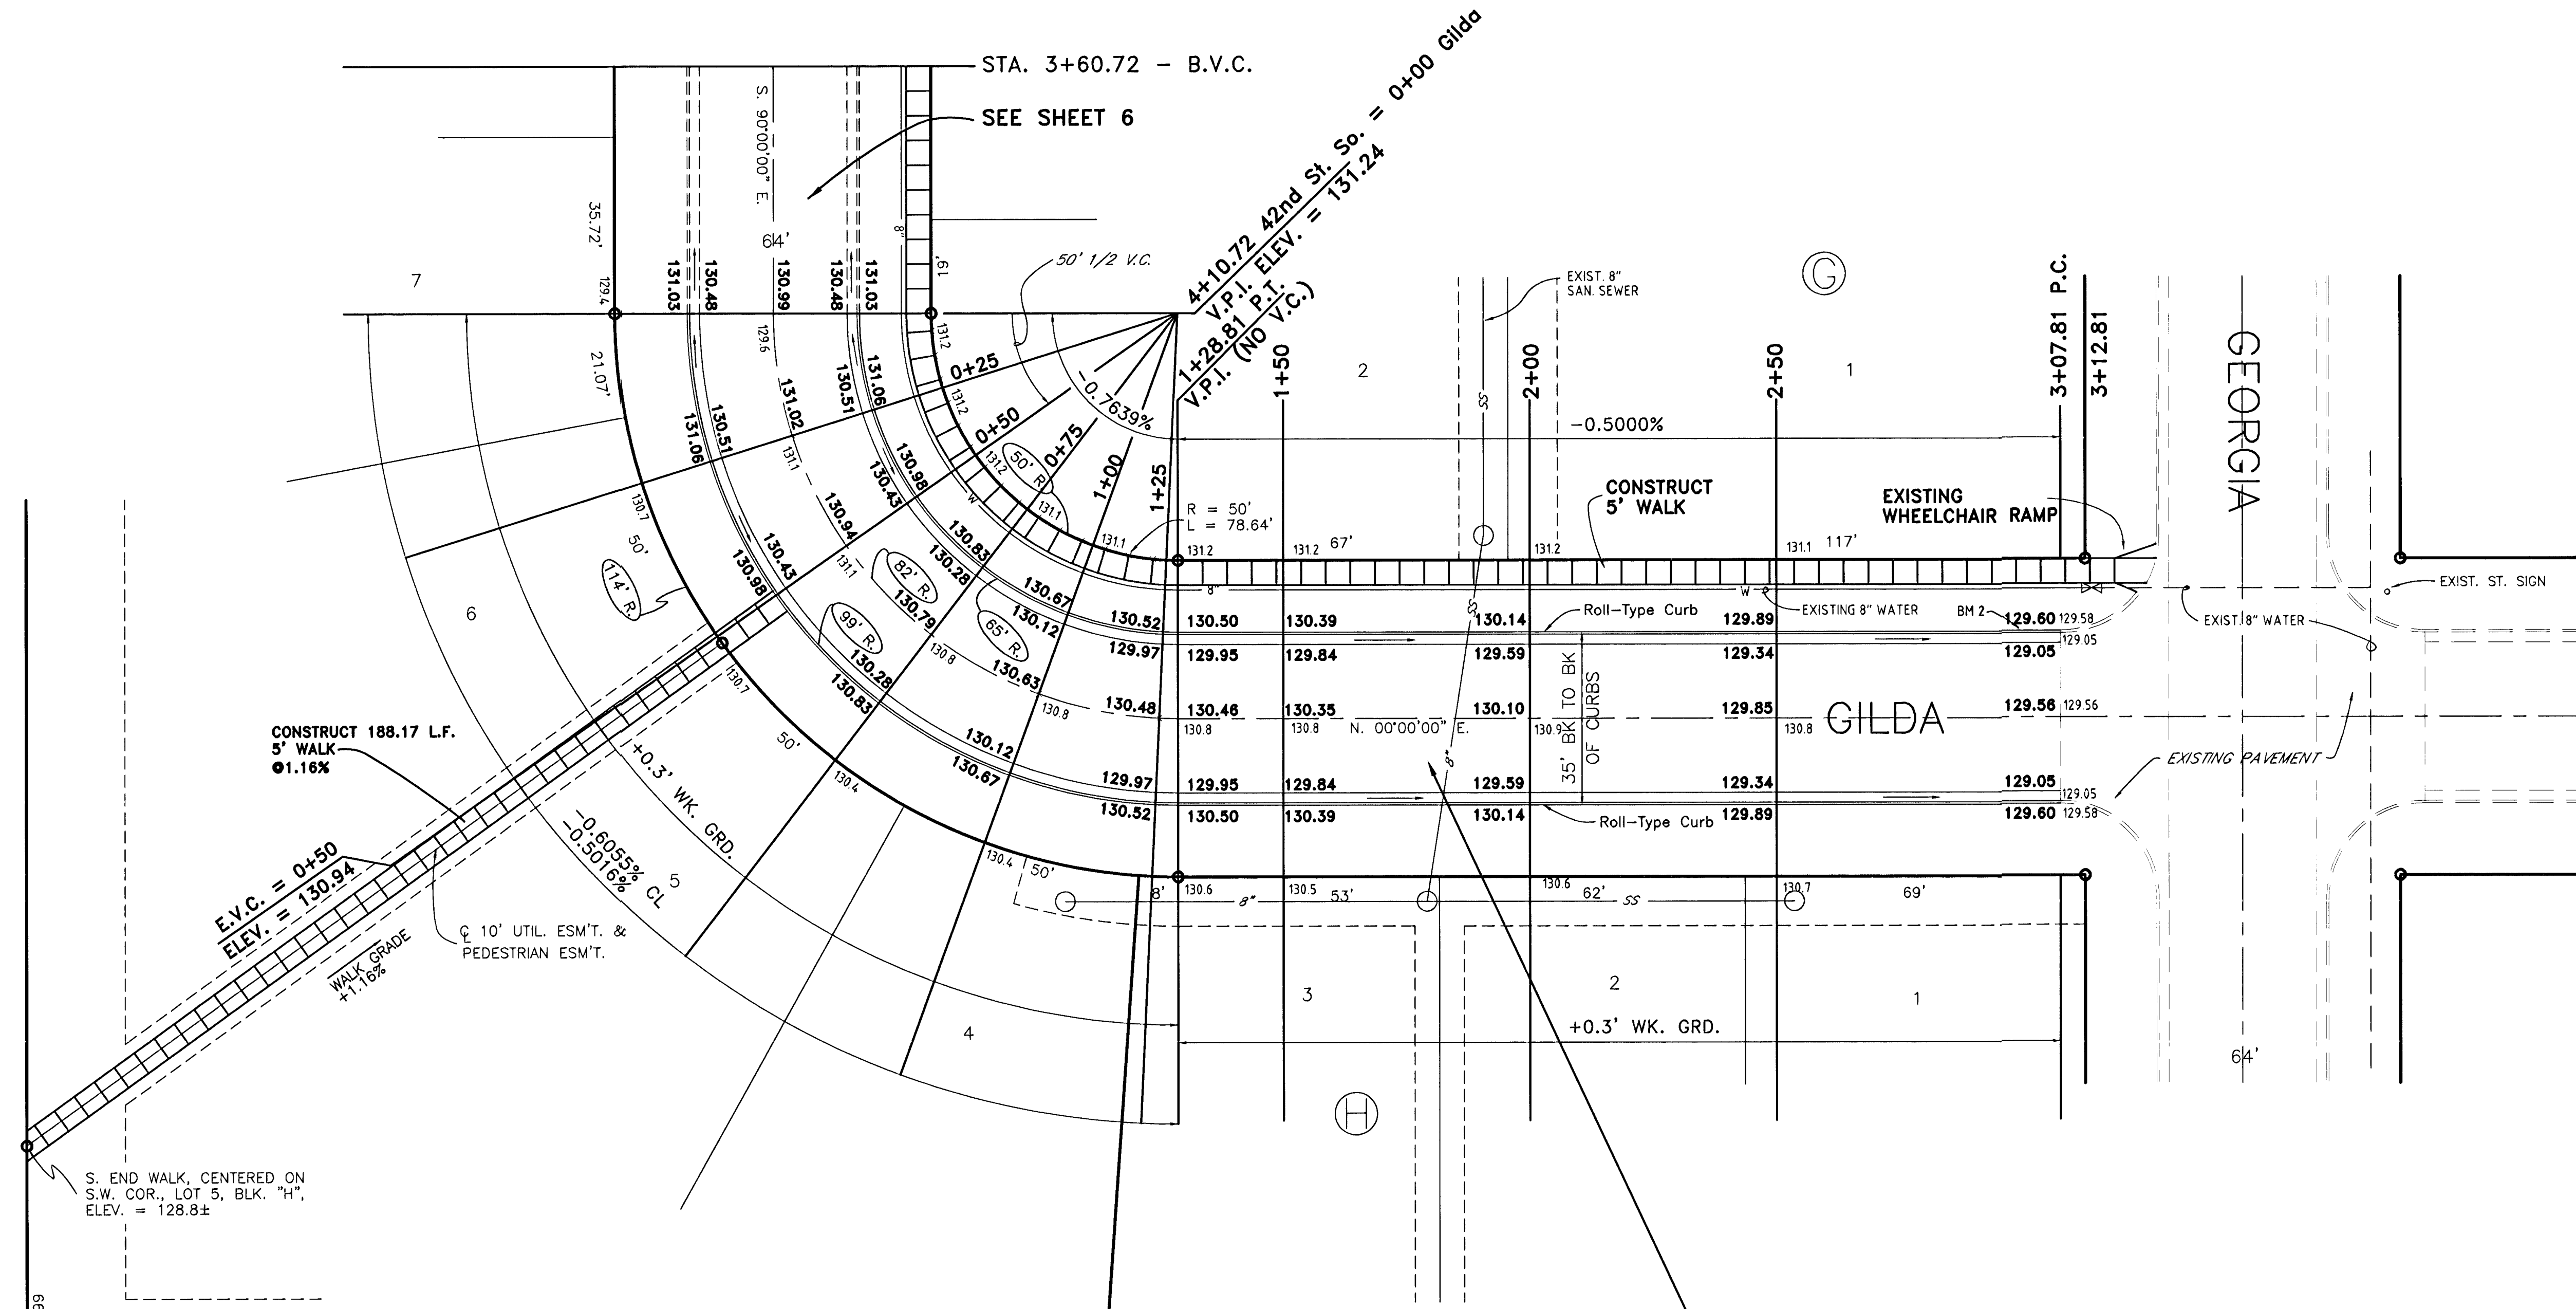

CONSTRUCT 188.17 L.F.
5' WALK
@ 1.16%

E.V.C. = 0+50
ELEV. = 130.94

WALK GRADE
+1.16%

S. END WALK, CENTERED ON
S.W. COR., LOT 5, BLK. "H",
ELEV. = 128.8±

S.E. COR., LOT 5, BLK. "H",
WHEATLAND ADDITION

CURVE DATA BASED ON ϕ					
R = 82'		$\Delta = 90^{\circ}00'00''$		Tan. = 82.00'	
L = 128.81'		LC = 115.97'		Defl. = 20.96187 min/ft.	
Station	Arc	CHORD LENGTHS		Deflection $\angle$	Total Deflection $\angle$
		8' Left of Face	8' Right of Face		
0+00	--	--	--	00°00'00"	00°00'00"
0+25	25'	17.38'	32.62'	08°44'02"	08°44'02"
0+50	25'	17.38'	32.62'	08°44'02"	17°28'04"
0+75	25'	17.38'	32.62'	08°44'02"	26°12'06"
1+00	25'	17.38'	32.62'	08°44'02"	34°56'08"
1+25	25'	17.38'	32.62'	08°44'02"	43°40'10"
1+28.81	3.81'	2.65'	4.97'	01°19'51"	45°00'00"

CONSTRUCT 5" ASPHALTIC CONCRETE PAVEMENT
WITH CRUSHED ROCK BASE ON FABRIC REINFORCEMENT
COMBINED CURB & GUTTER (3 5/8" & 1 1/2")

BENCHMARK

R.R. SPIKE IN H.L.P., 100' N. OF THE
S.E. CORNER OF LOT 5, BLK. H, WHEATLAND
ADDITION. ELEV. = 131.06 CITY DATUM.

GILDA

MOEHRING & ASSOCIATES
CONSULTING ENGINEERS - SURVEYORS

433 S. HYDRAULIC WICHITA, KS.
(316) 263-8291

PROJECT NO. 472-83076

DATE: FEB. 2000

SHEET 7 OF 10